



Relays & Contactors > Electromechanical Relays > SCHRACK SNR Slimline Relay Package



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **1 Form A SPST-NO**

Contact Current Rating: **6 A**

[All SCHRACK SNR Slimline Relay Package \(41\)](#)

Features

Product Type Features

|                        |                             |
|------------------------|-----------------------------|
| Relay & Contactor Type | General Purpose Power Relay |
|------------------------|-----------------------------|

Configuration Features

|                         |                            |
|-------------------------|----------------------------|
| Contact Number of Poles | 1                          |
| Coil Special Features   | UL Coil Insulation Class F |
| Contact Arrangement     | 1 Form A SPST-NO           |

Electrical Characteristics

|                                                     |             |
|-----------------------------------------------------|-------------|
| Contact Limiting Short-Time Current                 | 6 A         |
| Contact Limiting Making Current                     | 10 A        |
| Contact Limiting Continuous Current                 | 10 A        |
| Contact Limiting Breaking Current                   | 6 A         |
| Insulation Initial Dielectric Between Open Contacts | 1000 Vrms   |
| Contact Switching Voltage (Max)                     | 400 VAC     |
| Contact Switching Load (Min)                        | 100mA @ 12V |
| Coil Resistance                                     | 848 Ω       |
| Contact Current Rating                              | 6 A         |
| Coil Voltage Rating                                 | 12 VDC      |
| Contact Voltage Rating                              | 250 VAC     |



|                                                       |           |
|-------------------------------------------------------|-----------|
| Coil Power Rating DC                                  | .17 W     |
| Insulation Initial Dielectric Between Contacts & Coil | 4000 Vrms |

Body Features

|                |                                                    |
|----------------|----------------------------------------------------|
| Product Weight | 6 g[.2116 oz]                                      |
| Enclosure Type | Flux Resistant Automatic Solder Capable & Washable |

Contact Features

|                  |        |
|------------------|--------|
| Contact Material | AgSnO2 |
|------------------|--------|

Termination Features

|                                    |             |
|------------------------------------|-------------|
| Main Termination & Connection Type | Solder Pins |
| Coil Termination & Connection Type | Solder Pins |

Mechanical Attachment

|                    |             |
|--------------------|-------------|
| Product Mount Type | Board Mount |
|--------------------|-------------|

Dimensions

|                                            |               |
|--------------------------------------------|---------------|
| Insulation Creepage Between Contact & Coil | 8 mm[.315 in] |
| Product Width                              | 5 mm[.196 in] |
| Product Length                             | 28 mm[1.1 in] |
| Product Height                             | 15 mm[.59 in] |

Usage Conditions

|                                         |                           |
|-----------------------------------------|---------------------------|
| Operating Temperature Range             | -40 – 85 °C[-40 – 185 °F] |
| Environmental Category of Protection    | RTIII                     |
| Environmental Ambient Temperature (Max) | 85 °C[185 °F]             |

Operation/Application

|                      |                     |
|----------------------|---------------------|
| Solder Process       | Wave Solder Capable |
| Current Type         | DC                  |
| Coil Magnetic System | Monostable          |

Packaging Features

|                  |      |
|------------------|------|
| Packaging Method | Tube |
|------------------|------|

Other

|                                         |            |
|-----------------------------------------|------------|
| Coil Power Rating Class                 | .15 – .2 W |
| Environmental Ambient Temperature Class | 70 – 85 °C |
| Length Class (Mechanical)               | 25 – 30 mm |



|                          |          |
|--------------------------|----------|
| Width Class (Mechanical) | 0 – 6 mm |
|--------------------------|----------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                 |
| Solder Process Capability                     | Wave solder capable to 260°C                                                                                                   |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2-1393236-5  
[V23092-A1024-A302](#)


Customers Also Bought



TE Part #327043  
PG SPD 22-16 COMM 22-18 MIL 6



TE Part #102107-2  
MOD IV PIN LP

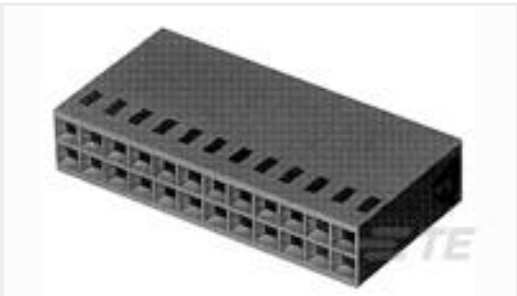


TE Part #1-87456-0  
14 MODIV HSG DR MRKD .100CL




TE Part #3-640601-3  
03P MTA156 CONN ASSY 22AWG LF



TE Part #3-640426-8  
08P MTA156 CONN ASSY 18AWG ORA

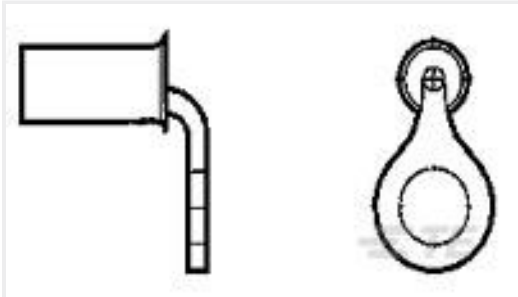


TE Part #321262  
TERM, SOLIS, RT, 22-16, #6, 90 BEND

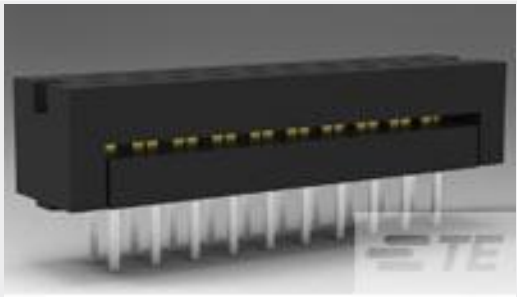


TE Part #2-746610-1  
010 DIP PLUG 100CL TIN



TE Part #2-6609128-8  
6VM1S=F8096

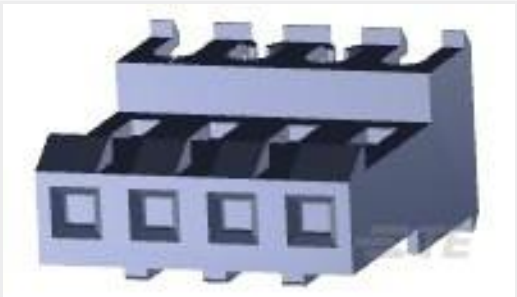

TE Part #3-640601-4  
04P MTA156 CONN ASSY 22AWG LF

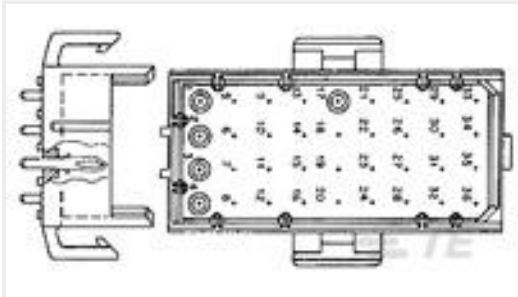

TE Part #640497-3  
02P MR HDR ASSY

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1393236-8\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1393236-8\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1393236-8\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Slim PCB Relay SNR

English

Product Specifications



Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English