

High Current Relay HCR 150

TE Internal #: 1393315-2 High Current Relay, DC, Monostable, 1 Form A (NO), 130 A Contact Rating, 12 VDC Coil Voltage, 3.9 W Coil Power, High Current Relay HCR 150

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: High Current Relay

Current Type: DC

Coil Magnetic System: Monostable

Contact Arrangement: 1 Form A (NO)

Contact Current Rating: 130 A

Features

Product Type Features

Relay & Contactor Type

Configuration Features

Coil Special Features

TE

High Current Relay

Resistor in Parallel

Contact Arrangement

1 Form A (NO)

Electrical Characteristics

Contact Switching Load (Min)	1000mA @ 5VDC
Contact Limiting Making Current	300 A
Coil Resistance	37 Ω
Contact Limiting Continuous Current	180 A
Contact Limiting Breaking Current	300 A
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Current Rating	130 A
Coil Voltage Rating	12 VDC
Coil Power Rating DC	3.9 W
Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
Body Features	
Product Weight	220 g[7.76 oz]
Enclosure Type	Dust Protected

1393315-2

High Current Relay, DC, Monostable, 1 Form A (NO), 130 A Contact Rating, 12 VDC Coil Voltage, 3.9 W Coil Power, High Current Relay HCR 150



Contact Features Contact Material Silver Alloy **Mechanical Attachment** Product Mounting Feature Type Mounting Brackets Dimensions Product Width 45 mm[1.772 in] Product Length 63 mm[2.48 in] Product Height 40 mm[1.772 in] Usage Conditions Environmental Category of Protection RTI Environmental Ambient Temperature (Max) 125 °C[257 °F] **Operation/Application** Current Type DC Monostable Coil Magnetic System Other Contact Current Class >50 A

Environmental Ambient Temperature Class 105 – 125 °C

Height Class (Mechanical)	40 – 50 mm
Length Class (Mechanical)	>60 mm
Width Class (Mechanical)	30 – 40 mm

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

1393315-2

High Current Relay, DC, Monostable, 1 Form A (NO), 130 A Contact Rating, 12 VDC Coil Voltage, 3.9 W Coil Power, High Current Relay HCR 150




Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

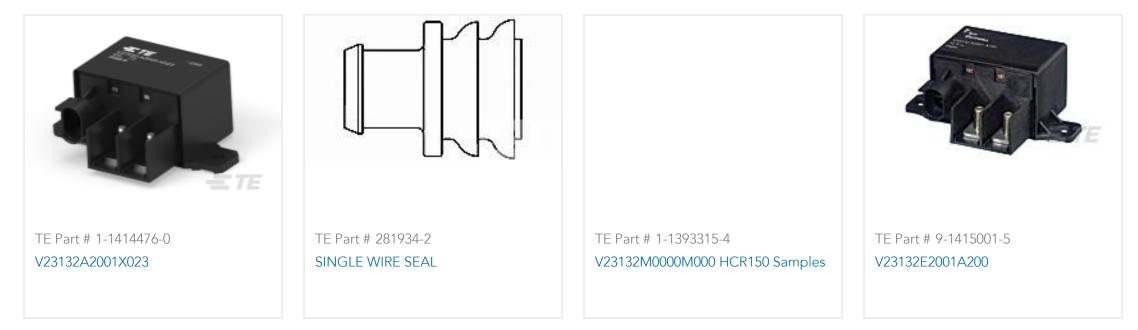

Also in the Series | High Current Relay HCR 150



Customers Also Bought



1393315-2

High Current Relay, DC, Monostable, 1 Form A (NO), 130 A Contact Rating, 12 VDC Coil Voltage, 3.9 W Coil Power, High Current Relay HCR 150







Documents

Product Drawings V23132A2001A200=HCR

English

CAD Files Customer View Model ENG_CVM_CVM_1393315-2_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393315-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393315-2_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Automotive Relay Application Notes

English

Product Specifications Definitions General Purpose Relays

English