### **FASTON**

TE Internal #: 140971-2


Quick Disconnect Tab, 16 – 13.5 AWG, 1.3 – 2 mm<sup>2</sup> Wire, 2565 – 5131 CMA, 6.35 mm [.25 in] Tab Width, Straight, Brass, Tin Plating,

Bag

View on TE.com >



Terminals & Splices > Quick Disconnects

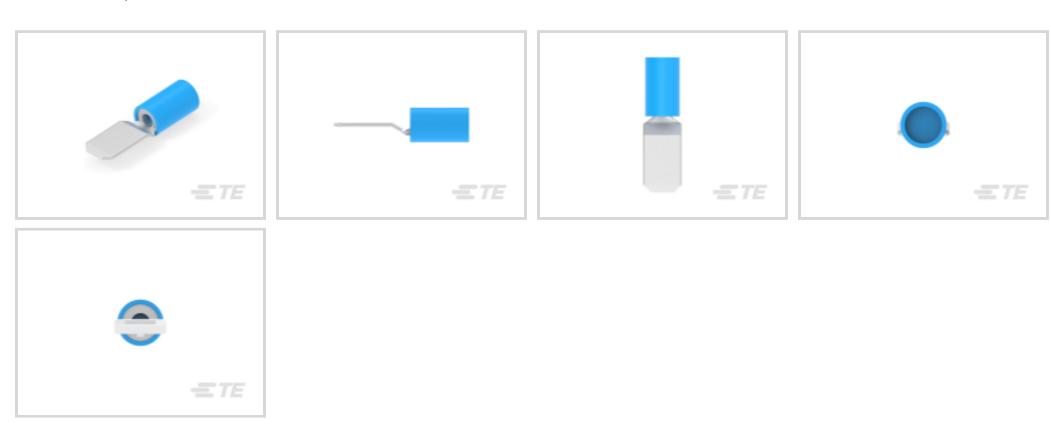

Quick Disconnect Terminal Type: Tab

Wire Size: **2565 – 5131 CMA** 

Mating Tab Width: 6.35 mm [ .25 in ]

## **Features**

## **Configuration Features**

Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Insulation Material	Nylon
Contact Features	
Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression Crimp
Barrel Type	Closed
Termination Features	
Product Terminates To	Wire & Cable

Mechanical Attachment



Wire Insulation Support	Without
Dimensions	
Product Length	23.5 mm[.925 in]
Compatible Insulation Diameter Range	3.9 mm[.154 in]
Wire Size	2565 – 5131 CMA
Usage Conditions	
Insulation Option	Partially Insulated
Packaging Features	
Packaging Quantity	500
Packaging Method	Bag
Other	
Barrel Color	Blue

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690971273) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# Compatible Parts

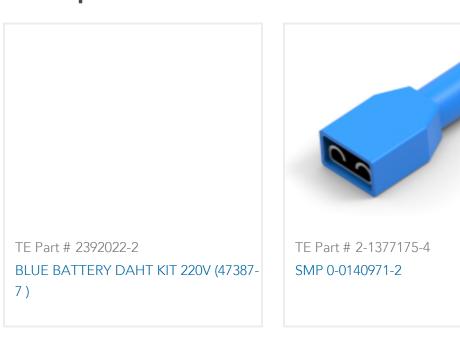





## Customers Also Bought





















### **Documents**

Product Drawings
FASTON PIDG TAB 250 SER

English



**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_140971-2\_L.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_140971-2\_L.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_140971-2\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

PIDG TERMINALS & SPLICES Quick Reference Guide

English