




Connectors > PCB Connectors > Board-to-Board Connectors > Board-to-Board Jumpers & Shunts

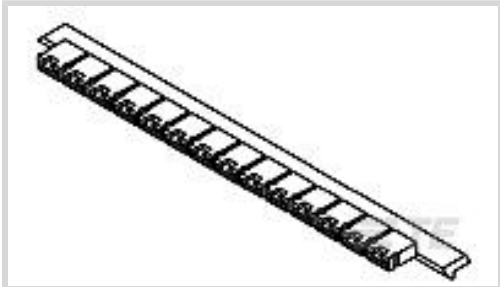

Shunt Style: **Open Top**
Number of Positions: **2**
Centerline (Pitch): **2.54 mm [.1 in]**
Contact Current Rating (Max): **3 A**
Circuit Application: **Signal**

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board

Configuration Features

Number of Positions	2
---------------------	---

Body Features

Primary Product Color	Green
Handle	Without

Contact Features

Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Beryllium Copper
Contact Mating Area Plating Material Thickness	1 µm[39.37 µin]
Shunt Style	Open Top
Contact Current Rating (Max)	3 A

Housing Features

Housing Material	Glass-Filled PBT
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Product Height	6.3 mm[.248 in]
----------------	-----------------



Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL

Packaging Features

Jumper & Shunt Packaging	Breakaway Strip of 14 Pieces
Packaging Method	Box
Packaging Quantity	1400

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 142270-1
CONNECTOR SHUNT 2 P

Customers Also Bought

TE Part #1-338728-6
MICROM. MOB SMD CON

TE Part #1571999-9
ADP04STR04=PIANO DIP SWITCH

TE Part #42117-2
250 FASTON TAB TPBR

TE Part #825437-9
MOD 2 PINHDR 1X09P.

TE Part #5-2176330-0
CRGP 2010 120K 1%

TE Part #640498-4
03P MR HDR ASSY V0

TE Part #2-1445057-3
MICRO MNL HDR ASSY SINGLE ROW

TE Part #215460-8
MICRO-MATCH FEM.SE

TE Part #640502-3
12P MR HDR ASSY V0

TE Part #1-963448-2
2,8MESSERLEISTE 29P

Documents

Product Drawings
CONNECTOR SHUNT 2 P

English

CAD Files
3D PDF
3D



Customer View Model

[ENG_CVM_CVM_142270-5_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_142270-5_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_142270-5_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English

[STRAP D'INTERCONNEXION AU PAS DE 2,54 mm](#)

English