1437259-6 - ACTIVE

TE Internal #: 1437259-6 C-Clip PCB Spring Contact, 4 mm [.157 in] Uncompressed Height, 7 mm [.276 in] Length, 2.5 mm [.098 in] Width, 2.6 mm [.102 in] Working Range (Low)

View on TE.com >

connectivity

Connectors > Contacts > PCB Spring Contacts



Spring Finger Type: C-Clip

Scalable: No

Side Protected: No

Uncompressed Height: 4 mm [.157 in]

Product Length: 7 mm [.276 in]

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board	
Connector System	Board-to-Board	
Spring Finger Type	C-Clip	
Scalable	No	
Configuration Features		
Number of Positions	1	
Side Protected	No	
Contact Features		
Contact Underplating Material	Nickel	
Contact Base Material	Copper Alloy	
PCB Contact Termination Area Plating Material	Gold	
Contact Working Range (Low)	2.6 mm[.102 in]	
Contact Working Range (High)	3.5 mm[.138 in]	
Point of Contact Area Plating Material	Gold	

1437259-6

C-Clip PCB Spring Contact, 4 mm [.157 in] Uncompressed Height, 7 mm [.276 in] Length, 2.5 mm [.098 in] Width, 2.6 mm [.102 in] Working Range (Low)



Contact Current Rating (Max)	1.5 A
Dimensions	
Uncompressed Height	4 mm[.157 in]
Product Length	7 mm[.276 in]
Product Width	2.5 mm[.098 in]
Usage Conditions	
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Tape & Reel
Packaging Quantity	2000
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Reflow solder capable to 245°C	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

1437259-6


C-Clip PCB Spring Contact, 4 mm [.157 in] Uncompressed Height, 7 mm [.276 in] Length, 2.5 mm [.098 in] Width, 2.6 mm [.102 in] Working Range (Low)



Compatible Parts



Customers Also Bought

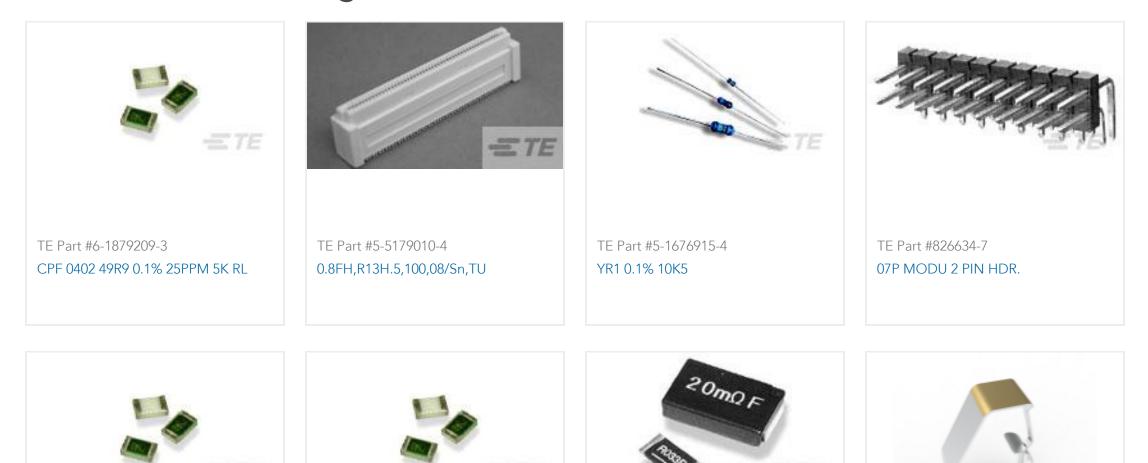

			ETE
TE Part #2-2176217-0	TE Part #7-1879224-8	TE Part #1-1879378-1	TE Part #2339640-1
CPF A 0805 120R 0.1% 25PPM 1K RL	CPF 0603 22K6 0.1% 25PPM 1K RL	TLR 2512 2.0W R002 1% 50PPM 2K RL	SPRING FINGER 6025



Documents

Product Drawings 3100089=SHIELD FINGER

English

CAD Files 3D PDF

1437259-6

C-Clip PCB Spring Contact, 4 mm [.157 in] Uncompressed Height, 7 mm [.276 in] Length, 2.5 mm [.098 in] Width, 2.6 mm [.102 in] Working Range (Low)



3D

Customer View Model ENG_CVM_CVM_1437259-6_B.2d_dxf.zip English Customer View Model ENG_CVM_CVM_1437259-6_B.3d_igs.zip English Customer View Model ENG_CVM_CVM_1437259-6_B.3d_stp.zip English

Products for Mobile Equipment

English

Product Specifications SHIELD FINGER 4025

English

Product Specification

English