




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

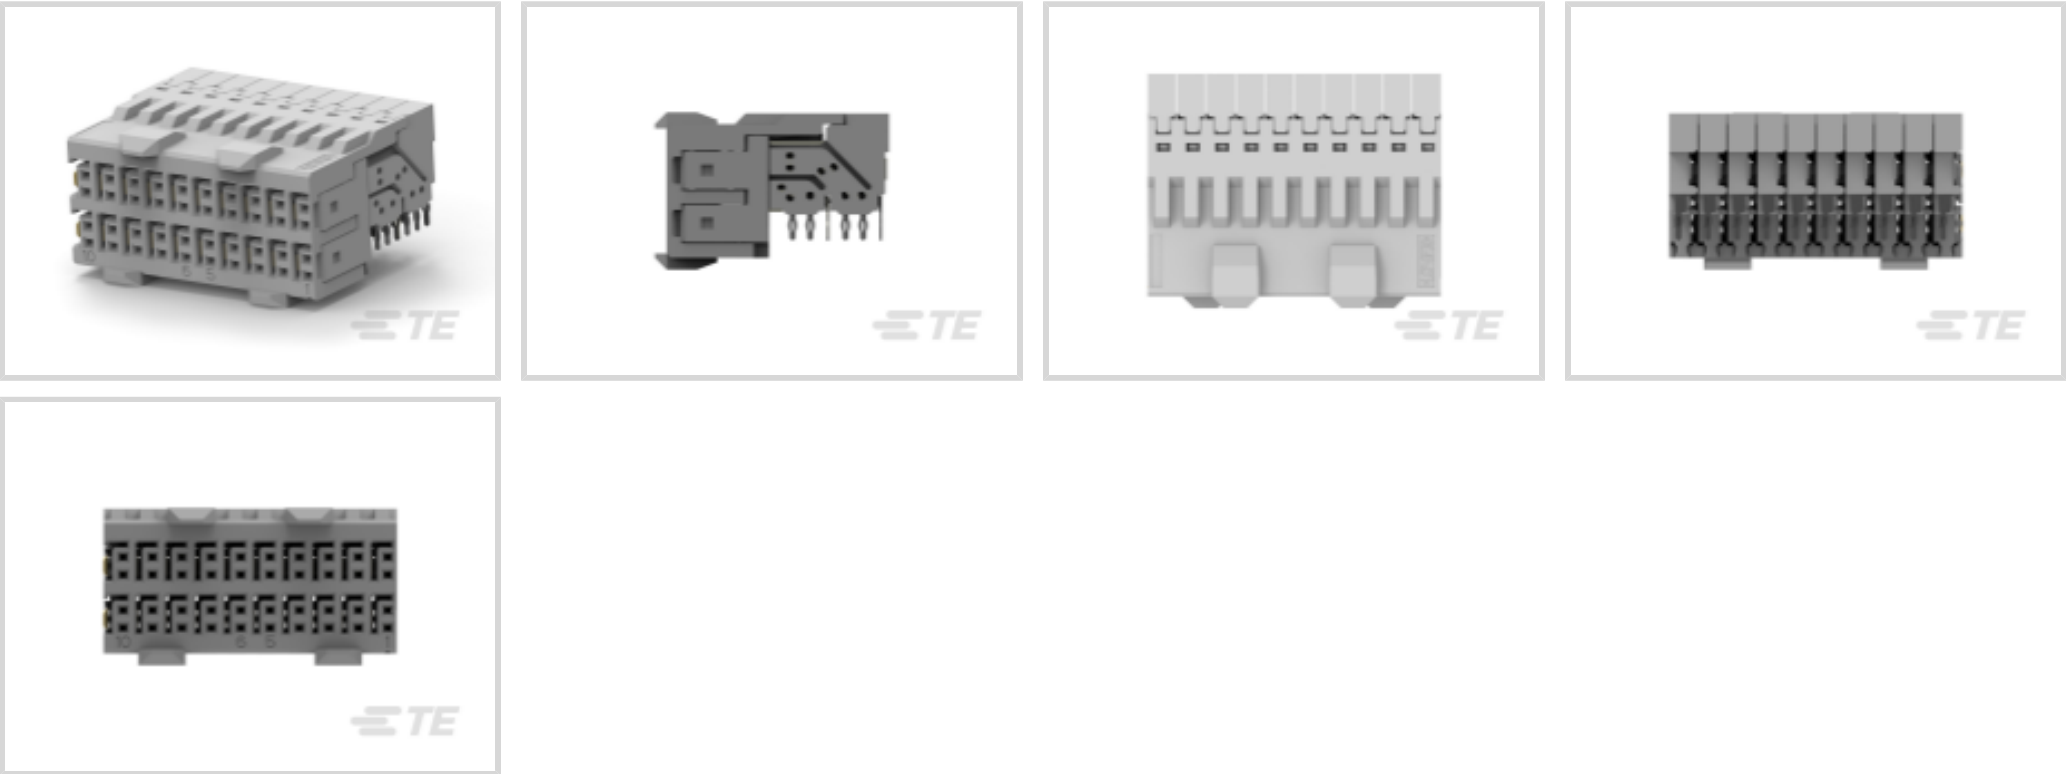

Number of Positions: 40
Row-to-Row Spacing: 1.5 mm [.059 in]
Mating Alignment: With
Mating Alignment Type: Polarization
Number of Rows: 4

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
PCB Connector Type	PCB Mount Receptacle
Shroud Style	Fully Shrouded

Configuration Features

Number of Pairs	20
Number of Ground Positions	20
Number of Signal Positions	40
Pairs per Column	2
Card Slot Centerline	20.3 mm[.8 in]
Number of Positions	40
Number of Rows	4
Number of Columns	10
PCB Mount Orientation	Right Angle



Guide Location	Unguided
Electrical Characteristics	
Operating Voltage	250 VAC
Signal Characteristics	
Data Rate	≤12 Gb/s
Body Features	
Shield Material	Phosphor Bronze
Primary Product Color	Gray
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Layout	Matrix
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Copper Nickel Silicon
Contact Type	Receptacle
Contact Current Rating (Max)	.7 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	2.2 mm[.086 in]
Mechanical Attachment	
Mating Alignment	With
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Polyester GF
Centerline (Pitch)	2.5 mm[.098 in]
Dimensions	
Connector Width	18.9 mm[.744 in]
Connector Height	11.35 mm[.446 in]
Connector Length	24.9 mm[.98 in]
Row-to-Row Spacing	1.5 mm[.059 in]
Usage Conditions	



Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tube
------------------	------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1469323-1
2 PR HEADER ASSY, 40 POSN, PAC

TE Part # 6469054-1
HM-ZD 2PR HDR SELECT LOAD

TE Part # 1469648-1
HM-ZD 2PR HDR 40P QINGDAO PROD.

TE Part # 6469076-2
HM-ZD 2PR HDR ASSY 1.8MM

TE Part # 1469734-1
HM-ZD 2PR HDR 40P SEQ, LF

TE Part # 1469025-1
HM-ZD 2PR HDR 40P 2.5MM

TE Part # 1583249-1
TOOL,REMOVAL,HMZD CHICLET,2PR.

TE Part # 1469205-1
HMZD 2PAIR, 25MM MODULE, 2.5MM

TE Part # 6469025-1
HM-ZD 2PR HDR 40P 2.5MM

TE Part # 91350-1
SEATING TOOL,HMZD RCPT, 2 PAIR

TE Part # 6469314-1
2 PAIR HM ZD HDR ASSY, SEQU, LF

TE Part # 1469314-1
2 PAIR HM ZD HEADER ASSY, SEQU

TE Part # 1583224-1
TOOL,REMOVAL,HMZD RECEPT. HOUS

TE Part # 6469169-1
HMZD 2PR RA HDR 40P

TE Part # 6469025-2
HM-ZD 2PR HDR 40P 3.7MM

TE Part # 6469076-1
HM-ZD 2PR HDR ASSY 1.8MM

Also in the Series | Z-PACK HM-Zd

Hard Metric Backplane Connectors(1)

High Speed Backplane Connectors(46)

Insertion & Extraction Tools(1)

Customers Also Bought



TE Part #2199001-1
SHIELD FINGER 1210 EMBOSS
PACKING



TE Part #1879223-3
CPF 0603 249R 0.1% 25PPM 1K RL



TE Part #1614959-9
CPF0805 1M2 0.1% 25PPM 1K RL




TE Part #1622963-1
CRG0603 1% 510R



TE Part #5177986-5
0.8FH,P05H.5,120,08/Sn,TR,SC




TE Part #CAT-313-PCB160
Plug Connector: Free Height, Board-
Board, Vertical

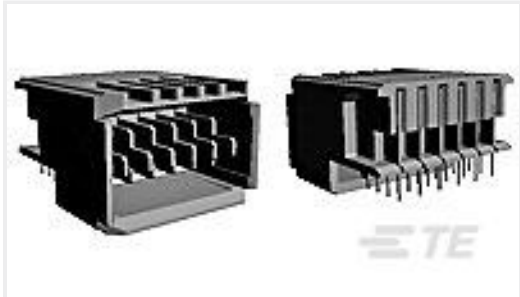

TE Part #120955-1
TE UPM R/A Header 5P HC Power,
LLLLL



TE Part #3-1879223-2
CPF 0603 499R 0.1% 25PPM 1K RL

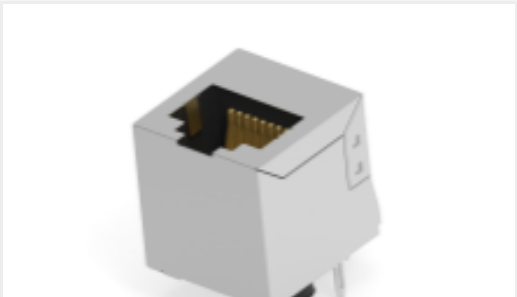

TE Part #133184-E
MJ HS V5 * 8 8 * * * * * 30 * J 3 133819

Documents

Product Drawings

HM-ZD 2PR RECP 40P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1469028-1_F_c-1469028-1-f.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English