

EUROCARD | EUROCARD TYPE M

TE Internal #: 148417-5


Receptacle, Board-to-Board, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 3 Row, Vertical, 26 Column, EUROCARD TYPE M,

Eurocard Connectors

View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > Eurocard Connectors

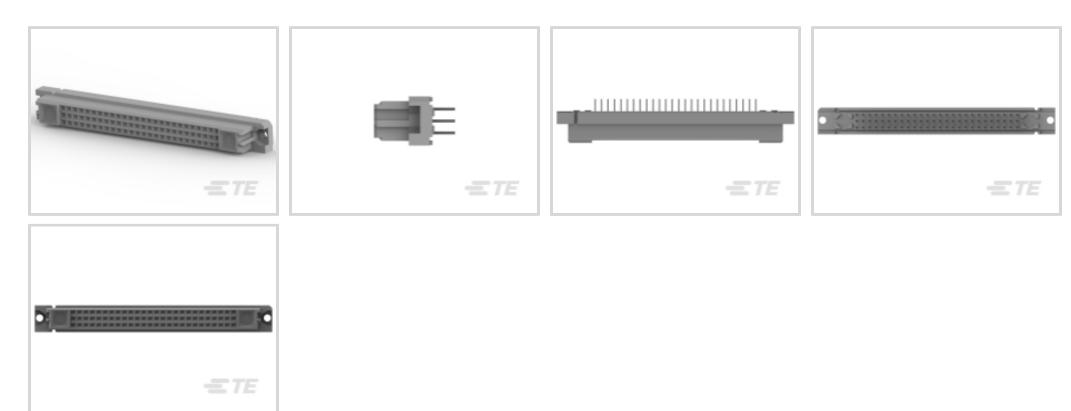

Connector & Housing Type: Receptacle

Connector System: Board-to-Board

Termination Post & Tail Length: 4.83 mm [.19 in]

Centerline (Pitch): 2.54 mm [.1 in]

Connector & Contact Terminates To: Printed Circuit Board

Features

Product Type Features

Connector System Connector & Contact Terminates To Printed Circuit Board DIN Size Half DIN Level II Configuration Features Number of Power or Coaxial Positions 2 Number of Rows 3 PCB Mount Orientation Vertical Number of Columns 26 Rows Loaded A, B, C Number of Signal Positions 78 Body Features	Connector & Housing Type	Receptacle
DIN Size Half DIN Level II Configuration Features Number of Power or Coaxial Positions 2 Number of Rows 3 PCB Mount Orientation Vertical Number of Columns 26 Rows Loaded A, B, C Number of Signal Positions 78	Connector System	Board-to-Board
DIN Level II Configuration Features Number of Power or Coaxial Positions 2 Number of Rows 3 PCB Mount Orientation Vertical Number of Columns 26 Rows Loaded A, B, C Number of Signal Positions 78	Connector & Contact Terminates To	Printed Circuit Board
Configuration FeaturesNumber of Power or Coaxial Positions2Number of Rows3PCB Mount OrientationVerticalNumber of Columns26Rows LoadedA, B, CNumber of Signal Positions78	DIN Size	Half
Number of Power or Coaxial Positions2Number of Rows3PCB Mount OrientationVerticalNumber of Columns26Rows LoadedA, B, CNumber of Signal Positions78	DIN Level	II
Number of Rows3PCB Mount OrientationVerticalNumber of Columns26Rows LoadedA, B, CNumber of Signal Positions78	Configuration Features	
PCB Mount OrientationVerticalNumber of Columns26Rows LoadedA, B, CNumber of Signal Positions78	Number of Power or Coaxial Positions	2
Number of Columns26Rows LoadedA, B, CNumber of Signal Positions78	Number of Rows	3
Rows Loaded A, B, C Number of Signal Positions 78	PCB Mount Orientation	Vertical
Number of Signal Positions 78	Number of Columns	26
	Rows Loaded	A, B, C
Body Features	Number of Signal Positions	78
	Body Features	

Primary Product Color	Gray



Contact Features

Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Tin-Lead
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Type	Socket
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	4.83 mm[.19 in]

Mechanical Attachment

Connector Mounting Type	Board Mount
Panel Mount Feature	Without
Mating Retention	With
PCB Mount Retention Type	Mounting Hole
Mating Alignment	Without
PCB Mount Alignment	Without
PCB Mount Retention	With

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
Connector Height	16.33 mm
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Operation/Application

Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0



Packaging Features

Packaging Method	Box	
------------------	-----	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




04/13/2025 01:17PM | Page 3




Also in the Series | EUROCARD TYPE M

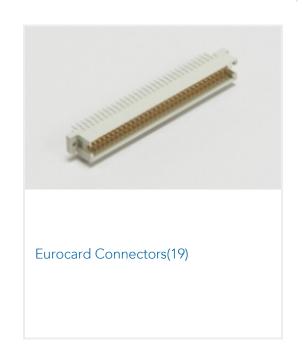

Customers Also Bought

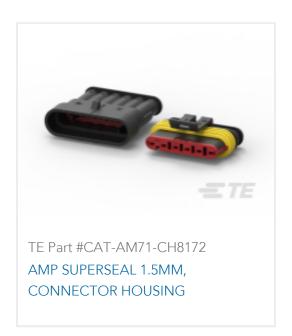



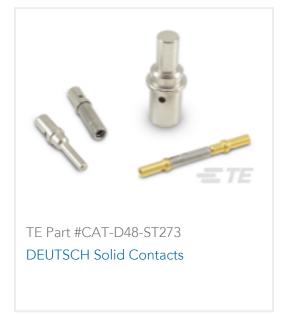







Documents

Product Drawings

EURO TYPE M REC 78+2,THIN STK

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_148417-5_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_148417-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_148417-5_B.3d_stp.zip

Receptacle, Board-to-Board, 2.54 mm [.1 in] Centerline, Printed Circuit Board, 3 Row, Vertical, 26 Column, EUROCARD TYPE M, Eurocard Connectors



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English

Agency Approvals

UL

English