

AMP | NG Power Terminals and Connectors, NG1

TE Internal #: 1544334-1

2 Position Housing, Housing for Male Terminals, Wire-to-Wire, 12 mm [.472 in] Centerline, Black, Wire & Cable, Power, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > 48V Ready 8mm Sealed Connectors



Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Mating Tab Width: 8 mm [.314 in]
Connector System: Wire-to-Wire
Centerline (Pitch): 12 mm [.472 in]

All 48V Ready 8mm Sealed Connectors (4)

Features

Product Type Features

| Mixed & Hybrid Connector | No |
|-----------------------------------|----------------------------|
| Connector Shape | Rectangular |
| Connector & Housing Type | Housing for Male Terminals |
| Connector System | Wire-to-Wire |
| Sealable | No |
| Primary Locking Feature | Integrated in Housing |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| Number of Positions | 2 |
|---------------------|---|
| Number of Rows | 1 |

Electrical Characteristics

| Operating Voltage | 13 VDC |
|------------------------------|--------|
| Nominal Voltage Architecture | 13 V |

Body Features

| Cable Exit Angle | 180° |
|-------------------------|---------|
| Primary Product Color | Black |
| Connector & Keying Code | Neutral |



Contact Features

| Contact Size | 8mm |
|------------------|---------------|
| Contact Type | Receptacle |
| Mating Tab Width | 8 mm[.314 in] |
| | |

Mechanical Attachment

| Strain Relief | Without |
|-----------------------------|----------------------------|
| Terminal Position Assurance | Yes |
| Mating Alignment Type | Keyed |
| Mating Alignment | With |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

| Housing Material | PBT GF |
|--------------------|----------------|
| Centerline (Pitch) | 12 mm[.472 in] |

Dimensions

| Product Width | 65.4 mm[2.575 in] |
|------------------|-------------------|
| Product Length | 31.8 mm[1.252 in] |
| Connector Height | 25 mm[.984 in] |

Usage Conditions

| Operating Temperature (Max) | 125 °C[257 °F] |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 - 125 °C[-40 - 257 °F] |

Operation/Application

| Circuit Application Power | |
|---------------------------|--|
|---------------------------|--|

Industry Standards

| UL Flammability Rating | UL 94HB |
|------------------------|---------|
|------------------------|---------|

Packaging Features

| Packaging Method | Box |
|--------------------|-----|
| Packaging Quantity | 800 |

Other

| Serviceable | Yes |
|--------------------------------------|-----|
| Connector Position Assurance Capable | No |

Product Compliance



For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


































Also in the Series NG1

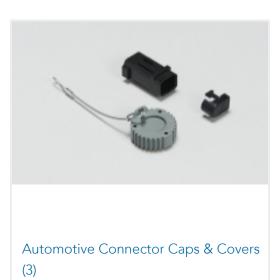

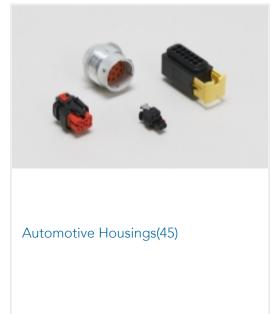

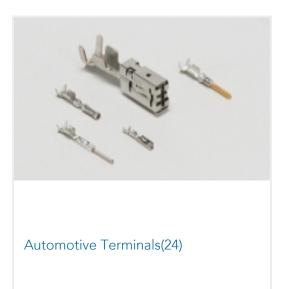

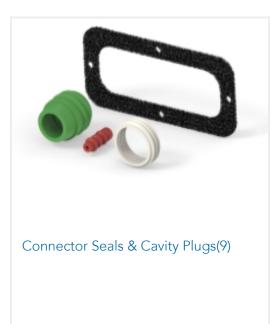

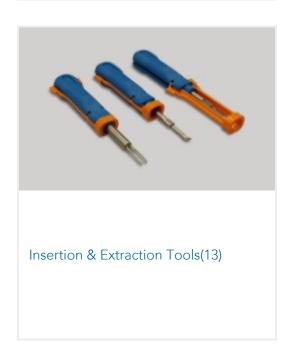

Also in the Series | NG Power Terminals and Connectors





Automotive Connector Caps & Covers (3)



Automotive Housings(45)



Automotive Terminals(24)



Connector Seals & Cavity Plugs(9)



Insertion & Extraction Tools(13)



Other Automotive Connector Accessories(1)

Customers Also Bought



TE Part #2-2380551-0
FAKRA AUT, SOC HSG , SLD, 180DEG,
COD Z



TE Part #1544228-1 CLIP 8 MM NG1-1 PO



TE Part #2109006-1 060 REC(SS) CONT




TE Part #2356607-1 4POS,MCON 1.2,REC HSG ASSY,SLD, COD A



TE Part #1544316-1 JOINT VERT G2




TE Part #2005342-5
2POS MQS TAB SEALED

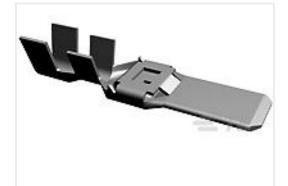

TE Part #1544332-1 LANGUETTE 8MM NG1



1P,MATE-AX,SOC HSG ASSY,SLD, COD A,180

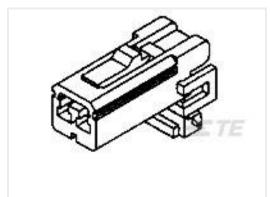

TE Part #282365-1 070MULTILOCK PLUG HSG. 2 POS

TE Part #1-2434680-1 2POS,MQS,TAB HSG,COD A

Documents



Product Drawings

PL 2V 8MM NG1 MONT

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1544334-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_1544334-1_D.3d_stp.zip

English

Customer View Model

ENG_CVM_1544334-1_D.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

French

Instruction Sheets

Instruction Sheet (non U.S.)

English