



Connectors > Terminal Blocks & Strips > Barrier Strips



Number of Positions: 5
Barrier Strip Style: **Dual Barrier**
Connector System: **Wire-to-Wire**
Centerline (Pitch): **9.53 mm [.375 in]**
Number of Rows: 2

Features

Product Type Features

| | |
|-----------------------------------|------------------|
| Block Style | Non-Feed Through |
| Connector System | Wire-to-Wire |
| Connector & Contact Terminates To | Wire & Cable |

Configuration Features

| | |
|---------------------|---|
| Number of Levels | 1 |
| Number of Positions | 5 |
| Number of Rows | 2 |

Electrical Characteristics

| | |
|-------------------|-------|
| Operating Voltage | 300 V |
|-------------------|-------|

Body Features

| | |
|------------------------------------|--------------|
| Quick Connect Tab Plating Material | Tin |
| Primary Product Color | Black |
| Product Orientation | Vertical |
| Barrier Strip Style | Dual Barrier |

Contact Features

| | |
|------------------------------|-------|
| Contact Base Material | Brass |
| Contact Current Rating (Max) | 20 A |

Mechanical Attachment



| | |
|-------------------------|-------------------|
| Mounting Options | End Mounting Ears |
| Screw Plating Material | Nickel |
| Screw Material | Steel |
| Thread Size | 6-32 |
| Connector Mounting Type | Panel Mount |

Housing Features

| | |
|--------------------|------------------|
| Housing Material | Thermoplastic |
| Centerline (Pitch) | 9.53 mm[.375 in] |

Dimensions

| | |
|----------------|------------------|
| Product Length | 64.7 mm[2.55 in] |
| Wire Size | 22 – 12 AWG |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 120 °C[-40 – 248 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|---------------------|-------|
| Circuit Application | Power |
|---------------------|-------|

Industry Standards

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

| | |
|--------------------|--------|
| Packaging Method | Carton |
| Packaging Quantity | 150 |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

| | |
|---|--|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |



Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1546307-5
5P .374" DR BARRIER,W/WASHER


Customers Also Bought




TE Part #770252-1
UMNL II PIN PTPBR LP 24-18




TE Part #7-2213766-7
AV19 DPL 3A POWER LED BLUE 12V




TE Part #8-36151-1
PIDG R 22-16COMM 22-18MIL 6




TE Part #2-31811-3
TERMINAL 4 SOLIS RING 1/4




TE Part #770040-1
09P UMNL II PLUG REAR 94VO



TE Part #1-1546306-8
18P.374" DR BARRIER STRIP




TE Part #321867
TERMINAL SOLIS RING 1/0 5/16



TE Part #770053-1
09P UMNL II CAP-FRONT 94VO



TE Part #50831
[TERMINAL,PIDG PTFE R 22-20 4](#)

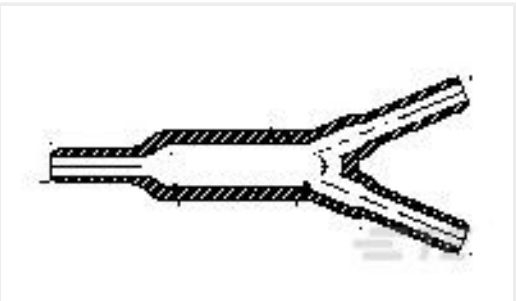

TE Part #820016-000
[381A015-3/42-0](#)

Documents

Product Drawings

[5P .374" DR BARRIER STRIP](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1546306-5_K1.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1546306-5_K1.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1546306-5_K1.3d_igs.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[BUCHANAN TERMINAL BLOCKS CATALOG - BARRIER STRIPS](#)

English

[1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE](#)

English

Agency Approvals

[UL](#)

English