1551629-3 - ACTIVE

TE Internal #: 1551629-3 A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Package, IPX4, Offset, Surface Mount, Cable-to-Board, 5 Position, USB Connectors

View on TE.com >



Connectors > Audio & Video Connectors > USB Connectors



USB Adapter Type: A/B

USB Version: 2.0

Connector Profile: Micro

Connector & Housing Type: Receptacle

Number of Ports: 1

Features

Product Type Features

Integral Locking Latch	Without				
USB Adapter Type	A/B				
USB Version	2.0				
Connector & Housing Type	Receptacle				
Connector System	Cable-to-Board				
Connector & Contact Terminates To	Printed Circuit Board				
USB Connector Type	Micro USB 2.0 Type-AB				
Configuration Features					
Number of Ports	1				
Number of Positions	5				
Body Features					
Shell Plating Finish	Matte				
Shell Plating Material	Tin over Nickel				
Offset	.8 mm				

A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Package, IPX4, Offset, Surface Mount, Cable-to-Board, 5 Position, USB Connectors



Connector Profile	Micro
Contact Features	
Contact Mating Area Plating Material Thickness	.76 μm[29.52 μin]
Contact Mating Area Plating Material	Gold (Au)
Contact Current Rating (Max)	1.8 A
Termination Features	
Termination Post & Tail Length	.85 mm[.034 in]
Termination Method to PCB	Surface Mount
Mechanical Attachment	
Locking Feature	Without
PCB Mount Location	Тор
PCB Connector Seating	Offset
PCB Mount Retention Type	SMT Hold-Down
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	Thermoplastic
Housing Color	Black
Body Orientation	Right Angle
Centerline (Pitch)	.65 mm[.025 in]
Dimensions	
PCB Thickness (Recommended)	.8 – 1. mm[.031 – .039 in]
Usage Conditions	
Soldering Temperature (Max)	260 °C[500 °F]
Mating Cycles (Max)	10000
Operating Temperature Range	-30 – 85 °C[-22 – 185 °F]
Operation/Application	
Halogen Free	No
Assembly Process Feature	Without Pick and Place Cover
Circuit Application	Power & Signal
Industry Standards	
Industry Standard	USB 2.0
Moisture Sensitivity Level	1

A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Package, IPX4, Offset, Surface Mount, Cable-to-Board, 5 Position, USB Connectors



UL Flammability Rating	UL 94V-0
IP Rating	IPX4
Packaging Features	
Packaging Quantity	1000
Packaging Method	Package
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025
	(247) Candidate List Declared Against: JUNE
	2024 (241)
	Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Package, IPX4, Offset, Surface Mount, Cable-to-Board, 5 Position, USB Connectors





Customers Also Bought

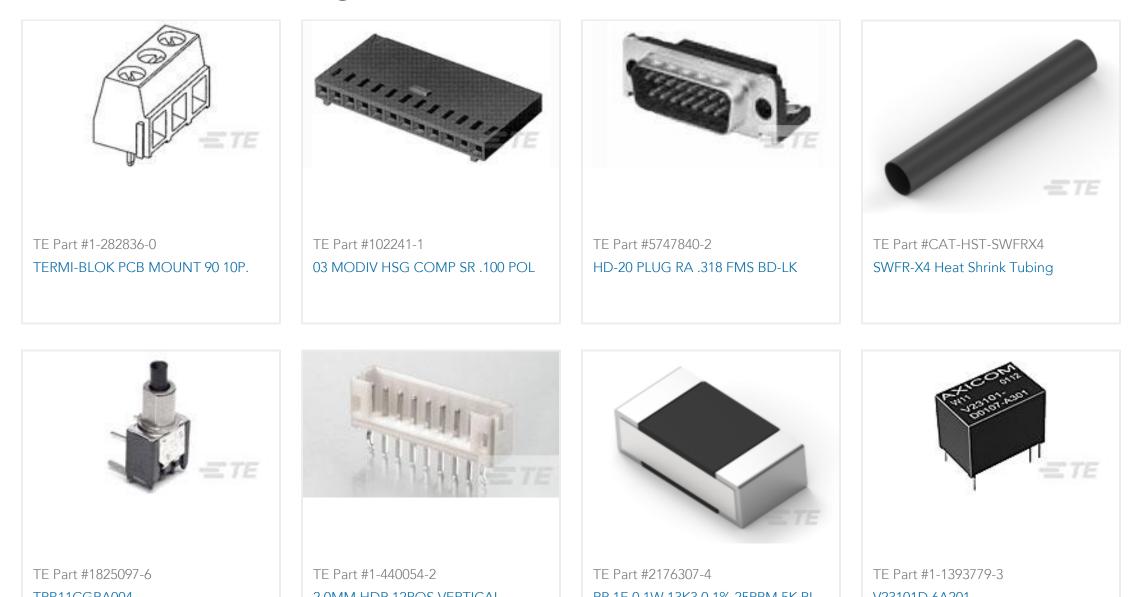

IFDITCGRA004	Z.UIVIIVI, TDR, IZFOS, VERTICAL	RE TE ULTVV TORO ULT/6 ZOFFIVI OR RE	VZSTUTD OAZUT	



Documents

Product Drawings

MICRO USB, TYPE A/B, SPLASHPROOF LOW MOQ

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1551629-3_B_c-1551629-3-b.2d_dxf.zip

A/B, 2.0, Micro Profile, Receptacle, 1 Port, Top, Right Angle, Package, IPX4, Offset, Surface Mount, Cable-to-Board, 5 Position, USB Connectors



English

Customer View Model ENG_CVM_CVM_1551629-3_B_c-1551629-3-b.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1551629-3_B_c-1551629-3-b.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Specification

English