




Connectors > Rectangular Connectors > Standard Rectangular Connectors

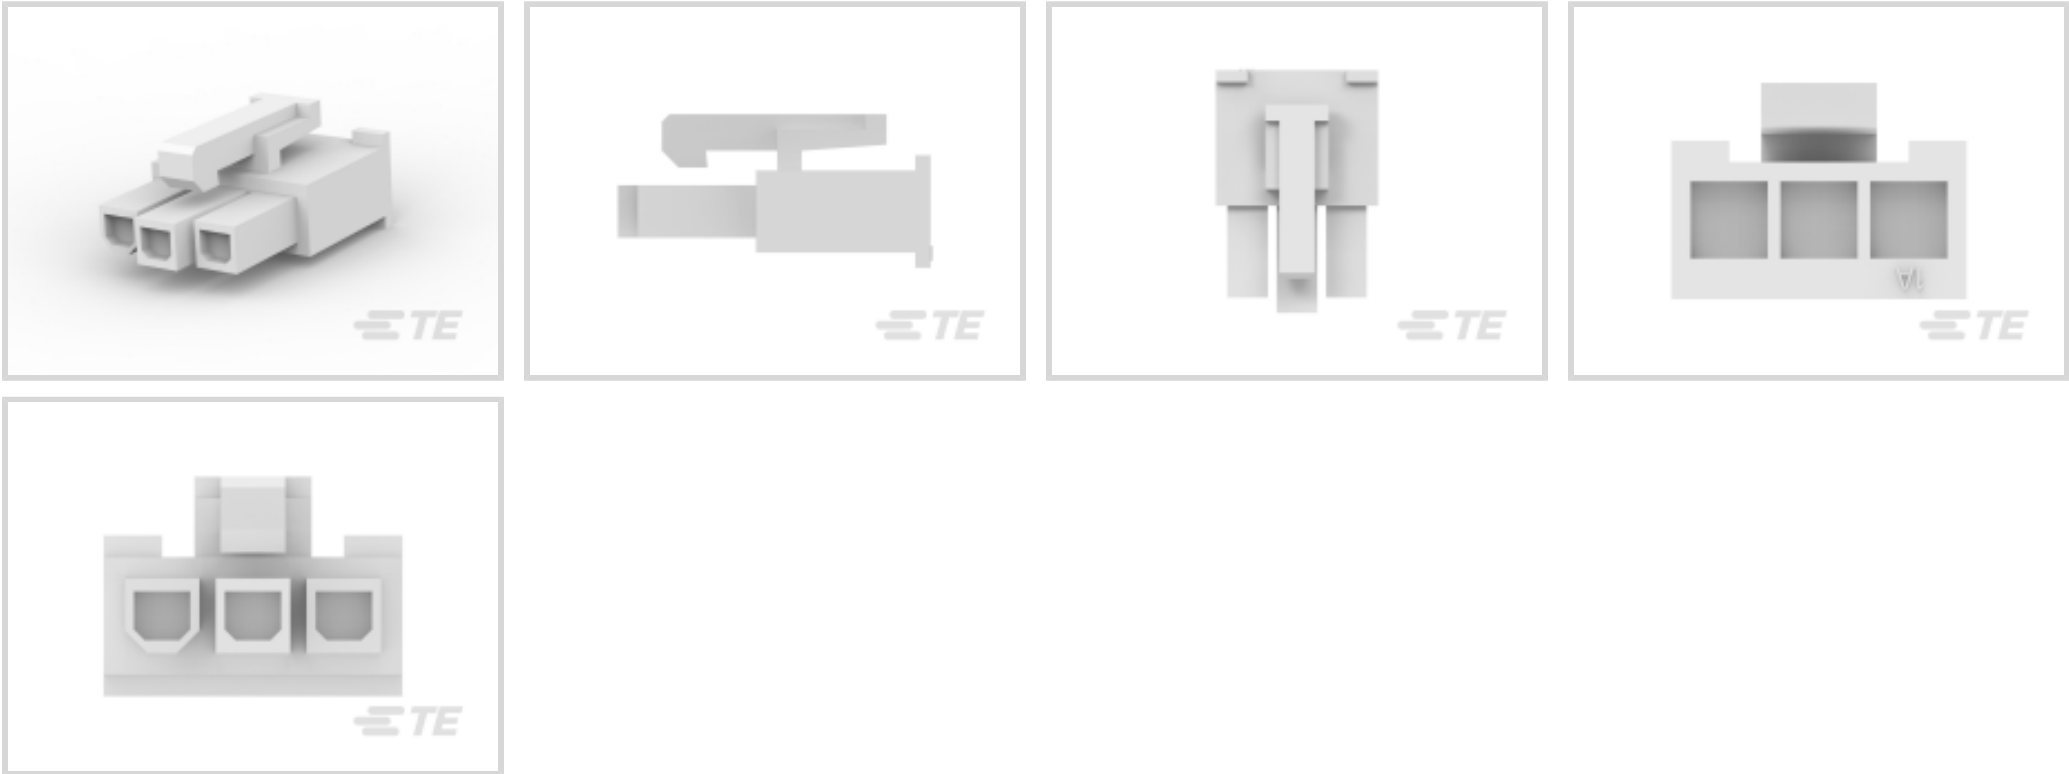

Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Termination Method to Wire & Cable: **Crimp**
Connector System: **Wire-to-Wire**
Contact Retention Within Housing: **Without**

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Insertion Force	15 Newton
Number of Positions	3
Number of Rows	1

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------



Contact Features

Contact Layout	Inline
Contact Type	Receptacle
Contact Retention Within Housing	Without

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	Nylon 66
Centerline (Pitch)	4.2 mm [.165 in]

Dimensions

Compatible Insulation Diameter Range	1.2 – 3.1 mm [.047 – .122 in]
Connector Width	20.6 mm [.811 in]
Connector Height	7.4 mm [.291 in]
Connector Length	13.8 mm [.543 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C [-40 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	208567
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	1000
--------------------	------



Packaging Method

Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1586103-3
3P PLUG VAL-U-LOK SR FH V2

TE Part # 2307185-3
3P PLUG SR VAL-U-LOK FH GW - TPA
VERSION

TE Part # 1586101-3
3P PLUG VAL-U-LOK SR PM V2

Customers Also Bought




TE Part #3-2232875-1
GIC6.0MM CONNECTOR PLUG
HOUSING 3POS



TE Part #CAT-H991-CH8172
AMPSEAL 16 Hybrid Lever Housings



TE Part #4-643820-2
12P MTA156 CONN ASSY 24AWG LF

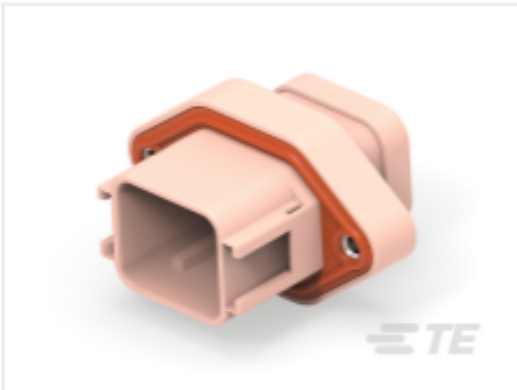

TE Part #DTV02-18PD
REC, 18P, BRN, N, FLANGE, D



TE Part #2138852-3
MOUNTING CLIP, 3MM PANEL,
AMPSEAL 16 HL



TE Part #1586102-3
3P PLUG VAL-U-LOK SR PM V0



TE Part #52264
TERMINAL R PG 6 5/16



TE Part #521207-1
POSI-LOK HSG.250-5 POS RAST5



TE Part #2-963449-1
JPT-GEH KOMPL 29P

Documents

Product Drawings
3P RCPT VAL-U-LOK SR V2
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1586105-3_C.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1586105-3_C.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1586105-3_C.3d_stp.zip
English
Customer View Model
ENG_CVM_1586105-3_B.3d_igs.zip
English



Customer View Model

[ENG_CVM_1586105-3_B.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1586105-3_B.2d_dxf.zip](#)

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

[VAL-U-LOK_SINGLE_ROW_HEADERS](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English

[UL Report](#)

English