




Connectors > Rectangular Connectors > Standard Rectangular Connectors

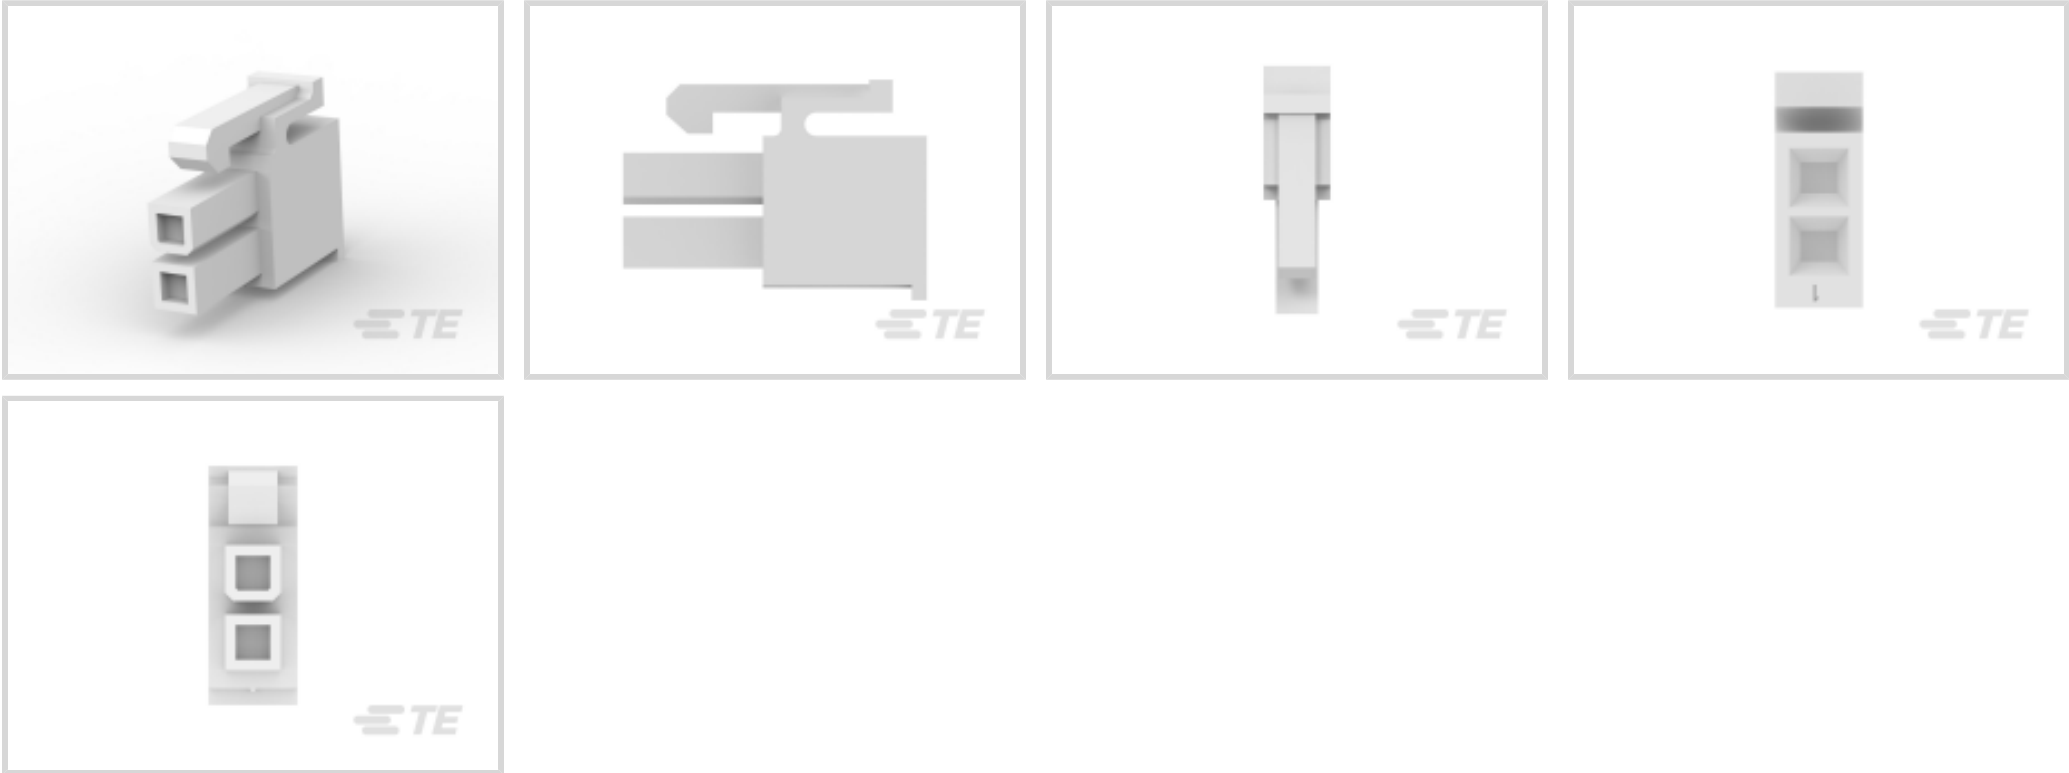

Connector Product Type: **Housing**
Connector & Housing Type: **Receptacle**
Termination Method to Wire & Cable: **Crimp**
Connector System: **Wire-to-Board, Wire-to-Wire**
Contact Retention Within Housing: **Without**

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Rows	2

Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

Body Features

Primary Product Color	White
-----------------------	-------

Contact Features

Contact Layout	Inline
----------------	--------



Contact Type	Receptacle
Contact Retention Within Housing	Without

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	Polyamide
Centerline (Pitch)	4.2 mm[.165 in]

Dimensions

Row-to-Row Spacing	4.2 mm[.165 in]
Compatible Insulation Diameter Range	1.2 – 3.1 mm[.047 – .122 in]
Connector Width	20 mm[.787 in]
Connector Height	10.8 mm[.425 in]
Connector Length	5.4 mm[.213 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	208567
Glow Wire Rating	GWT 750°C (Without Flame)
UL Flammability Rating	UL 94V-2

Packaging Features

Packaging Quantity	500
Packaging Method	Bag



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1586862-2
2P FH PLUG VAL-U-LOK FH GW



TE Part # 2825272-2
2P VERT HDR VAL-U-LOK HCS GW



TE Part # 1586861-2
2P PM PLUG VAL-U-LOK PM GW



TE Part # 2825274-2
2P VAL-U-LOK HCS VRTHDR W/PGS GW



TE Part # 2296207-2
2P PM PLUG VAL-U-LOK PM GWT/V0




TE Part # 2296206-2
2P FH PLUG VAL-U-LOK FH GWT/V0



TE Part # 2029097-2
2P RCPT VAL-U-LOK V2 BLUE

Customers Also Bought

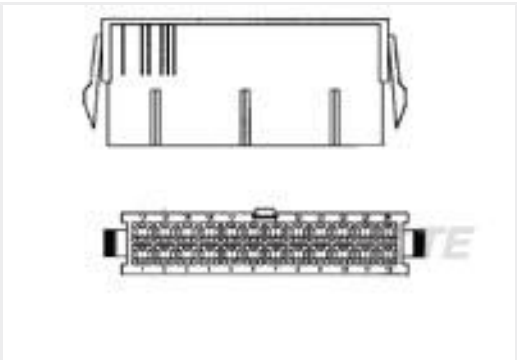

TE Part #1586861-2
2P PM PLUG VAL-U-LOK PM GW




TE Part #2178474-2
3POS UMNL CAP HSG V0 GW




TE Part #1586853-1
09P UMNL CAP HSG, GW



TE Part #5-1625890-3
2W SM M/OX 5% 47R

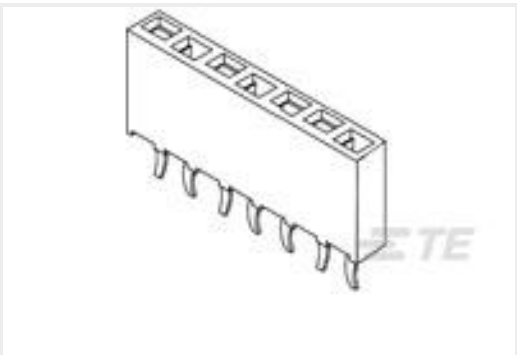


TE Part #215297-7
7P HV100 REC CON. TE, 7.0MM

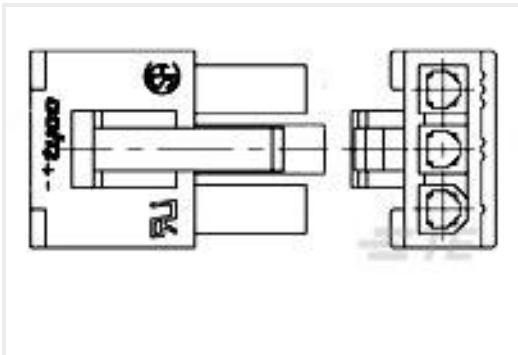

TE Part #2029112-3
3P RCPT SR VAL-U-LOK GW




TE Part #2178473-2
3POS UMNL PLUG HSG V0 GW

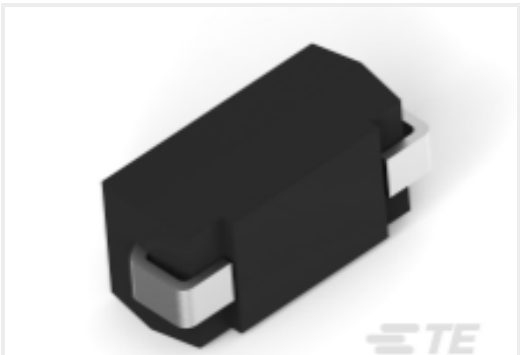

TE Part #2176323-9
SMV 2W 470K 5%



TE Part #9541-100C-S-C-3-S
PRESSURE I2C 1.5 PSIG SO16

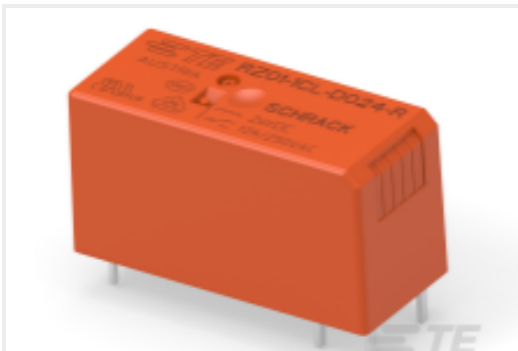

TE Part #8-2158000-4
RZ01-1CL-D024-R

Documents

Product Drawings
2P RCPT VAL-U-LOK GW
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1586765-2_D.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1586765-2_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1586765-2_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[VAL-U-LOK_GLOW_WIRE_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English

[UL Report](#)

English