




Terminals & Splices > Quick Disconnects

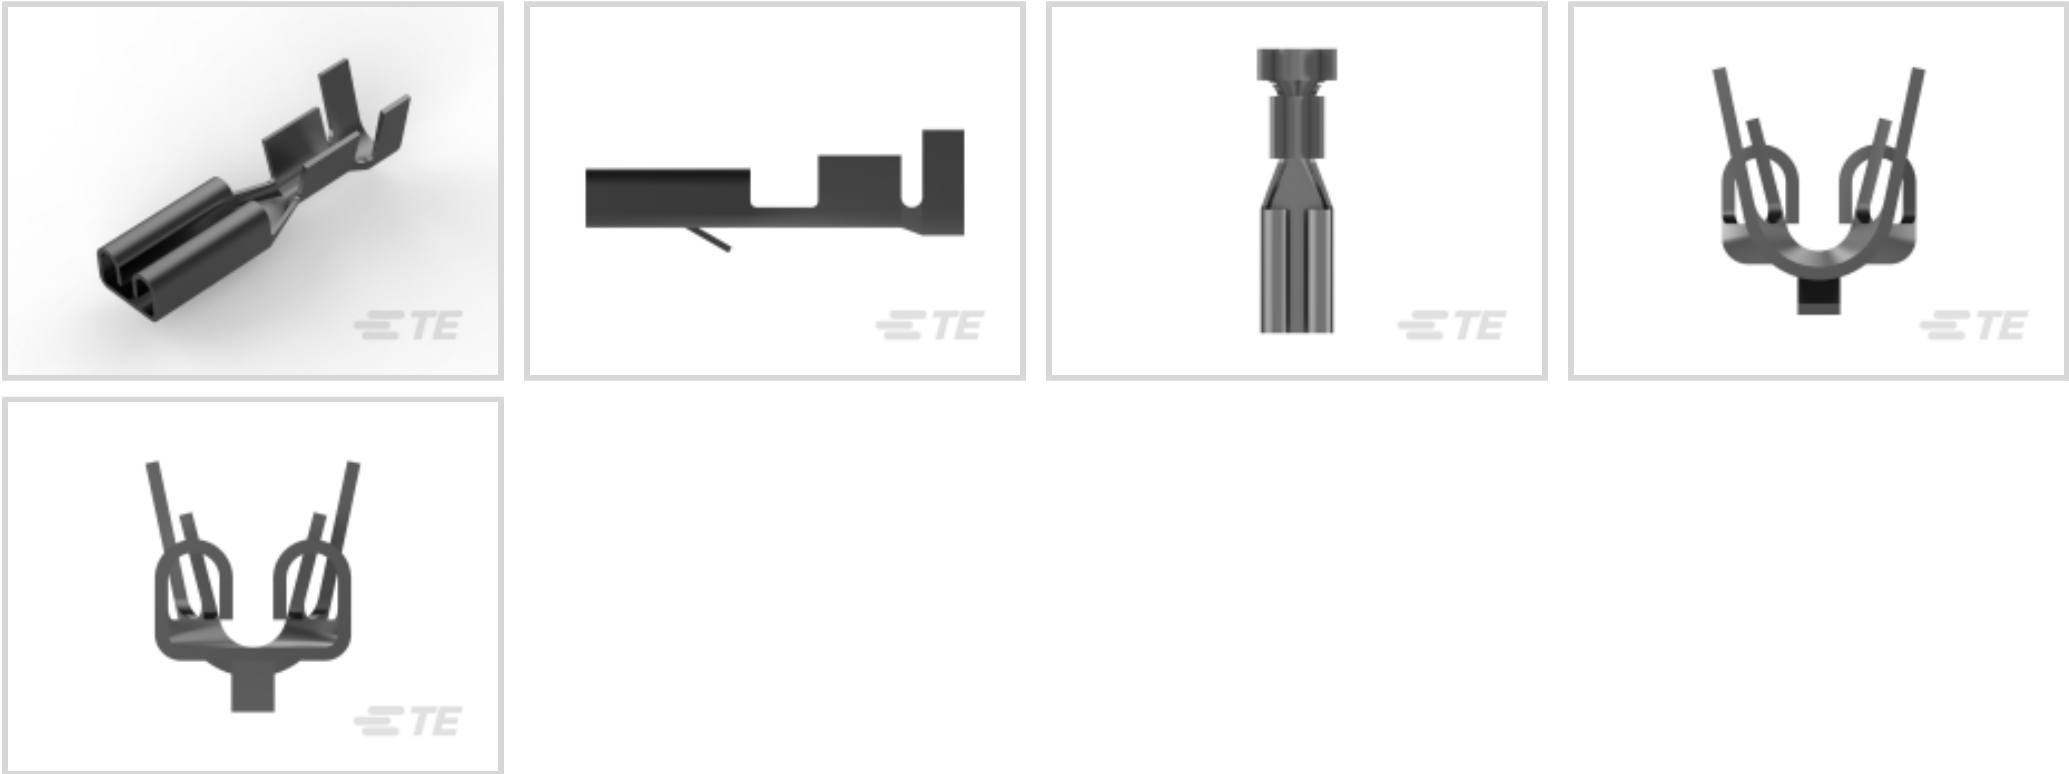

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.03 mm²**

Mating Tab Width: **2.8 mm [.11 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	.95 mm
Wire Insulation Support	With
Mating Retention Type	Locking Lance

Dimensions

Product Length	14 mm[.551 in]
Compatible Insulation Diameter Range	2.01 – 3 mm[.079 – .118 in]
Terminal Material Thickness	.25 mm[.01 in]
Wire Size	.51 – 1.03 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Packaging Features

Packaging Quantity	10000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

 TE Part # 2150017-1 OCEAN_2.0_Applicator-E-070F130F-REM	 TE Part # 2150017-2 OCEAN_2.0_Applicator-E-070F130F-REA	 KIT TE Part # 7-2150017-7 OCEAN_2.0_SPARE_PART_KIT-070F130F	 TE Part # 881799-2 FASTIN ON .110 REC
 TE Part # 881799-3 .110 SER. FASTIN-ON	 TE Part # 880634-5 FF 110 REC 0.5-1.0 MM2 0.25 X 12.3 PTPBR	 TE Part # 880634-3 .110 FASTIN-ON RECE	


Also in the Series | FASTIN-FASTON 110

 Automotive Housings(6)	 Automotive Terminals(5)	 Crimp Terminal Housings(34)	 Insertion & Extraction Tools(3)
 Quick Disconnects(78)			

Customers Also Bought

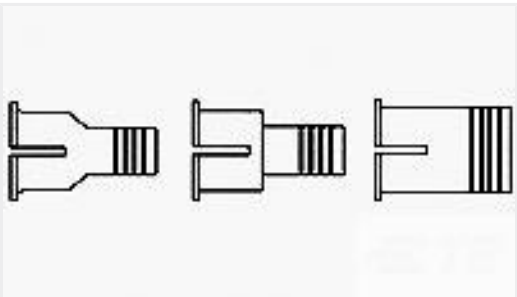

TE Part #7-745129-8
SHLDING FERRULE,PLTD,BULK PKG

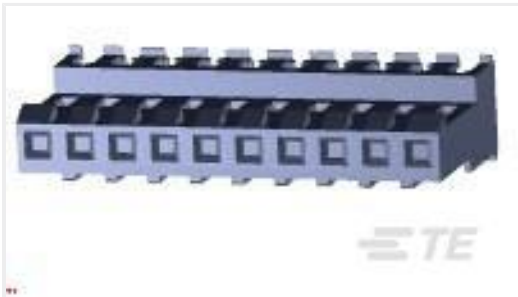


TE Part #4-640599-0
10P MTA156 CONN ASSY 18AWG ORA



TE Part #36880
TERMINAL,SOLIS SPD 16-14 8




TE Part #710028-3
XCT 70-10

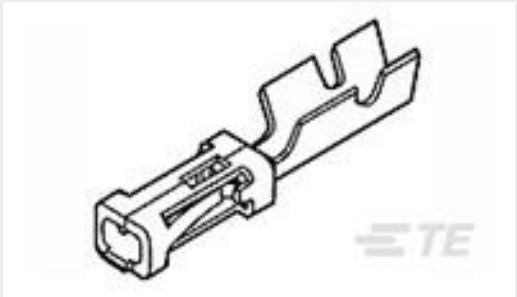


TE Part #167024-2
MOD-4 REC.CONT.SCP.




TE Part #2-2205132-4
CA MINI IO MINI IO TYPE II

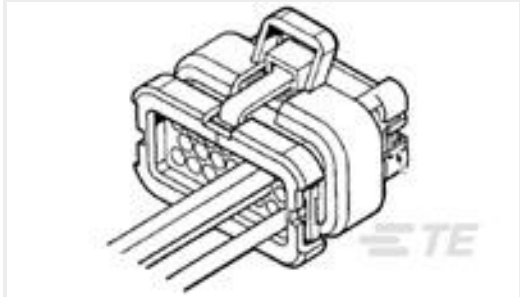


TE Part #776164-4
35POS,AMPSEAL,SOC HSG ASSY,SLD, COD 4

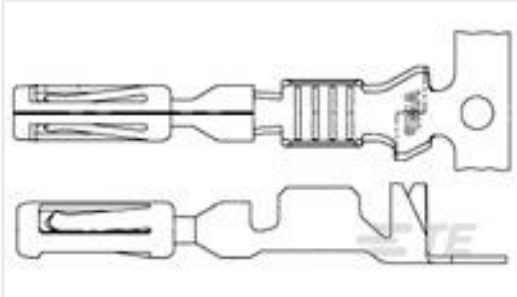

TE Part #770520-3
AMPSEAL,TERMINAL,GOLD PLATE, 16-20AWG WIR



TE Part #215965-3
SLIDING LOCK POST TINPLATED



TE Part #131098
HOUSING, BLOCK 4 P

Documents

Product Drawings

FF 110 REC 0.5-1.0MM2 PTPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_160684-2_W.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_160684-2_W.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_160684-2_W.3d_stp.zip

English

3D PDF

English



Customer View Model

[ENG_CVM_160684-2_W.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_160684-2_W.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_160684-2_W.2d_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Application Specification](#)

English