




Connectors > Connector Accessories > Connector Seals & Cavity Plugs

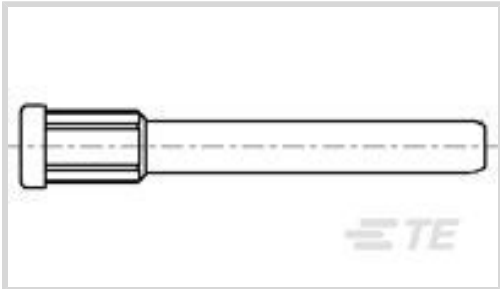

Operating Temperature Range: -40 – 120 °C [-40 – 248 °F]

Primary Product Color: **Yellow**

Operating Temperature (Max): 65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C [248 °F]

Features

Body Features

Primary Product Color	Yellow
-----------------------	--------

Usage Conditions

Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[248 °F]

Packaging Features

Packaging Method	Bag
Packaging Quantity	30000

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-T319-CH8172
TH/.025 CONNECTOR SYSTEM,
HOUSING



TE Part # CAT-AI5-EH
enetSEAL+ Ethernet Connector
Housings

Also in the Series | 0.64/025 Connector System



Automotive Connector Caps & Covers
(5)



Automotive Connector Locks &
Position Assurance(1)



Automotive Housings(117)




Automotive Terminals(17)



Connector Seals & Cavity Plugs(1)



Other Automotive Connector
Accessories(4)

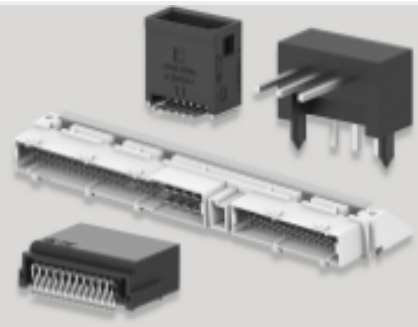

PCB Headers & Receptacles(148)



Rectangular Power Connectors(21)


Customers Also Bought



TE Part #1939152-1
PLUG HSG ASSY 60P 0.64/1.0 SEALED CONN



TE Part #1717677-1
CAP ASSY,12P,BRACKET REVERSE TYPE,ATAC C

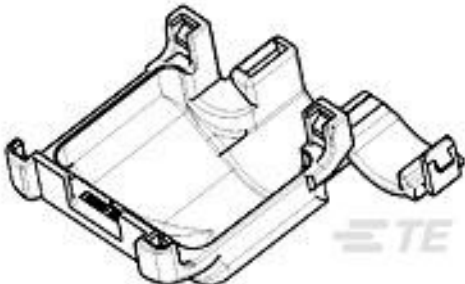


TE Part #1746089-1
025/040 44POS COVER V




TE Part #1326979-1
BACK SHELL, 3 WIRE, AMPSEAL 16



TE Part #CAT-AI5-EH
enetSEAL+ Ethernet Connector Housings

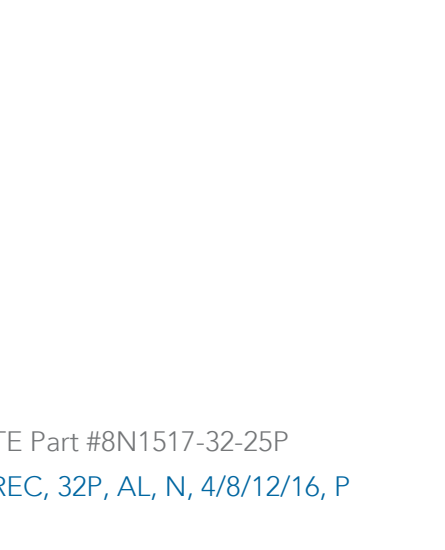

TE Part #8N1517-32-25P
REC, 32P, AL, N, 4/8/12/16, P

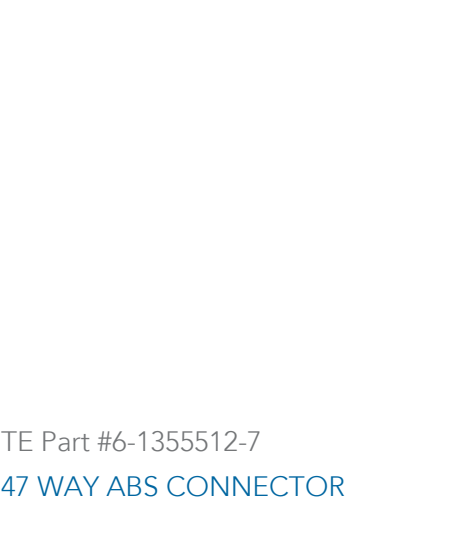

TE Part #6-1355512-7
47 WAY ABS CONNECTOR



TE Part #1318332-1
.040 SEALED REC CONT



TE Part #7G7918-12
SEAL PLUG, SIZE 12, YEL

Documents

Product Drawings
025/040 CAVITY PLUG

Japanese

CAD Files
Customer View Model
ENG_CVM_1612108-4_O3.3d_igs.zip

English

Customer View Model
ENG_CVM_1612108-4_O3.3d_stp.zip

English

Customer View Model
ENG_CVM_1612108-4_O3.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Crimping CLEAN BODY 025/040 Receptacle Contact

English

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English