DS11-1000 - ACTIVE

CII | Kilovac DP11 TE Internal #: 1617069-1 DC Input Solid State Relay, 1 Form A (NO), 3.8 – 32 VDC Input, 60 VDC Output, 2 A Contact Rating, DC Output, Board Mount, Kilovac DP11

View on TE.com >

Relays & Contactors > Solid State Relays



Input Current Type: DC Contact Arrangement: 1 Form A (NO) Input Voltage: 3.8 – 32 VDC Output Voltage Rating: 60 VDC Contact Current Rating: 2 A

Features

Configuration Features

Contact Arrangement



1 Form A (NO)

Electrical Characteristics

| Insulation Initial Dielectric Between Contacts & Coil | 1000 Vrms | |
|---|---------------------|--|
| Contact Voltage Rating | 60 VDC | |
| Input Voltage | 3.8 – 32 VDC | |
| Output Voltage Rating | 60 VDC | |
| Contact Current Rating | 2 A | |
| Body Features | | |
| Device Package Style | DIP | |
| Enclosure Type | Hermetically Sealed | |
| Termination Features | | |
| Relay Connection Type | PCB Termination | |
| Terminal Configuration | Solder Pins | |
| Mechanical Attachment | | |
| Product Mount Type | Board Mount | |
| Dimensions | | |
| Product Length | 22.6 mm[.89 in] | |

DS11-1000

DC Input Solid State Relay, 1 Form A (NO), 3.8 – 32 VDC Input, 60 VDC Output, 2 A Contact Rating, DC Output, Board Mount, Kilovac DP11



| Product Width | 13.46 mm[.529 in] |
|---|---|
| Product Height | 4.82 mm[.19 in] |
| Usage Conditions | |
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
| Operation/Application | |
| Shock Resistance | 50G's, 11ms |
| Input Current Type | DC |
| Output Current Type | DC |
| Packaging Features | |
| Packaging Method | Tray/Box |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 |

(247) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

L For support call+1 800 522 6752

DS11-1000

DC Input Solid State Relay, 1 Form A (NO), 3.8 – 32 VDC Input, 60 VDC Output, 2 A Contact Rating, DC Output, Board Mount, Kilovac DP11






Also in the Series | Kilovac DP11



Customers Also Bought

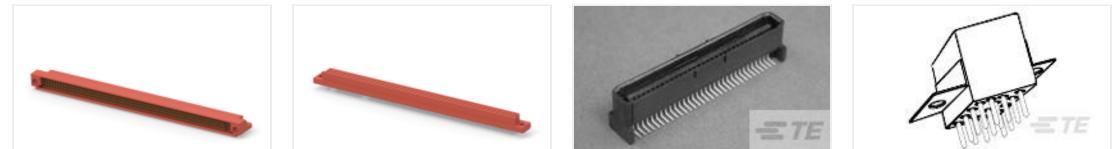

| -= TE | = <i>TE</i> | | |
|---|---|---|--|
| TE Part #1996168-1 3 ROW BOX P/H R/A CONT REMOVED | TE Part #1996169-2 3 ROW BOX REC,100CL,CONT REMOVED | TE Part #120527-1 1FHP,64,30A/P,S,N,S10,12,13,15 | TE Part #1617754-3 FCA-410-1522M=M83536/15-022M |



Documents

Product Drawings DS11-1000 = DS11 SOLID STATE D

English

Datasheets & Catalog Pages 5-1773450-5_sec10_DS11

J-177 J-JU-J_JECTC

English

DS11-1000

DC Input Solid State Relay, 1 Form A (NO), 3.8 – 32 VDC Input, 60 VDC Output, 2 A Contact Rating, DC Output, Board Mount, Kilovac DP11

