




Terminals & Splices > Quick Disconnects

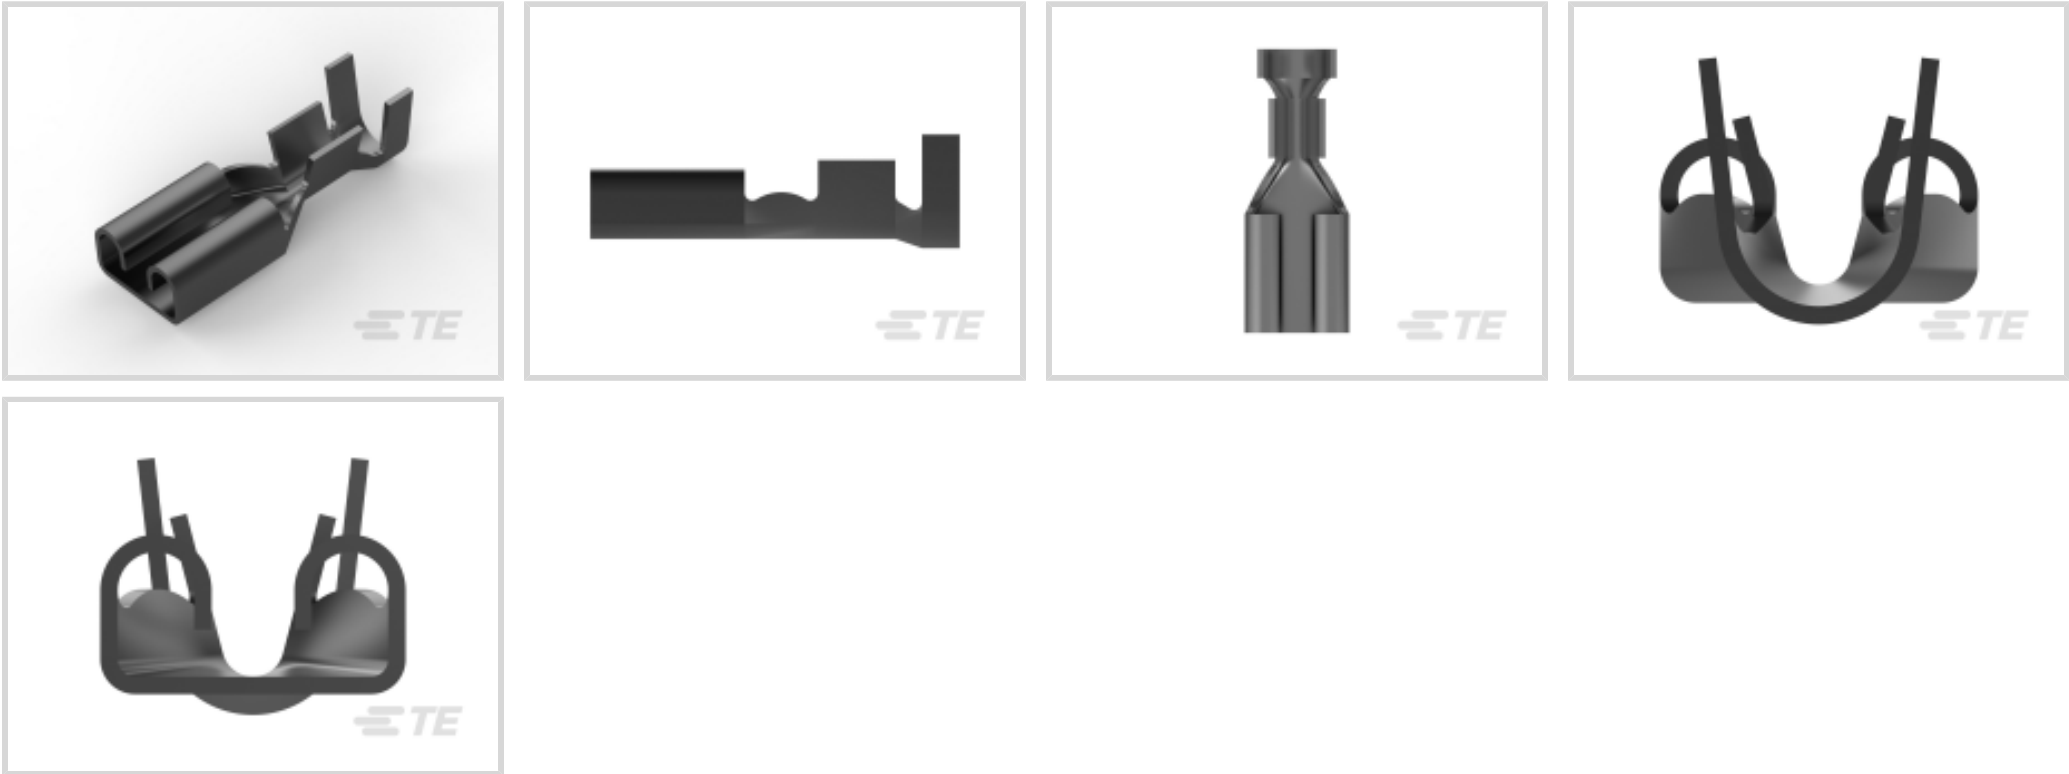

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.31 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	16.6 mm[.653 in]
Compatible Insulation Diameter Range	2.29 – 3.3 mm[.09 – .13 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.51 – 1.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	CSA, UL
---	---------

Packaging Features

Packaging Quantity	9000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

REPRESENTATION ONLY

TE Part # 755336-1
DAHT FASTON 22-14 ASSY

TE Part # 2150007-1
OCEAN_2.0_Applicator-E-090F140F-REM

TE Part # 2232975-1
187 FASTON,REC.,20-16 AWG,TPBR

TE Part # 2825630-1
STD MAG-MATE .187 POKE-IN TAB

TE Part # 2178549-2
187 FASTON,REC.,18-14 AWG,TPBR

TE Part # 2825631-1
STD MAG-MATE .187 POKE-IN TAB

TE Part # 2150007-2
OCEAN_2.0_Applicator-E-090F140F-REA

KIT

REPRESENTATION ONLY

TE Part # 7-2150007-7
OCEAN_2.0_SPARE_PART_KIT-090F140F

TE Part # 2825632-1
STD MAG-MATE .187 POKE-IN TAB

Also in the Series | **FASTON 187**



Crimp Terminal Housings(40)



Insertion & Extraction Tools(1)



Insulation Boots & Sleeves(1)



Joints & Splices(1)



PCB Terminals(42)



Quick Disconnects(205)



Splices(1)

Customers Also Bought




TE Part #1-2291193-3
SMARTSEAL TERMINAL



TE Part #2305881-1
CVTY PLUG,090 SERIES,CVTY DIA,1, GRY



TE Part #41802
250 FASTON FLAG REC 18-12 AWG TPBR

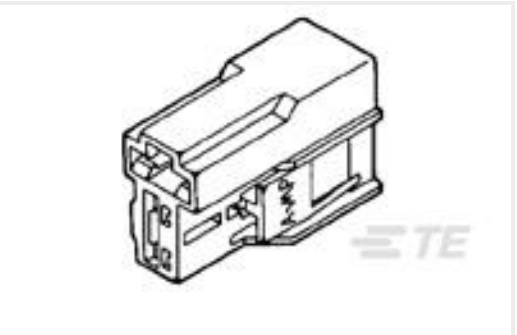


TE Part #172434-1
POSITIVE LOCK 250 (6.3 MM) HOUSING



TE Part #42563-2
250 FASTON FLAG REC 12-10 AWG TPBR



TE Part #2236793-3
SMARTSEAL TERMINAL

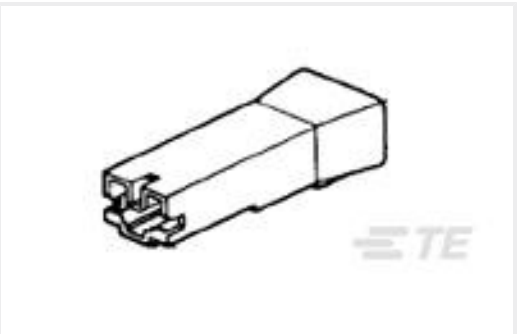

TE Part #177627-1
PL .250 (6.3 MM) HOUSING RECEPTACLE



TE Part #900319-1
PL 312 FLAG REC 20-18AWG 0.32X24. 9 PTPBR



TE Part #2290490-1
16POS,1.0 SERIES,REC HSG ASSY,SLD



TE Part #170140-2
187 FASTON,FLAG,REC.,16-20 AWG, TPBR

Documents



Product Drawings

187 FASTON,REC.,20-16 AWG,TPBR

English

CAD Files

Customer View Model

ENG_CVM_CVM_170037-2_AD.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170037-2_AD.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170037-2_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Agency Approvals

UL Report

English