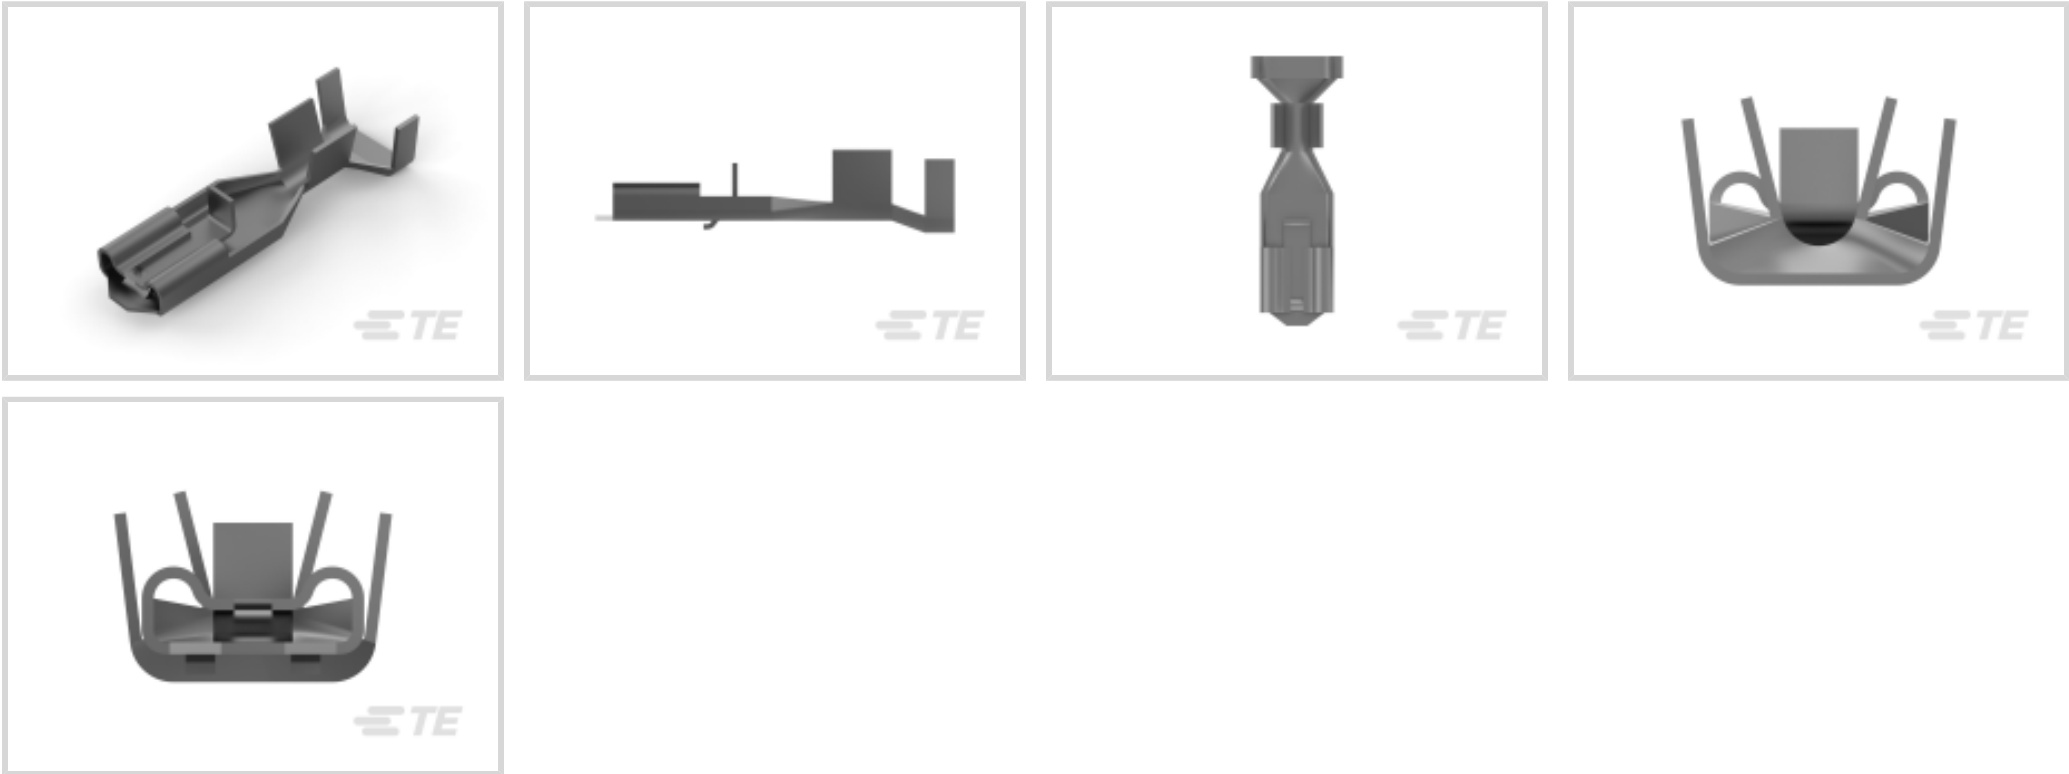




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

Features

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

--	--



Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	2.1 – 3.6 mm[.082 – .141 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

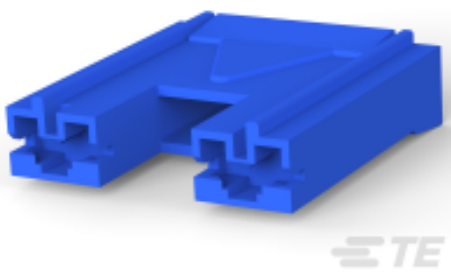
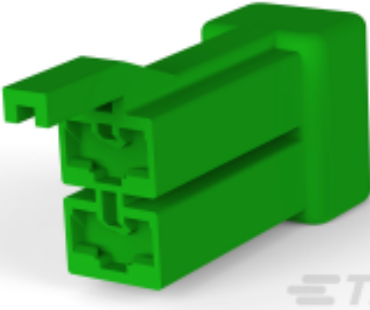
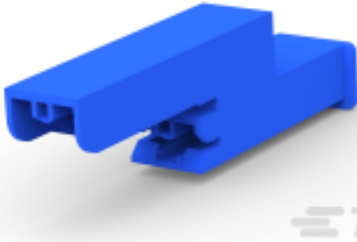
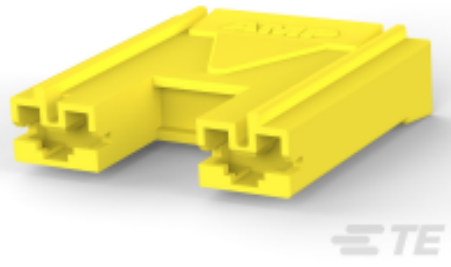
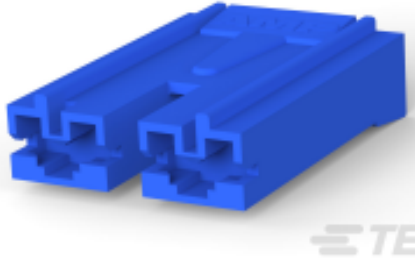

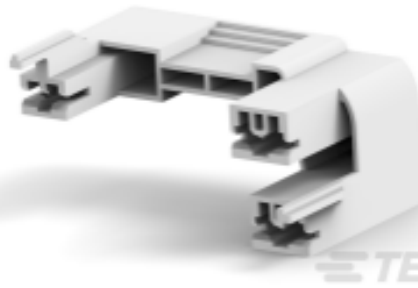
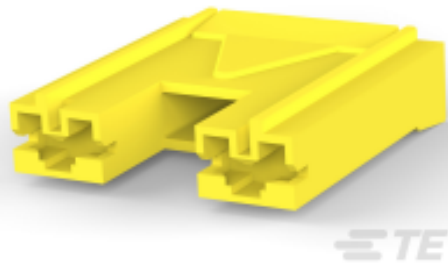
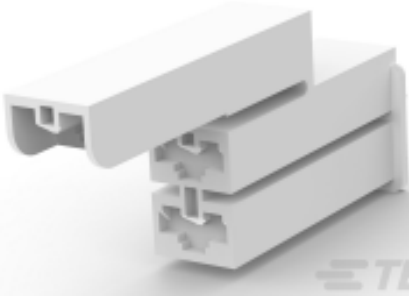
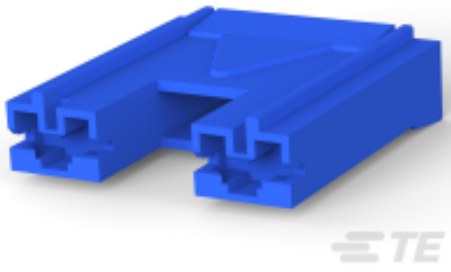
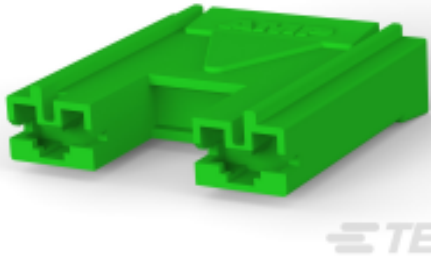
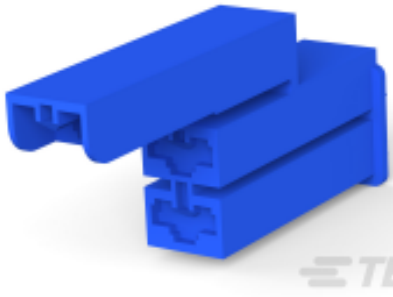

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 2-176498-6 187 HSG. PL MKII REC. 15mm 2P BLUE	 TE Part # 1-1318920-3 POSITIVE LOCK 187 HOUSING REC GREEN	 TE Part # 2150054-2 OCEAN_2.0_Applicator-E-120F232O-REA	 TE Part # 1-174712-6 PL MK2 2P 187 HOUSING RECEPTACLE BLUE
 TE Part # 353148-4 POSITIVE LOCK 187 HOUSING RECEPTACLE	 TE Part # 179720-6 PL 187 (4.8 MM) HOUSING RECEPTACLE	 TE Part # 1-174712-1 187 HSG. PL MKII REC. 6.65mm 2P NAT	 TE Part # 1-175578-1 PL MK2 2P 187 HOUSING REC NAT 6 /6 NYLON
 TE Part # 1969870-1 3P, 250 AND 187 SRS, POSI-LOCK MARK II	 TE Part # 176498-4 POSITIVE LOCK 187 (4.8 MM) HOUSING	 TE Part # 172075-1 POSITIVE LOCK 187 HOUSING RECEPTACLE	 TE Part # 1-368602-1 187 P.LOCK 1P TAB GUIDE NAT
 TE Part # 176498-6 PL MKII 187 REC HSG 2P NYLON BLUE	 TE Part # 353148-5 POSITIVE LOCK 187 HOUSING RECEPTACLE	 TE Part # 1-172075-6 187 POSITIVE MK-2 REC HSG 3P	 TE Part # 1-172210-7 6 POS PL MK-2 187 HOUSING RECEPTACLE



TE Part # 1-173150-1
PL 187 HOUSING REC NATURAL 6/6
NYLON

TE Part # 1-174587-4
PL MK2 2P 187 HOUSING REC
YELLOW

TE Part # 170324-6
POSITIVE LOCK 187 REC 24-20AWG
0.3 PTPBR

TE Part # 174587-1
PL 187 (4.8 MM) HOUSING
RECEPTACLE

Also in the Series | Positive Lock 187

Crimp Terminal Housings(76)

Insertion & Extraction Tools(2)

Insulation Boots & Sleeves(7)

Quick Disconnects(57)

Also in the Series | Mark II

Automotive Connector Locks &
Position Assurance(1)

Automotive Housings(6)

Automotive Terminals(3)

Connector Seals & Cavity Plugs(1)

Crimp Terminal Housings(76)

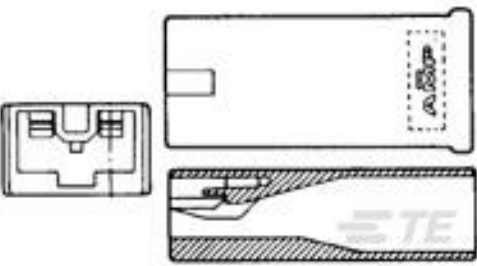
Insertion & Extraction Tools(2)

Quick Disconnects(57)


Customers Also Bought



TE Part #1743729-1
FG TERMINAL



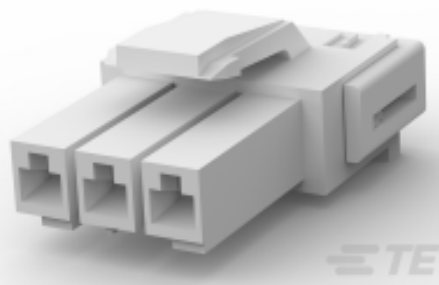
TE Part #179970-2
PL EXII 250 REC HSG 1P NYLON RED



TE Part #5-177899-1
POWER DBL LOCK PLUG HSG 3P (GWT)



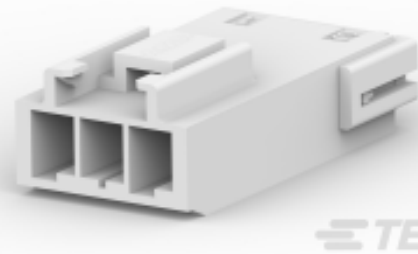TE Part #2-1743068-1
187 HSG. PL MKII REC. 5mm 3P NAT (GWT)



TE Part #5-179464-1
POWER DBL LOCK CAP HSG F/H 3P (GWT)



TE Part #368572-6
PDL 3P CAP 3.9% F/H(GWT) BLU



TE Part #1217039-1
TIMER CONNECTOR GEN 3 18-14 POST-TPBR



TE Part #170325-1
187 PL MKII REC. 20-16AWG PTBR



TE Part #2-1743217-1
GAS VALVE 3P HSG GWT



TE Part #2-1743216-1
GAS VALVE 2P HSG GWT

Documents

Product Drawings

187 PL MKII REC. 18-14AWG PTBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170326-1_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170326-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170326-1_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



Positive Lock Receptacles

English

1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

AMP* POSITIVE LOCK CONNECTOR

English

Agency Approvals

Agency Approval Document

English