




Positive Lock | Mark II, Positive Lock 187

TE Internal #: 170326-5

Quick Disconnect Receptacle, 18 – 14 AWG, .82 – 2.08 mm² Wire, 4.75 mm [.187 in] Tab Width, Straight, Phosphor Bronze, Positive Lock 187

[View on TE.com >](#)

Terminals & Splices > Quick Disconnects

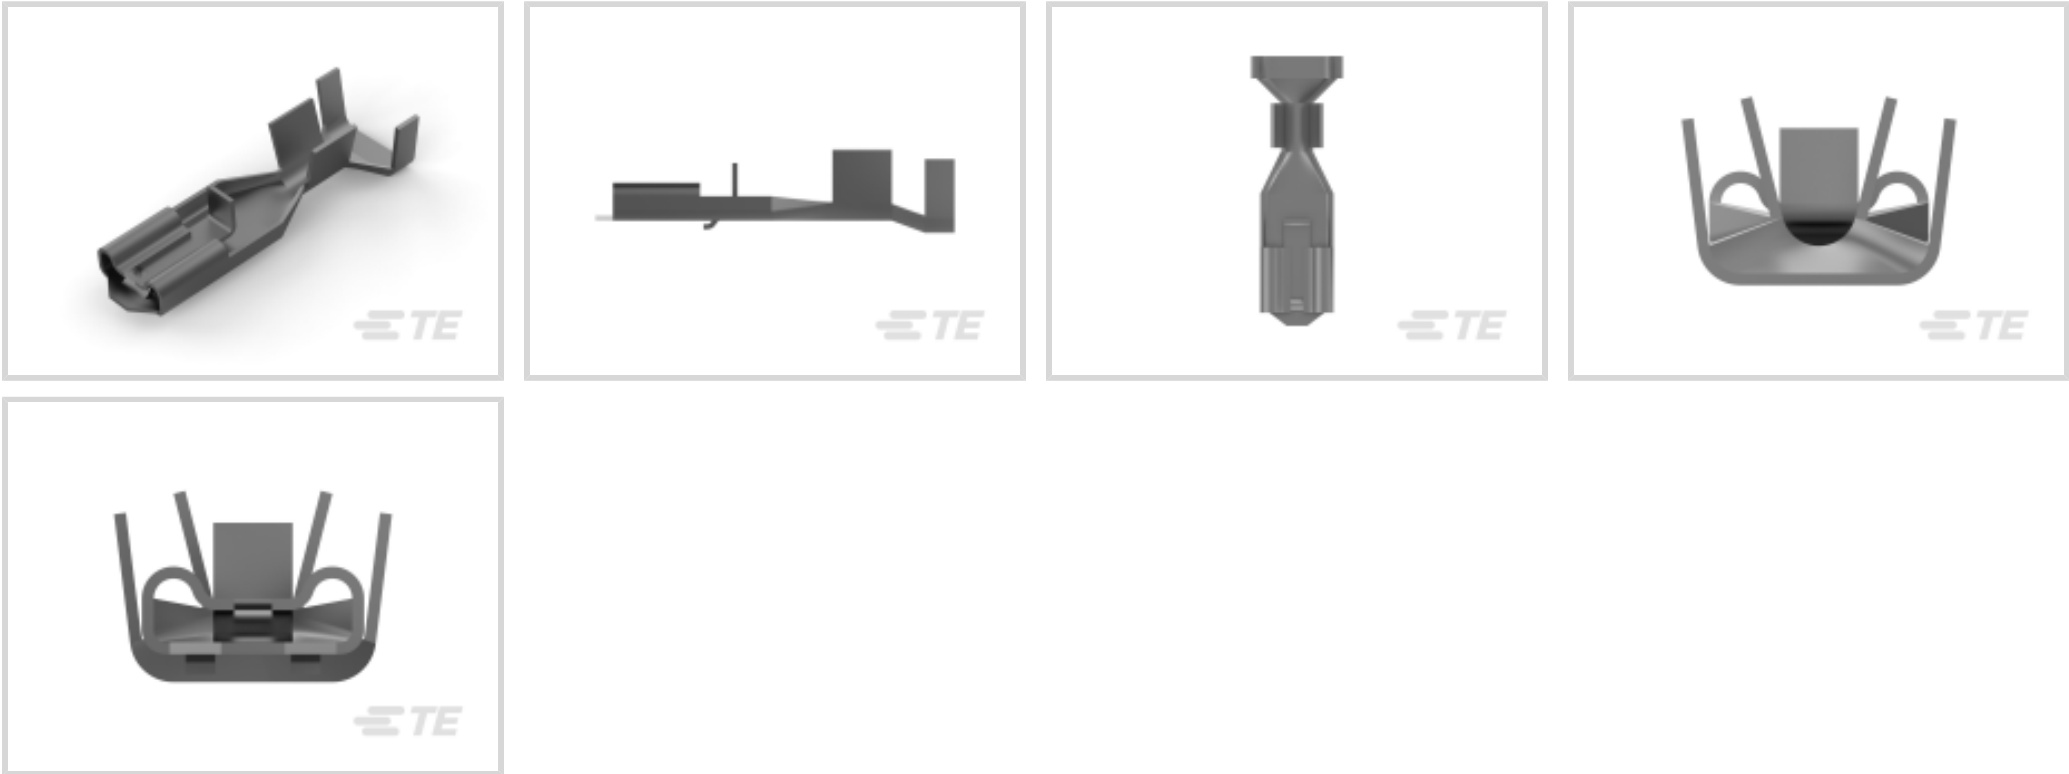

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.51 mm [.02 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	2.1 – 3.6 mm[.082 – .141 in]
Terminal Material Thickness	.3 mm[.012 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	5000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1-172075-6 187 POSITIVE MK-2 REC HSG 3P	TE Part # 1-172210-7 6 POS PL MK-2 187 HOUSING RECEPTACLE	TE Part # 1-173150-1 PL 187 HOUSING REC NATURAL 6/6 NYLON	TE Part # 1-174587-4 PL MK2 2P 187 HOUSING REC YELLOW
TE Part # 170324-6 POSITIVE LOCK 187 REC 24-20AWG 0.3 PTPBR	TE Part # 174587-1 PL 187 (4.8 MM) HOUSING RECEPTACLE	TE Part # 7-2150054-7 OCEAN_2.0_SPARE_PART_KIT-120F232O	TE Part # 172074-6 POSIT.LOCK HSG.01P
TE Part # 1-172210-1 187 HSG. PL MKII REC. 6mm 2P NAT	TE Part # 174712-1 PL 187 (4.8 MM) HOUSING RECEPTACLE	TE Part # 172210-1 POSITIVE LOCK 250 HOUSING RECEPTACLE	TE Part # 172074-1 187 HSG. PLMKII REC. NAT
TE Part # 172075-4 POSITIVE LOCK 187 HOUSING RECEPTACLE	TE Part # 172210-4 PL 187 REC HSG 2P NYLON YELLOW	TE Part # 173974-4 PL 187 (4.8 MM) HOUSING RECEPTACLE	TE Part # 179720-2 PL 187 (4.8 MM) HOUSING RECEPTACLE



TE Part # 1-172210-4
3P PL MK-2 187(4.8 MM) HOUSING REC

TE Part # 179720-1
187 HSG. PL MKII REC. 10mm 2P NAT

TE Part # 172210-2
2P POSITIVE LOCK REC HSG

TE Part # 1-172075-1
3 POS PL 187(4.8 MM) HOUSING NATURAL

Also in the Series | Positive Lock 187

Crimp Terminal Housings(76)

Insertion & Extraction Tools(2)

Insulation Boots & Sleeves(7)

Quick Disconnects(57)

Also in the Series | Mark II

Automotive Connector Locks & Position Assurance(1)

Automotive Housings(6)

Automotive Terminals(3)

Connector Seals & Cavity Plugs(1)

Crimp Terminal Housings(76)

Insertion & Extraction Tools(2)

Quick Disconnects(57)

Customers Also Bought



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_170326-5_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_170326-5_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_170326-5_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

AMP* POSITIVE LOCK CONNECTOR

English

Agency Approvals

UL Report

English

170326-5

Quick Disconnect Receptacle, 18 – 14 AWG, .82 – 2.08 mm² Wire, 4.75 mm [.187 in]
Tab Width, Straight, Phosphor Bronze, Positive Lock 187

