




Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

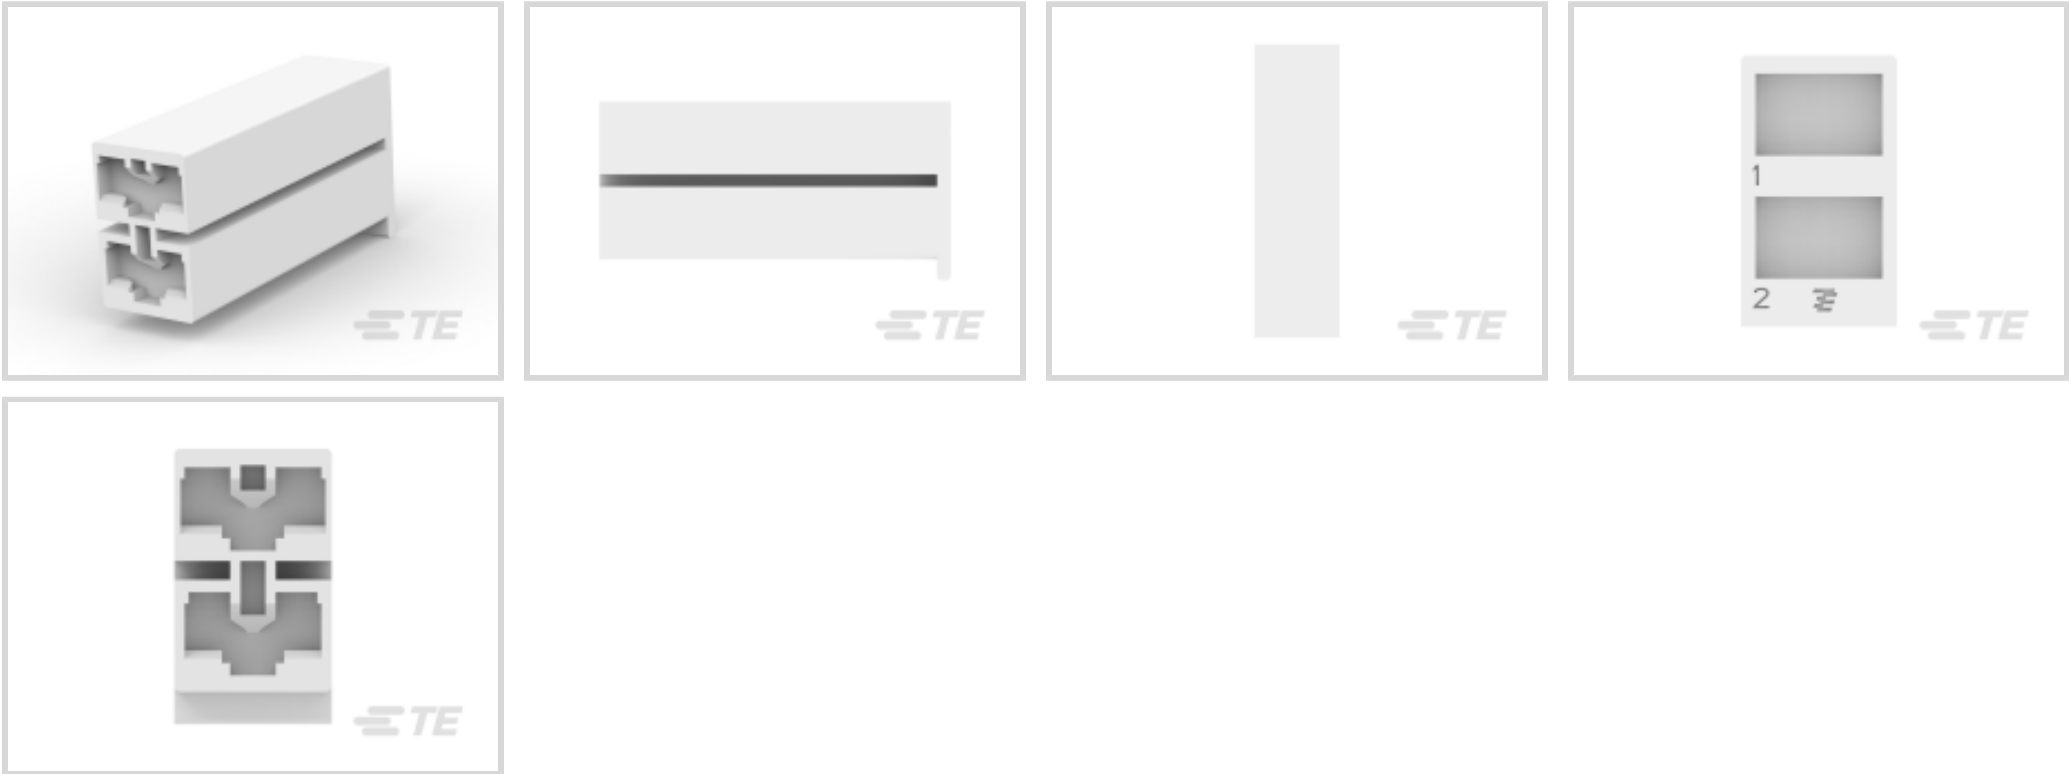

Terminal Type: **Receptacle**

Connector & Housing Type: **Receptacle**

Number of Positions: **2**

Terminal Orientation: **Straight**

UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Sealable	No
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	2
---------------------	---

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

--



Mating Alignment Type	Polarization
Mating Retention Type	Latch
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon
Centerline (Pitch)	6 mm[.236 in]

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	1000
--------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 170330-1 PL MKII 187 REC 24-20AWG PTBR LP	 TE Part # 170331-1 PL MKII 187 REC 20-16AWG PTBR LP	 TE Part # 170326-1 187 PL MKII REC. 18-14AWG PTBR	 TE Part # 170324-1 187 PL MKII REC. 24-20AWG PTBR
 TE Part # 170324-2 PL 187 RECEPTACLE 24-20 AWG 0.3 NPCU	 TE Part # 170325-5 187 PL MKII REC. 20-16AWG PTBR	 TE Part # 170325-1 187 PL MKII REC. 20-16AWG PTBR	 TE Part # 170332-1 PL 187 RECEPTACLE 18-14 AWG PTPBR
 TE Part # 170330-2 PL 187 RECEPTACLE 24-20 AWG NPPHBZ	 TE Part # 170326-5 187 PL MKII REC. 18-14AWG PTPB		


Also in the Series | Positive Lock 250

 Automotive Terminals(1)	 Crimp Terminal Housings(177)	 Insertion & Extraction Tools(3)	 Insulation Boots & Sleeves(5)
-----------------------------	----------------------------------	-------------------------------------	-----------------------------------



[Quick Disconnects\(173\)](#)

Customers Also Bought

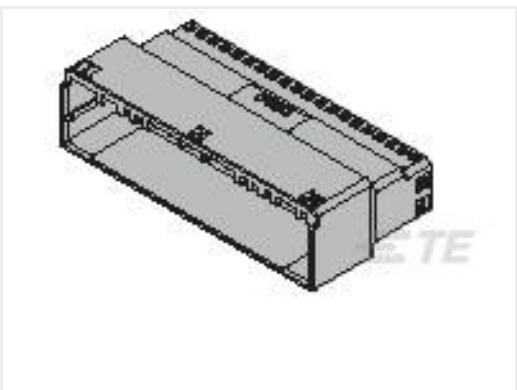

TE Part #1-1903127-3
[DYNAMIC 1100D TAB HSG 26P F/H](#)



TE Part #CAT-G7534-P729A
[Glow Wire GRACE INERTIA Plug](#)




TE Part #206071-1
[SZ 22, SOCKET, NON-MAG](#)




TE Part #1-171706-1
[FASTON 250 INS POD NYLON NAT](#)



TE Part #2-32053-1
[PIDG SPD 22-16 COMM 22-18MIL 8](#)

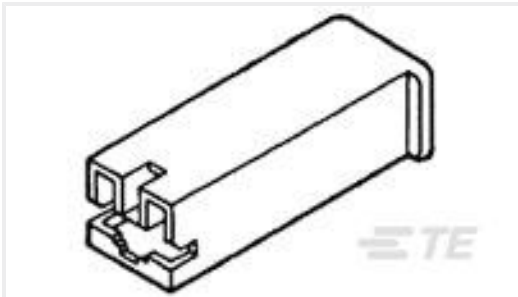

TE Part #2-172076-1
[250 HSG. PL MKII REC. NAT](#)

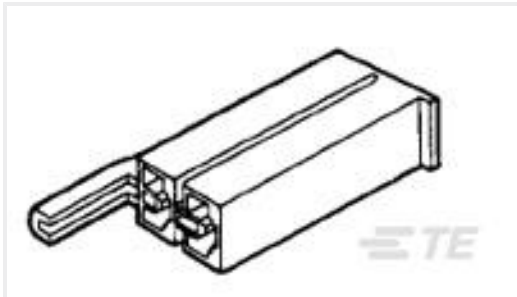

TE Part #1-174587-7
[PL MK2 2POS 187 HOUSING RECEPTACLE RED](#)



TE Part #5052882016
[RNF-100-3/64-9-STK](#)



TE Part #85092-1
[PL 187 HOUSING 2P REC NYLON66 NATURAL](#)

Documents

Product Drawings

[POSITIVE LOCK 250 HOUSING RECEPTACLE](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_172210-1_R.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_172210-1_R.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_172210-1_R.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Positive Lock Receptacles](#)

English

Agency Approvals

[UL Report](#)

English