



Positive Lock | Positive Lock 250

TE Internal #: 172765-1

Quick Disconnect Receptacle, 14 – 12 AWG, 2.1 – 3.31 mm² Wire,
6.35 mm [.25 in] Tab Width, Flag, Brass, Pre-Tin Plating, Strip/Reel,
Positive Lock 250

[View on TE.com >](#)

Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2.1 – 3.31 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Pre-Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	.7 – 10.2 kgf

Dimensions

Product Length	21.6 mm[.85 in]
Compatible Insulation Diameter Range	2.8 – 5.2 mm[.11 – .204 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	2.1 – 3.31 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	2000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

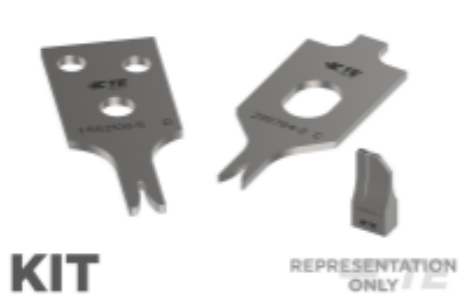

KIT

TE Part # 7-2150940-7
OCEAN_2.0_SPARE_PART_KIT-130F219O

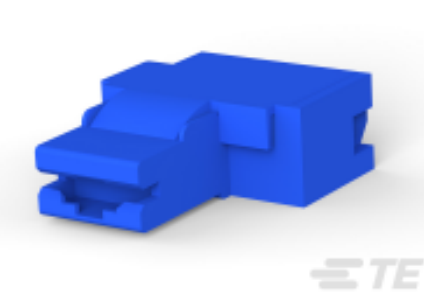


TE Part # 1-172469-2
PL 250 (6.3 MM) HOUSING BLUE 6/6 NYLON



TE Part # 341299-2
PL 250 REC TERMINAL 20-15 AWG PTPB




TE Part # 2150940-2
OCEAN_2.0_Applicator-E-130F219O-SEA

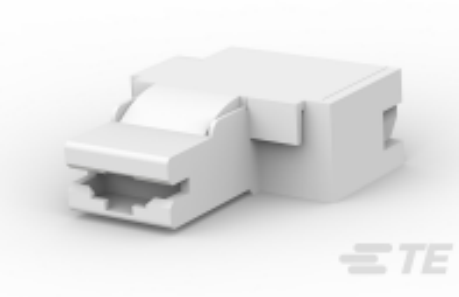


TE Part # 1-172469-1
PL 250 HOUSING NATURAL 6/6 NYLON

Also in the Series | Positive Lock 250

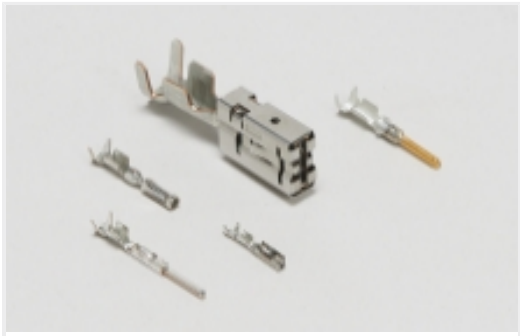

Automotive Terminals(1)

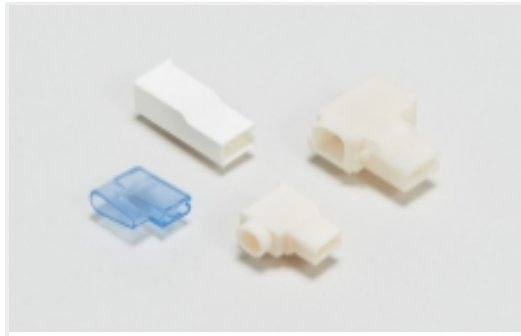

Crimp Terminal Housings(177)



Insertion & Extraction Tools(3)



Insulation Boots & Sleeves(5)



[Quick Disconnects\(173\)](#)


Customers Also Bought



TE Part #521599-2
[ULTRA-POD 187 ASY REC 18-14 TPBR](#)



TE Part #520974-2
[ULTRA-POD 250 ASSY REC 14-12 AWG TPBR](#)

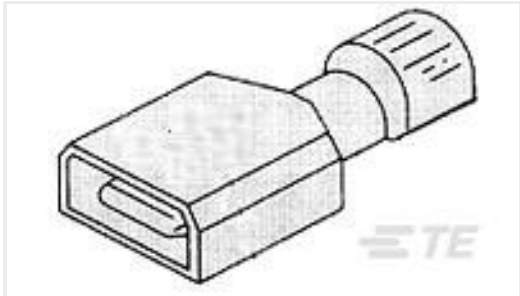


TE Part #4-521097-2
[ULTRA-FAST 250 ASY TAB 12-10 AWG TPBR](#)



TE Part #63316-2
[187 FASTON FLAG REC 18-14 AWG TPBR](#)



TE Part #322367
[DG 22-16COM22-18MIL HR R 1/4](#)

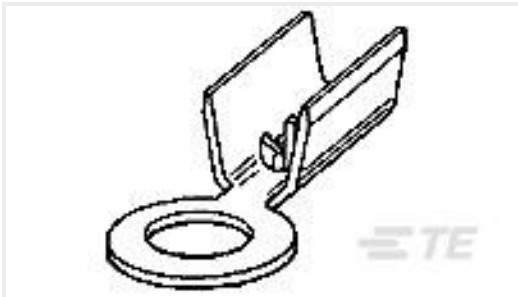


TE Part #60422-3
[RING 22-20 AWG NPBR](#)



TE Part #1-1969529-1
[ULTRA-POD 250 ASSEMBLY REC 18-14 AWG BR](#)



TE Part #1969897-1
[250 FASTON HSG.,REC.,5 POS,BLACK](#)

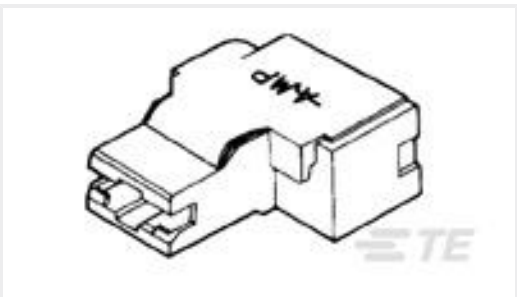

TE Part #172469-1
[POSITIVE LOCK 250 \(6.3 MM\) HOUSING](#)



TE Part #556879-5
[PLUG HSG,AMPINNERGY WTB,5 POS](#)

Documents

Product Drawings

[PL 250 FLAG REC 14-12 0.40 X 49.2 PTBR](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_172765-1_E.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_172765-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_172765-1_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Positive Lock Receptacles

English

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

1-Pos. '250' Flag, Positive Lock Connector

Japanese

Application Specification

Japanese