



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**
Connector & Housing Type: **Receptacle**
Number of Positions: **1**
Terminal Orientation: **Straight**
UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Connector & Contact Terminates To	Wire & Cable
Sealable	No
Connector System	Wire-to-Board, Wire-to-Wire
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	With

Mechanical Attachment

--



Mating Alignment Type	Polarization
Mating Retention Type	Latch
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	Nylon
------------------	-------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	100
--------------------	-----

Product Compliance

For compliance documentation, visit the product page on TE.com>

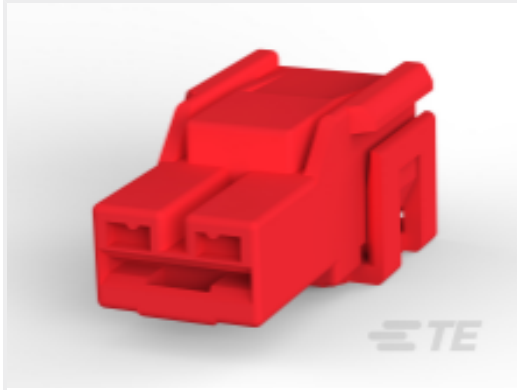
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

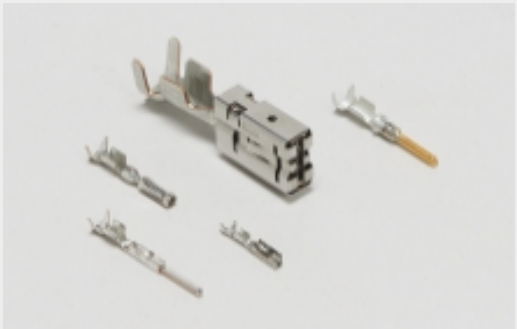
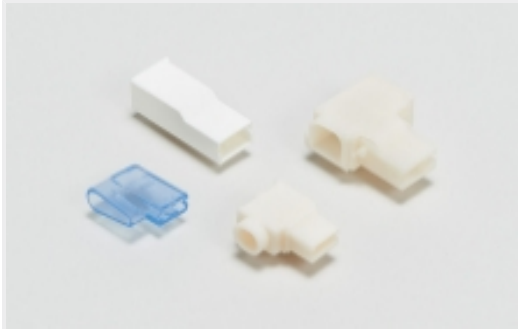
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

 TE Part # 170454-1 PL 250 AUTOMOTIVE REC 18-14 0.40 X 21 BR	 TE Part # 1969877-1 187 HIGH TEMP POS LOCK HSG LCP	 TE Part # 170456-1 PL 250 AUTOMOTIVE REC 12-10 0.40 X 21 BR	 TE Part # 172434-6 250 P.LOCK 2P HSG T-TYPE BLUE
 TE Part # 170456-2 PL 250 AM REC 12-10 0.40 X 21 PRE-TPBR	 TE Part # 170454-2 PL 250 AM REC 18-14 0.40 X 21 PRE-TPBR	 TE Part # 172863-8 250 P.LOCK MK-II 1P HSG RED	 TE Part # 170452-2 PL 250 AUTOMOTIVE REC 22-20 AWG PRE TPBR
 TE Part # 2219340-2 GLASS ANT 250 1P CAP HSG	 TE Part # 170452-1 PL 250 AM REC 22-20 AWG 0.406 X 21 BR	 TE Part # 172863-1 250 POSITIVE DBL LOCK 1P BR	

Also in the Series | Positive Lock 250

 Automotive Terminals(1)	 Crimp Terminal Housings(177)	 Insertion & Extraction Tools(3)	 Insulation Boots & Sleeves(5)
--	--	--	--



[Quick Disconnects\(173\)](#)

Customers Also Bought



TE Part #4-2188241-7
[RF STRIPLINE 1P REC HSG GRE](#)



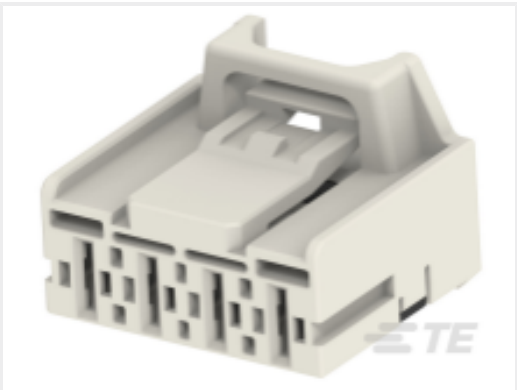
TE Part #1-2389770-3
[88POS,HYBRID,REC HSG ASSY, UNSLD,COD B](#)



TE Part #1897702-2
[JPT 2P PLUG ASSY](#)



TE Part #1674925-1
[0.64 III/1.0 III 34POS PLUG ASSY](#)



TE Part #2299956-1
[MCP 6.3MM 4P PLUG ASSY A](#)




TE Part #2372334-1
[REM0.64 Terminal](#)



TE Part #2373974-1
[025 14P JOINT CAP ASSY TYPE A](#)



TE Part #2373977-1
[025 14P JOINT PLUG ASSY TYPE A](#)



TE Part #2389775-6
[47POS,HYBRID,REC HSG ASSY,RED](#)



TE Part #2219340-2
[GLASS ANT 250 1P CAP HSG](#)

Documents

Product Drawings

[POSITIVE LOCK \(PL\) .250 \(6.3 MM\)](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_172863-2_N.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_172863-2_N.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_172863-2_N.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of Positive Lock Receptacle Contact

English

Application Specification

English

Crimping of 250 Series, Automotive Positive Lock Receptacle Contact

English

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

Instruction Sheet (non U.S.)

Japanese

Agency Approvals

UL Report

English