1734300-2 - ACTIVE

TE Internal #: 1734300-2 C-Clip PCB Spring Contact, 3 mm [.118 in] Uncompressed Height, 4.5 mm [.177 in] Length, 2.5 mm [.098 in] Width, 1.9 mm [.075 in] Working Range (Low)

View on TE.com >



Connectors > Contacts > PCB Spring Contacts



Spring Finger Type: C-Clip

Scalable: No

Side Protected: No

Uncompressed Height: 3 mm [.118 in]

Product Length: 4.5 mm [.177 in]

Features

Product Type Features

| Connector & Contact Terminates To | Printed Circuit Board |
|---|-----------------------|
| Connector System | Board-to-Board |
| Spring Finger Type | C-Clip |
| Scalable | No |
| Configuration Features | |
| Number of Positions | 1 |
| Side Protected | No |
| Contact Features | |
| Contact Underplating Material | Nickel |
| Contact Base Material | Copper Alloy |
| PCB Contact Termination Area Plating Material | Gold |
| Contact Working Range (Low) | 1.9 mm[.075 in] |
| Contact Working Range (High) | 2.8 mm[.11 in] |
| Point of Contact Area Plating Material | Gold |

1734300-2

C-Clip PCB Spring Contact, 3 mm [.118 in] Uncompressed Height, 4.5 mm [.177 in] Length, 2.5 mm [.098 in] Width, 1.9 mm [.075 in] Working Range (Low)



| Contact Current Rating (Max) | 1.5 A |
|---|-----------------------|
| Dimensions | |
| Uncompressed Height | 3 mm[.118 in] |
| Product Length | 4.5 mm[.177 in] |
| Product Width | 2.5 mm[.098 in] |
| Usage Conditions | |
| Operating Temperature Range | -40-85 °C[-40-185 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Packaging Features | |
| Packaging Method | Tape & Reel |
| Packaging Quantity | 2500 |
| Product Compliance For compliance documentation, visit the product page on TE.com> | |
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |

| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
|---|---|
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Reflow solder capable to 260°C |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

1734300-2


C-Clip PCB Spring Contact, 3 mm [.118 in] Uncompressed Height, 4.5 mm [.177 in] Length, 2.5 mm [.098 in] Width, 1.9 mm [.075 in] Working Range (Low)



Compatible Parts



Customers Also Bought

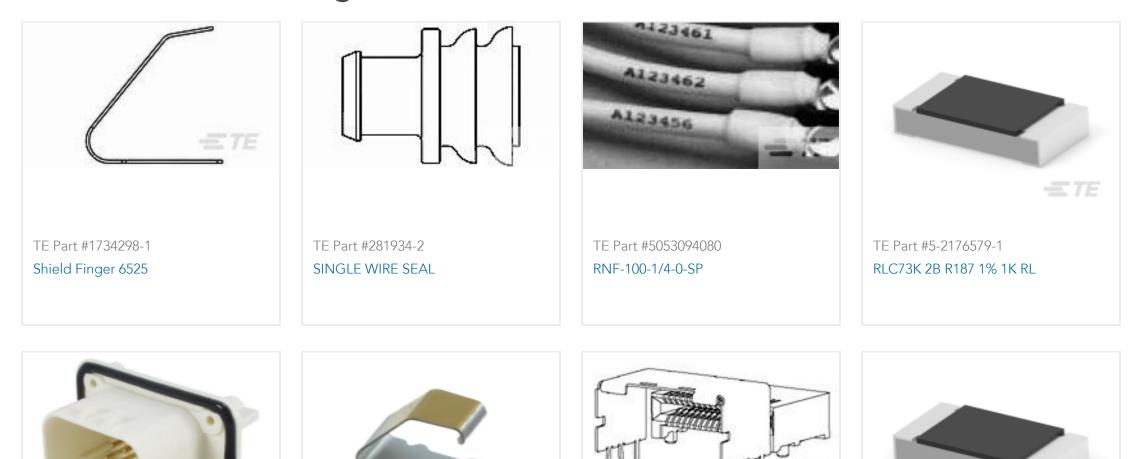





Documents

Product Drawings SHIELD FINGER 3025-Z1-T

English

CAD Files 3D PDF

1734300-2

C-Clip PCB Spring Contact, 3 mm [.118 in] Uncompressed Height, 4.5 mm [.177 in] Length, 2.5 mm [.098 in] Width, 1.9 mm [.075 in] Working Range (Low)



3D

Customer View Model ENG_CVM_CVM_1734300-2_B1.2d_dxf.zip English Customer View Model ENG_CVM_CVM_1734300-2_B1.3d_igs.zip English Customer View Model ENG_CVM_CVM_1734300-2_B1.3d_stp.zip English Product Specifications

SHIELD FINGER

English

Product Specification

English