
1734577-1 - ACTIVE

TE Internal #: 1734577-1 RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard -Latch Down, 8 Position, Standard Profile, Through Hole - Solder, Vertical

View on TE.com >



Connectors > Modular Jacks & Plugs > RJ45 Connectors

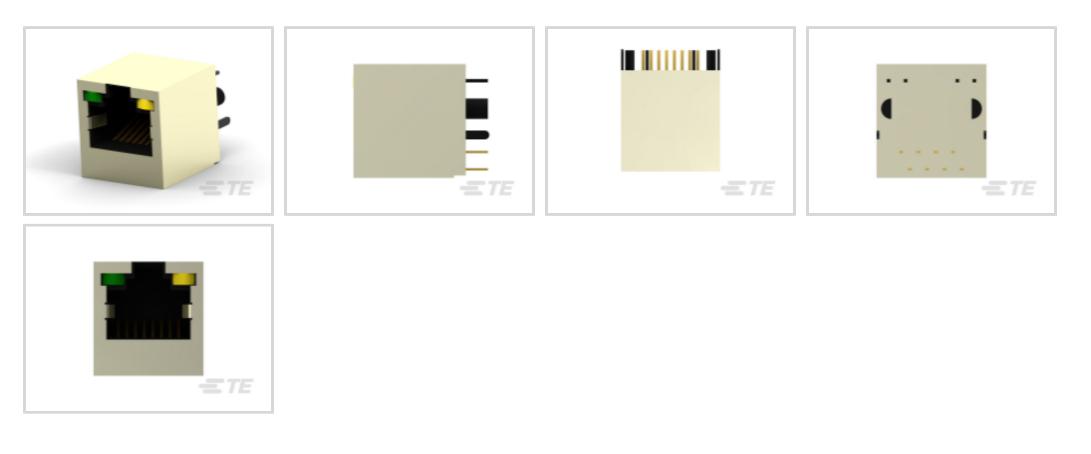

Modular Jack & Plug Interface Type: RJ45 Port Configuration: Single Port Port Matrix Configuration: 1 x 1 Modular Jacks & Plugs Products: RJ Type Jacks & Plugs

Connector Contact Density: Standard

Features

Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB Ground
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of PCB Ground Tabs	2
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8

Body Features

C For support call+1 800 522 6752

RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard - Latch Down, 8 Position, Standard Profile, Through Hole - Solder, Vertical



Shield Plating Material	Nickel
Shield Material	Brass
LED Color (Top Right)	Yellow
LED Color (Top Left)	Green
PCB Ground Tab Location	3.85 mm[.152 in]
Modular Jack Latch Orientation	Standard - Latch Down
Connector Profile	Standard
Contact Features	
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Gold Flash
Contact Current Rating (Max)	1 A
Contact Mating Area Plating Material	Gold (Au)
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	.38 μm[15 μin]
Termination Features	
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Board Mount, Panel Mount
Housing Features	
Mating Entry Location	Тор
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Black
Housing Material	PA 46 GF30
Dimensions	
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Thickness (Recommended) Connector Height	1.57 mm[.062 in] 16.5 mm[.65 in]
Connector Height	
Connector Height Usage Conditions	16.5 mm[.65 in]

RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard - Latch Down, 8 Position, Standard Profile, Through Hole - Solder, Vertical



Indicator Type	LED
Shielded	Yes
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Performance Category	Cat 3
Packaging Features	
Packaging Quantity	100
Packaging Method	Box & Tray, Tray
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE

2023 (235)

Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 265°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard - Latch Down, 8 Position, Standard Profile, Through Hole - Solder, Vertical



TE Part # 188729-1 8P.COVER/SOLD.STOP

Customers Also Bought



124POS, MIXED, HEADER ASSY

15P HDP20 PLUG ASSY



Documents

Product Drawings MOD-JK,8P8C,SHD W/LED, G/Y,6U"

English

CAD Files

Customer View Model

ENG_CVM_CVM_1734577-1_C.2d_dxf.zip

English

3D PDF

C For support call+1 800 522 6752

RJ45 Connector, Single Port, 1 x 1, Jack, Shielded, Cat 3, Standard - Latch Down, 8 Position, Standard Profile, Through Hole - Solder, Vertical



3D

Customer View Model ENG_CVM_CVM_1734577-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1734577-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773464-9_MODULAR_JACKS_SINGLE_PORT_PCB_MOUNT

English

Product Specifications

Product Specification

English

Product Specification

English