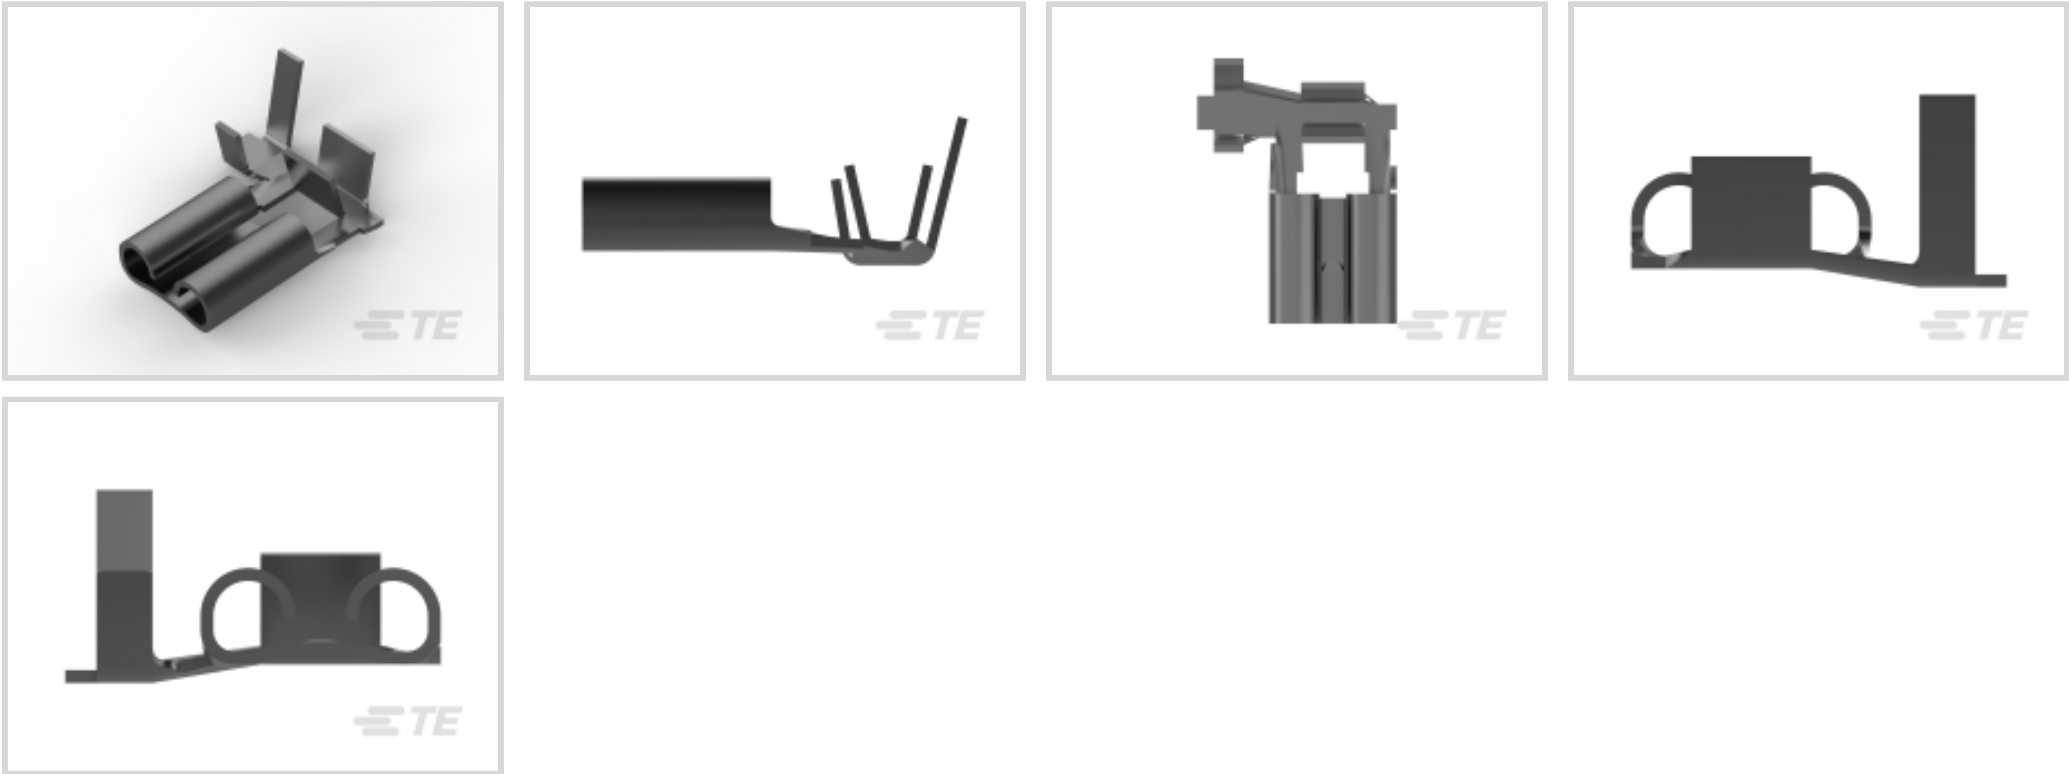




Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Low
-----------------	-----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Flag
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Dimensions

Product Length	15.34 mm[.604 in]
Compatible Insulation Diameter Range	2.79 – 4.06 mm[.11 – .16 in]
Terminal Material Thickness	.41 mm[.016 in]
Wire Size	.82 – 2.08 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

Compatible With Agency/Standards Products	UL
---	----

Packaging Features

Packaging Quantity	9000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

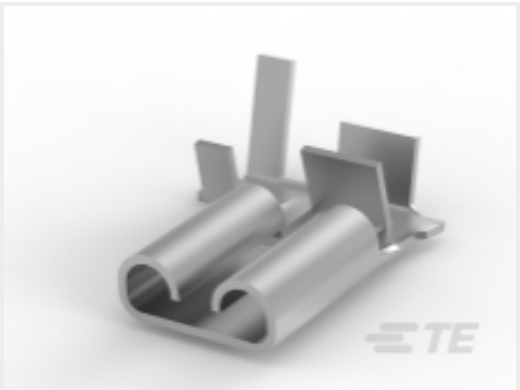
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

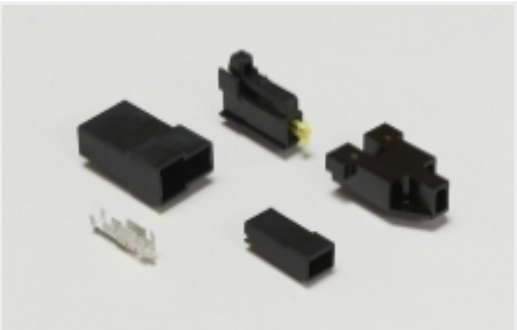


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 KIT REPRESENTATION ONLY			
TE Part # 7-2150398-7 OCEAN_2.0_SPARE_PART_KIT-100F180O	TE Part # 2150398-2 OCEAN_2.0_APPLICATOR- E-100F180O-SEA	TE Part # 1742999-3 250 FASTON,FLAG,REC.,18-14 AWG, TPBR	TE Part # 881006-2 .375 FASTON FLAG RE

Also in the Series | FASTON 250

 Compression Connectors(4)	 Crimp Terminal Housings(116)	 Insulation Boots & Sleeves(16)	 Magnet Wire Terminals(1)
 PCB Terminals(134)	 Quick Disconnects(421)	 Splices(4)	

Customers Also Bought





TE Part #41728
250 FASTON REC 16-12 AWG TPBR



TE Part #60487-1
187 FASTON REC 18-16 AWG BR



TE Part #1969507-2
250 FASTON HSG., FLAG, REC., 1 POS, NATURAL



TE Part #1971779-2
PTL RECEPTACLE CONTACT, 12 AWG



TE Part #CAT-P87074-C1701A
POWER TRIPLE LOCK High Temperature Caps



TE Part #F82626-000
SCT-NO.2-E5-0-40MM



TE Part #60196-2
187 FASTON REC 20-16 AWG TPBR



TE Part #1971778-3
PTL TPA HIGH TEMP 2 x 3 BLACK



TE Part #41808
RING TERMINAL 10-8 AWG TPCU

Documents

Product Drawings
250 FASTON,FLAG,REC.,18-14 AWG,TPBR
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_1742999-2_A_c-1742999-2-a.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_1742999-2_A_c-1742999-2-a.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_1742999-2_A_c-1742999-2-a.3d_stp.zip
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



Introductory Flyer - Low Insertion Force FASTON Terminals

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English