




Connectors > Rectangular Connectors > Standard Rectangular Connectors

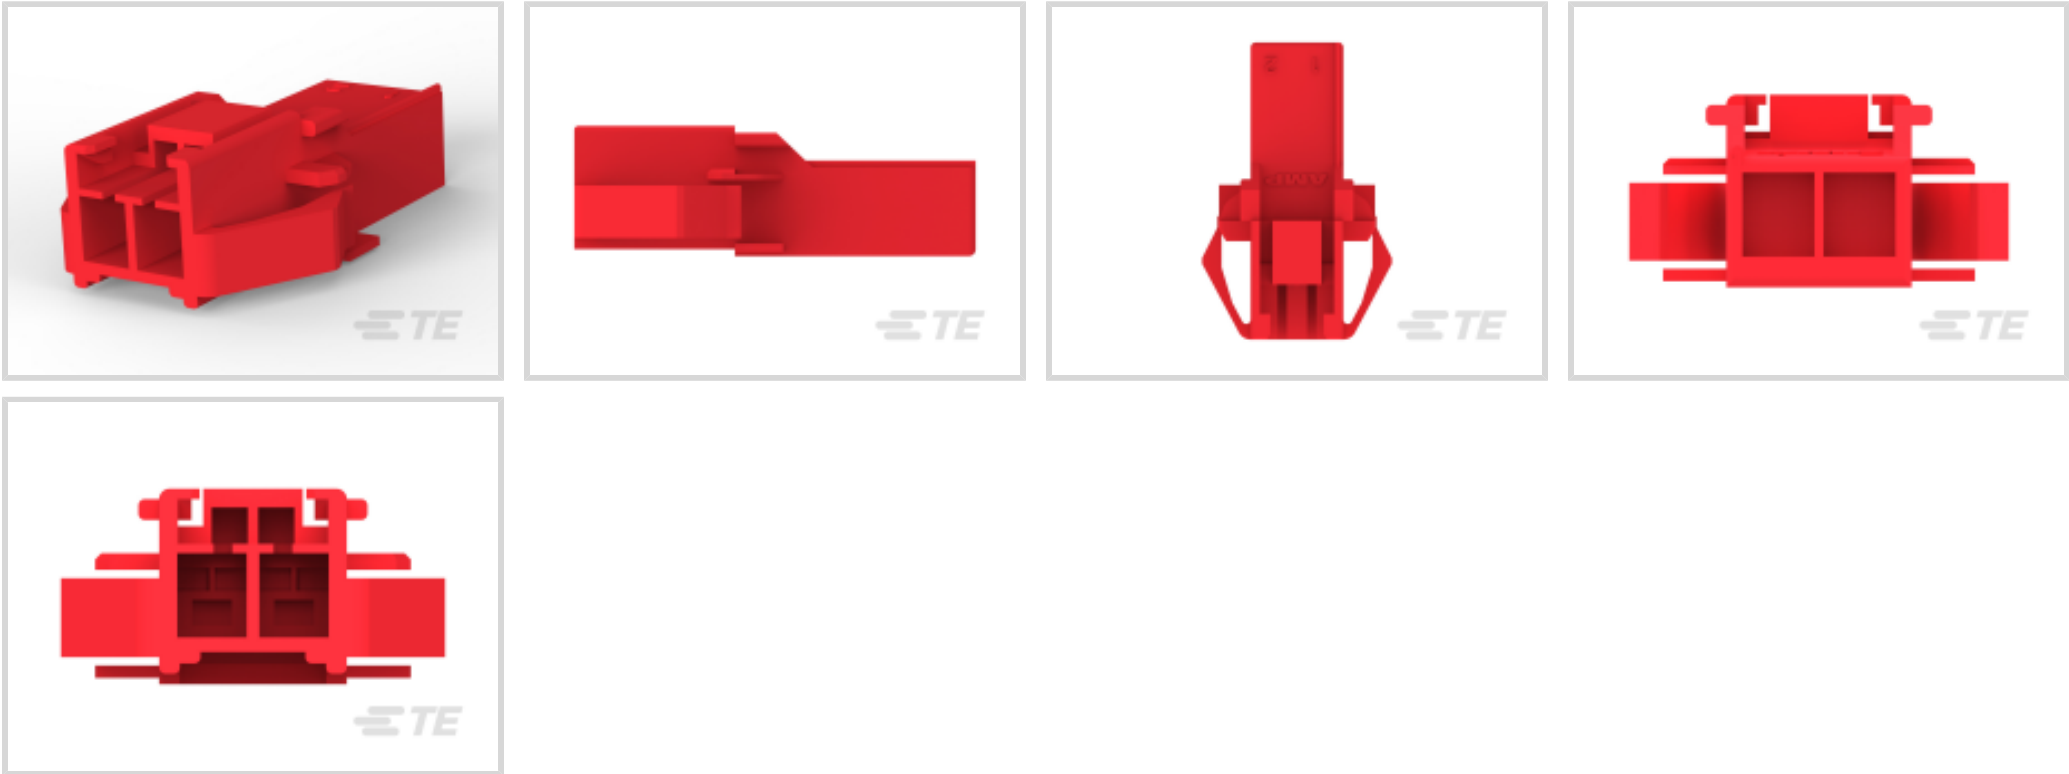

Connector Product Type: **Housing**

Connector & Housing Type: **Receptacle**

Mating Alignment: **With**

Mating Alignment Type: **Polarization**

Mating Retention: **With**

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Insulation Resistance	1000 MΩ
Operating Voltage	300 VAC

Body Features

Primary Product Color	Red
-----------------------	-----



Contact Features

Contact Layout	Inline
Contact Base Material	Copper Alloy
Contact Type	Tab
Contact Retention Within Housing	Without
Contact Current Rating (Max)	7 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Panel Mount Feature	With
Mating Alignment	With
Mating Alignment Type	Polarization
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	Nylon 6/6
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Connector Height	8.9 mm[.35 in]
Connector Length	29 mm[1.14 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag



Product Compliance


For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

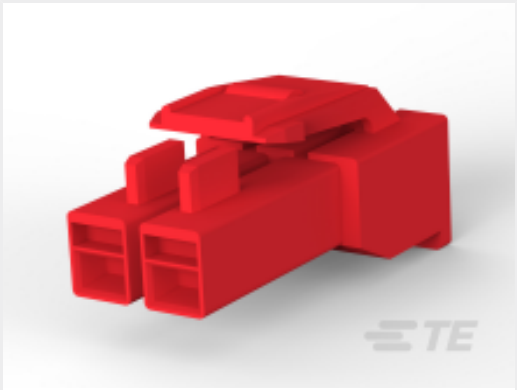


TE Part # 176271-2
AMP UNIVERSAL POWER PLUG 2P



TE Part # 175150-1
UNIVERSAL POWER CONN TAB



TE Part # 176271-1
AMP UNIVERSAL POWER PLUG 2P

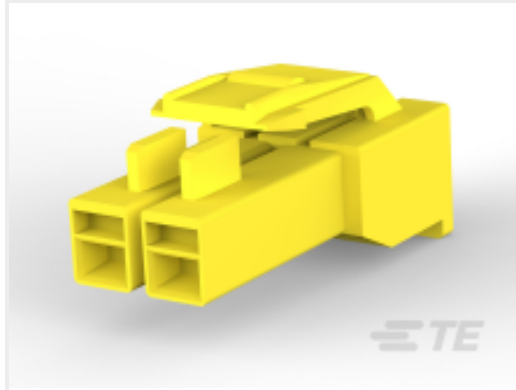


TE Part # 176271-4
AMP UNIVERSAL POWER PLUG 2P





TE Part # 175150-2
AMP UNIVE. POWER CONN TAB
CONT

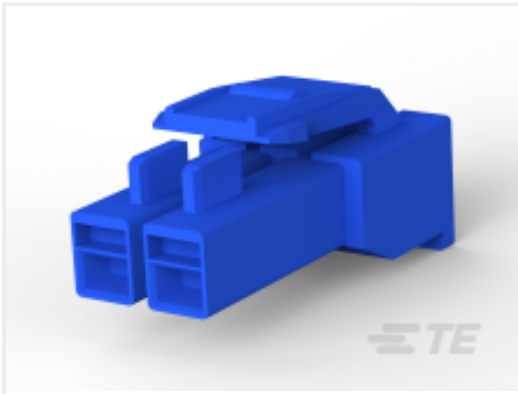

TE Part # 176271-6
AMP UNIVERSAL POWER PLUG 2P



TE Part # 175153-2
U/P TAB CONT L/P



TE Part # 175153-1
UNIV POWER TAB CONT L/P



TE Part # 175154-1
UNIV POWER TAB CONT L/P



TE Part # 175149-3
AMP UNIVERSAL POWER CONN.TAB
C



TE Part # 175149-2
AMP UNIVE. POWER CONN TAB
CONT



TE Part # 175149-1
UNIVERSAL POWER CONN TAB



TE Part # 176271-9
AMP UNIVERSAL POWER PLUG 2P




TE Part # 175154-2
U/P TAB CONT L/P

Also in the Series | AMP Universal Power



Connector Contacts(22)

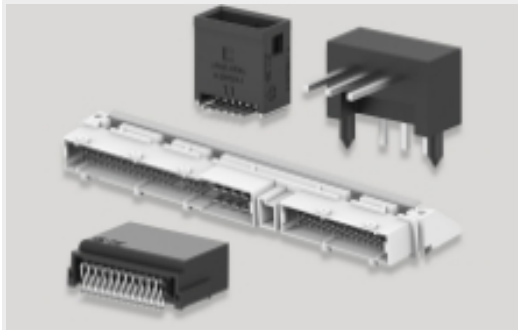

PCB Headers & Receptacles(51)




Power Contacts(21)




Rectangular Connector Housings(112)



Rectangular Power Connectors(163)

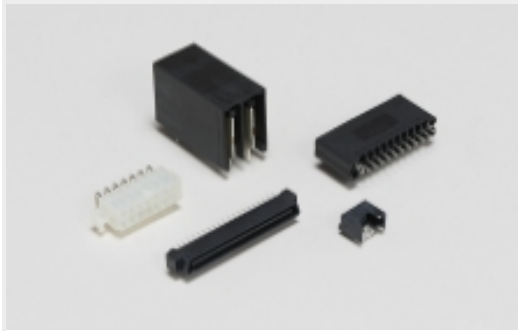

Standard Rectangular Connectors(112)

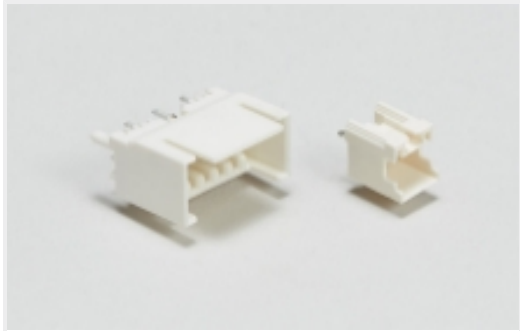

Wire-to-Board Headers & Receptacles
(51)

Customers Also Bought



TE Part #175149-2
AMP UNIVE. POWER CONN TAB
CONT



TE Part #176282-2
AMP UNIVERSAL POWER CAP 2P



TE Part #1599186-2
HSG ASSY 76 POSN SOCKET CONT



TE Part #1969632-1
250 FASTON HSG.,REC.,1 POS,BLACK



TE Part #103653-1
02 MTE SHRD PIN HSG SR LATCH




TE Part #2306498-1
2 P, MATE-AX,PIN HSG, COD A



TE Part #350873-1
UMNL PIN 18-14 .0126 PTPBR



TE Part #176498-6
PL MKII 187 REC HSG 2P NYLON BLUE

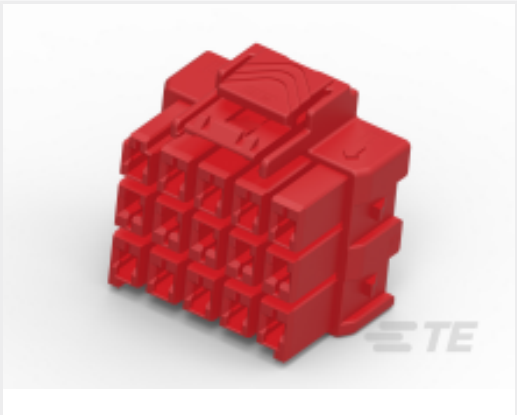

TE Part #CAT-P87074-P729A
High Temperature Plug — POWER
TRIPLE LOCK

Documents

Product Drawings

UNIV POWER CAP HSG 2P P/MOUNT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_176292-2_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_176292-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_176292-2_G.3d_stp.zip

English

3D PDF

English



Customer View Model

[ENG_CVM_176292-2_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_176292-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_176292-2_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of Universal Power Contact](#)

English

[Product Specification](#)

Japanese

[AMP Universal Power Connector](#)

Japanese

Instruction Sheets

[AMP UNIVERSAL POWER CONNECTOR SERIES](#)

English

[Instruction Sheet \(non U.S.\)](#)

English

Agency Approvals

[UL Report](#)

English