1775441-3 - ACTIVE

HPI

TE Internal #: 1775441-3 Housing, Receptacle, Crimp, Wire-to-Wire, UL 94V-0, 3 Position, 1.5 mm [.059 in] Centerline, HPI, Rectangular Wire & Cable Connectors & Housings

View on TE.com >

Connectors > Rectangular Connectors > Standard Rectangular Connectors > AMP HPI 1.5 mm Receptacle Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Mating Retention: With Mating Retention Type: Locking Termination Method to Wire & Cable: Crimp

All AMP HPI 1.5 mm Receptacle Housings (14)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Natural

Housing, Receptacle, Crimp, Wire-to-Wire, UL 94V-0, 3 Position, 1.5 mm [.059 in] Centerline, HPI, Rectangular Wire & Cable Connectors & Housings



Contact Features

Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
Mating Retention	With
Mating Retention Type	Locking
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	1.5 mm[.059 in]
Dimensions	
Connector Width	6.15 mm[.249 in]
Connector Height	2.7 mm[.106 in]
Wire Size	30 – 24 AWG
Connector Length	5.6 mm[.22 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Bag
Packaging Quantity	1000

For compliance documentation, visit the product page on TE.com>

Housing, Receptacle, Crimp, Wire-to-Wire, UL 94V-0, 3 Position, 1.5 mm [.059 in] Centerline, HPI, Rectangular Wire & Cable Connectors & Housings



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | HPI

Housing, Receptacle, Crimp, Wire-to-Wire, UL 94V-0, 3 Position, 1.5 mm [.059 in] Centerline, HPI, Rectangular Wire & Cable Connectors & Housings





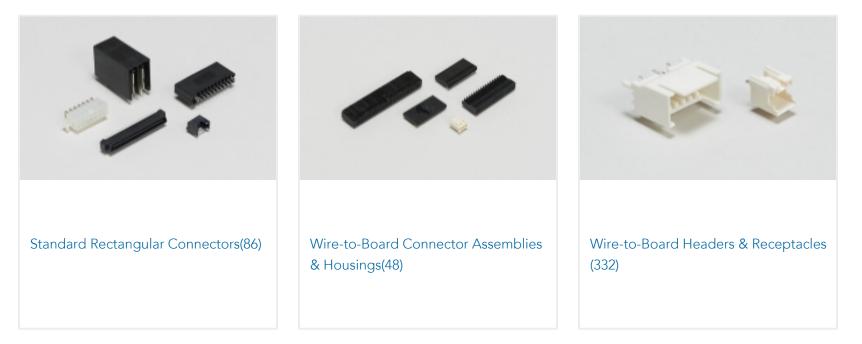

Customers Also Bought



Contact, female0.64 ,0.13sqmm,

GET MALE TERM, A, SN, REREEL

NPST

250 FASTON, FLAG, REC., 18-12 AWG,

2P GENERATION Y Plug, Single-P

YZZ · =TE TE Part #964314-1 TE Part #2333104-1 TE Part #6-1419166-1 TE Part #1-1924067-4 2POS, MCON 1.2 CB REC 2p TL 4POS,NANOMQS,REC HSG ASSY, 1X4MALE IL ASSY "A" TAB A 5.8x0.8 CONTACT CF SWS Sn COD A SEALED



Documents

S For support call+1 800 522 6752

Housing, Receptacle, Crimp, Wire-to-Wire, UL 94V-0, 3 Position, 1.5 mm [.059 in] Centerline, HPI, Rectangular Wire & Cable Connectors & Housings



Product Drawings EMIX CONN., 1.5MM PITCH, RCPT, HSG, 3P

English

CAD Files

Customer View Model ENG_CVM_CVM_1775441-3_B.2d_dxf.zip

English

3D PDF 3D

Customer View Model ENG_CVM_CVM_1775441-3_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1775441-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

HPI Connectors QRG

English

Product Specifications Application Specification

English