

Power Double Lock


TE Internal #: 177900-4

Housing, Plug, Crimp, Wire-to-Wire, UL 94V-0, 4 Position, Power Double Lock, Rectangular Wire & Cable Connectors & Housings

[View on TE.com >](#)



Connectors > Rectangular Connectors > Standard Rectangular Connectors > STD Temp Power Double Lock Plug

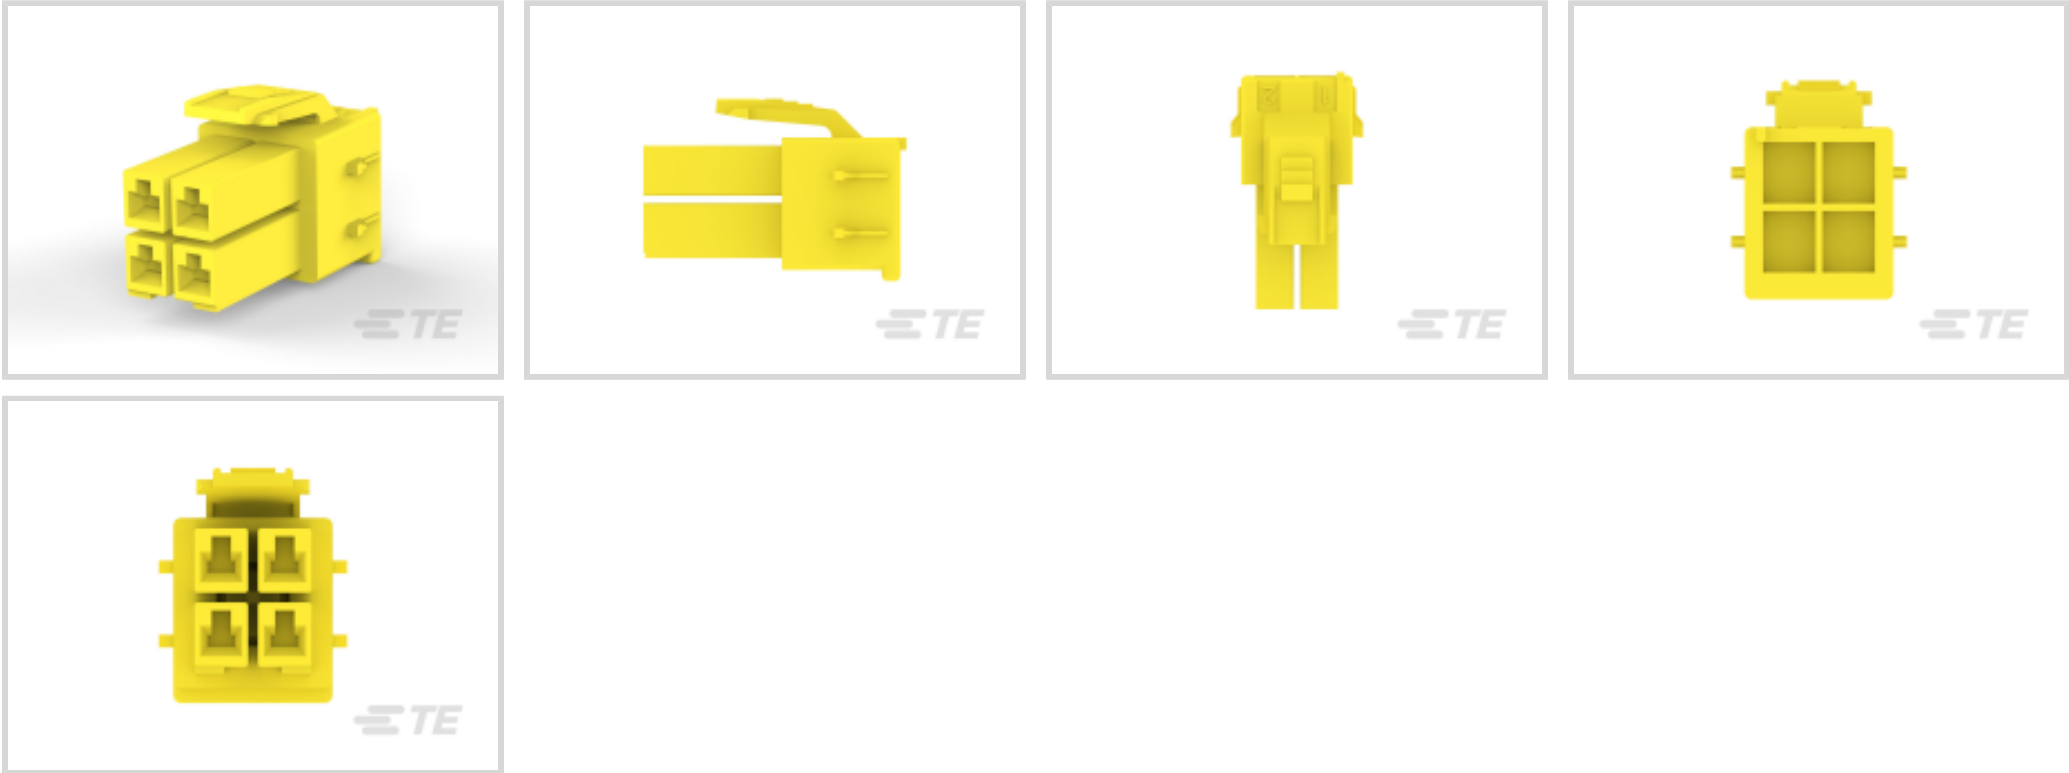

Connector Product Type: **Housing**

Connector & Housing Type: **Plug**

Termination Method to Wire & Cable: **Crimp**

Connector System: **Wire-to-Wire**

Contact Retention Within Housing: **Without**

[All STD Temp Power Double Lock Plug \(66\)](#)

Features

Product Type Features

Compatible With Discrete Wire Type	Stranded
Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Signal Positions	0
Number of Power Positions	0
Number of Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------



Body Features

Primary Product Color	Yellow
-----------------------	--------

Contact Features

Contact Layout	Matrix
Contact Type	Receptacle
Contact Retention Within Housing	Without

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	Nylon 6/6
Centerline (Pitch)	3.96 mm[.156 in]

Dimensions

Row-to-Row Spacing	4.6 mm[.181 in]
Connector Width	11.5 mm
Connector Height	20.6 mm
Connector Length	20.5 mm

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA, VDE
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	300
Packaging Method	Bag



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 179840-4
AMP POWER D/LOCK T/HDR ASSY 4P



TE Part # 1-179840-4
PDL 4P HDR 3.96 DR V/T ASSY YEL



TE Part # 1-368575-4
PDL 4P PLUG 3.96 D/R(GWT) YEL



TE Part # CAT-P87024-R2435
Power Double Lock Receptacle



TE Part # CAT-P87024-C1701
STD Temp Power Double Lock Cap

TE Part # 179593-2
POWER D/LOCK REC CONT. H/P L/P

TE Part # 179852-4
AMP POWER D/LOCK TAB HDR 4P V

TE Part # 179592-1
AMP POWER D/LOCK REC CONT. L/P

TE Part # 179592-2
POWER D/LOCK REC CONT. H/P L/P

TE Part # 179593-1
AMP POWER D/LOCK RECCONT. L/P

Also in the Series | Power Double Lock

Connector Contacts(24)

Connector Hardware(14)

Insertion & Extraction Tools(2)

PCB Headers & Receptacles(43)

Power Contacts(24)

Rectangular Power Connectors(283)

Wire-to-Board Headers & Receptacles (43)

Customers Also Bought

TE Part #8-1971772-4
PTL 1X4 CAP PANEL MT HITEMP KEY D NAT

TE Part #1969718-1
250 POS LOCK & STD HSG NAT

TE Part #1744417-9
9 POS EP 2.5 HSG, GLOW WIRE

TE Part #770904-1
MINI UMNL SOK 22-18 AWG SN



Documents

Product Drawings

POWER DBL LOCK PLUG HSG 4P

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_177900-4_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_177900-4_F.3d_igs.zip

English

Customer View Model

ENG_CVM_177900-4_F.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_177900-4_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_177900-4_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_177900-4_S.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG
English

Product Specifications
Application Specification
English

Instruction Sheets
Instruction Sheet (non U.S.)
English
AMP POWER DOUBLELOCK CONNECTOR SERIES
English

Agency Approvals
CSA Certificate
English