




Terminals & Splices > Quick Disconnects

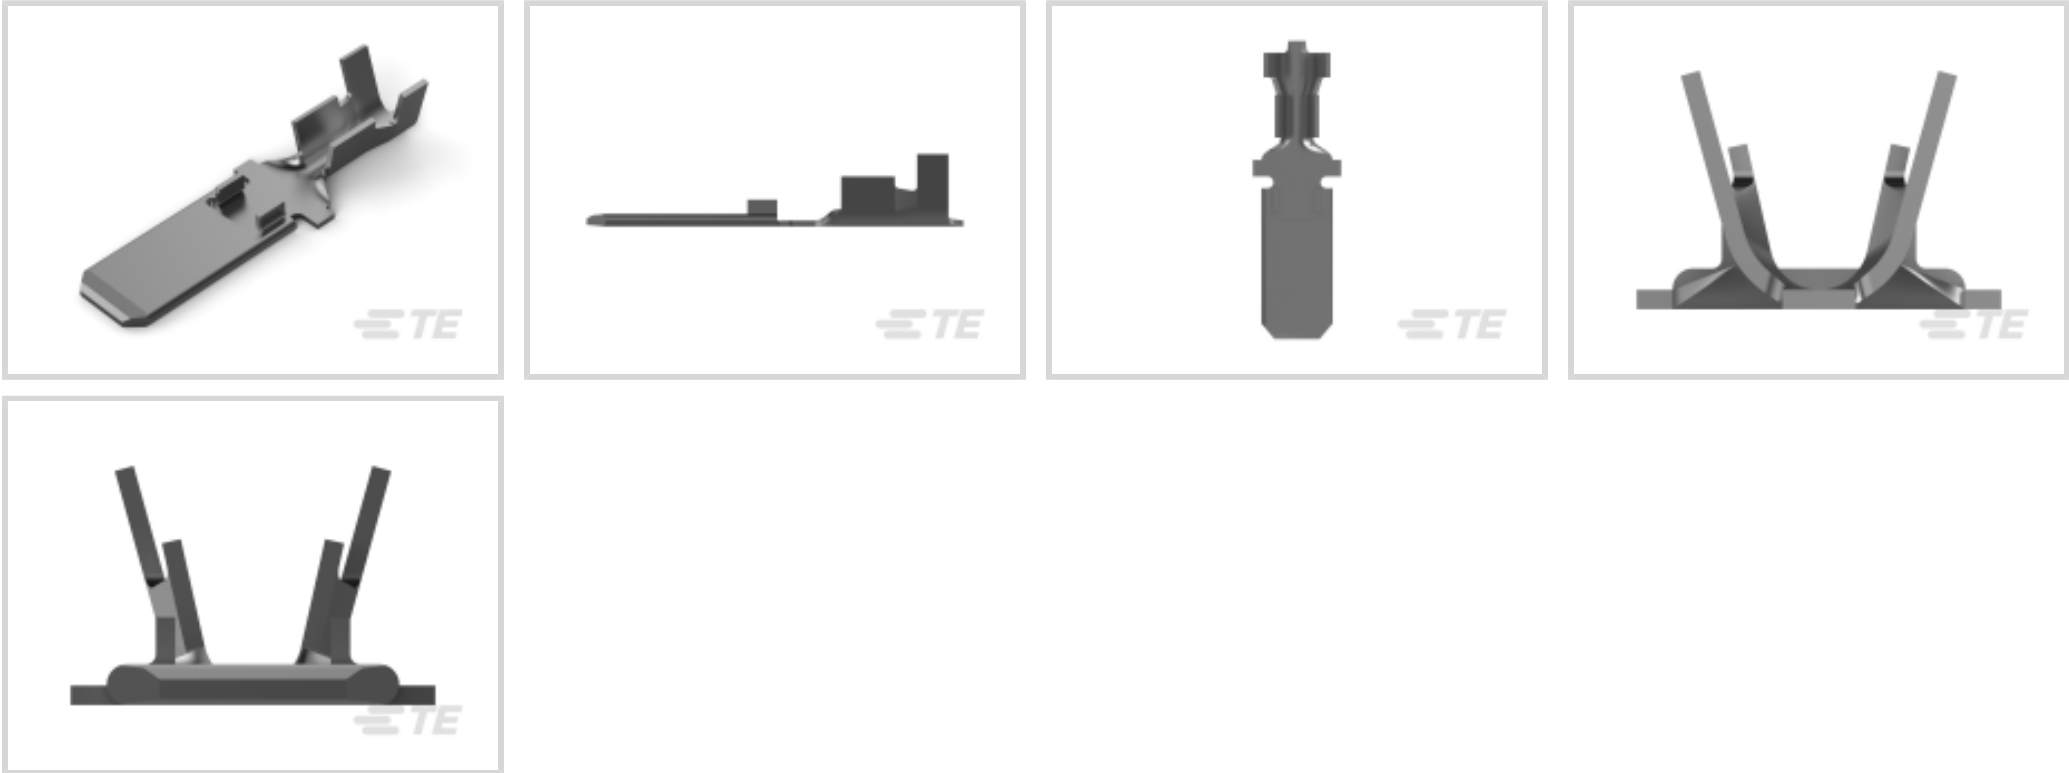

Quick Disconnect Terminal Type: **Tab**

Wire Size: **.51 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
| Connection Capacity               | Single        |

Contact Features

|                                |                 |
|--------------------------------|-----------------|
| Quick Disconnect Terminal Type | Tab             |
| Mating Tab Width               | 6.35 mm[.25 in] |
| Mating Tab Thickness           | .81 mm[.032 in] |
| Terminal Orientation           | Straight        |
| Contact Base Material          | Brass           |
| Terminal Plating Material      | Tin             |
| Crimp Type                     | F-Crimp         |
| Barrel Type                    | Open            |

Termination Features

|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

|                         |      |
|-------------------------|------|
| Wire Insulation Support | With |
|-------------------------|------|



|                                      |                              |
|--------------------------------------|------------------------------|
| Mating Retention Type                | Locking Lance                |
| Dimensions                           |                              |
| Product Length                       | 25.8 mm[1.01 in]             |
| Compatible Insulation Diameter Range | 2.1 – 3.4 mm[.083 – .134 in] |
| Terminal Material Thickness          | .41 mm[.016 in]              |
| Wire Size                            | .51 – 2.08 mm²               |
| Usage Conditions                     |                              |
| Insulation Option                    | Uninsulated                  |
| Operating Temperature Range          | -40 – 110 °C[-40 – 230 °F]   |
| Packaging Features                   |                              |
| Packaging Quantity                   | 1000                         |
| Packaging Method                     | Loose Piece/Carton           |
| Other                                |                              |
| Line                                 | FASTON .250                  |

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 2297438-3  
MMF,FREE HANGING,CAP HOUSING




TE Part # 784640-1  
EXT TOOL FOR POS LOCK MKI



TE Part # 934677-1  
DAHT 250 FASTON TAB 20-14 ASSY

Also in the Series | FASTIN-FASTON 250

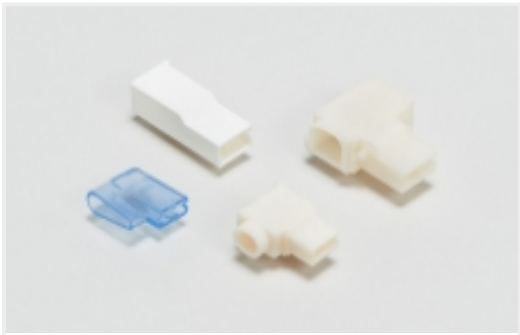

Crimp Terminal Housings(195)




Insertion & Extraction Tools(2)



Quick Disconnects(216)

Customers Also Bought

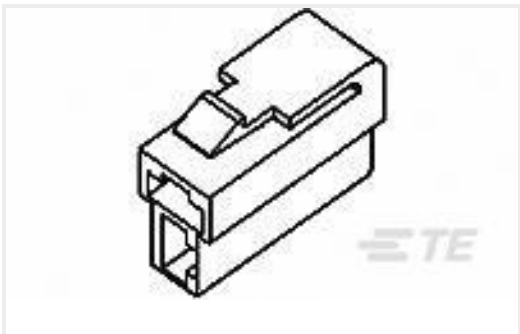

TE Part #172130-1  
FF 250 REC HSG 2P NYLON NAT




TE Part #1-172888-3  
COMPRUBBER PLUG SILICON




TE Part #170341-3  
FF 250 TAB 14-12AWG PTBR WITHOUT LATCH



TE Part #1-172131-1  
FF 250 CAP HSG 3P NYLON NAT

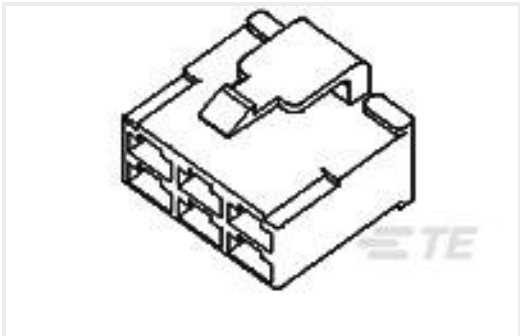

TE Part #171898-1  
FF 250 PLUG HSG 6P NYLON NAT

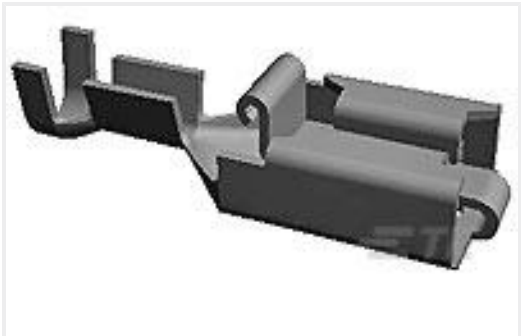

TE Part #160773-6  
PL LOOSE PIECE REC 0.5-1.5 MM2 PTPBR



TE Part #1879246-3  
RN 0603 5K0 1% 5PPM 5K RL



TE Part #DRC26-24SB  
PLG, 24P, BLK, N, B



Documents

Product Drawings

FF 250 TAB 20-14AWG W/O LATCH LP

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_179462-3\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_179462-3\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_179462-3\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of 250 Series Tab and Receptacle Contacts

Japanese

Application Specification

Japanese

Application Specification

Japanese

Crimping of 250 Series Tab and Receptacle Contacts

Japanese