




Terminals & Splices > Quick Disconnects

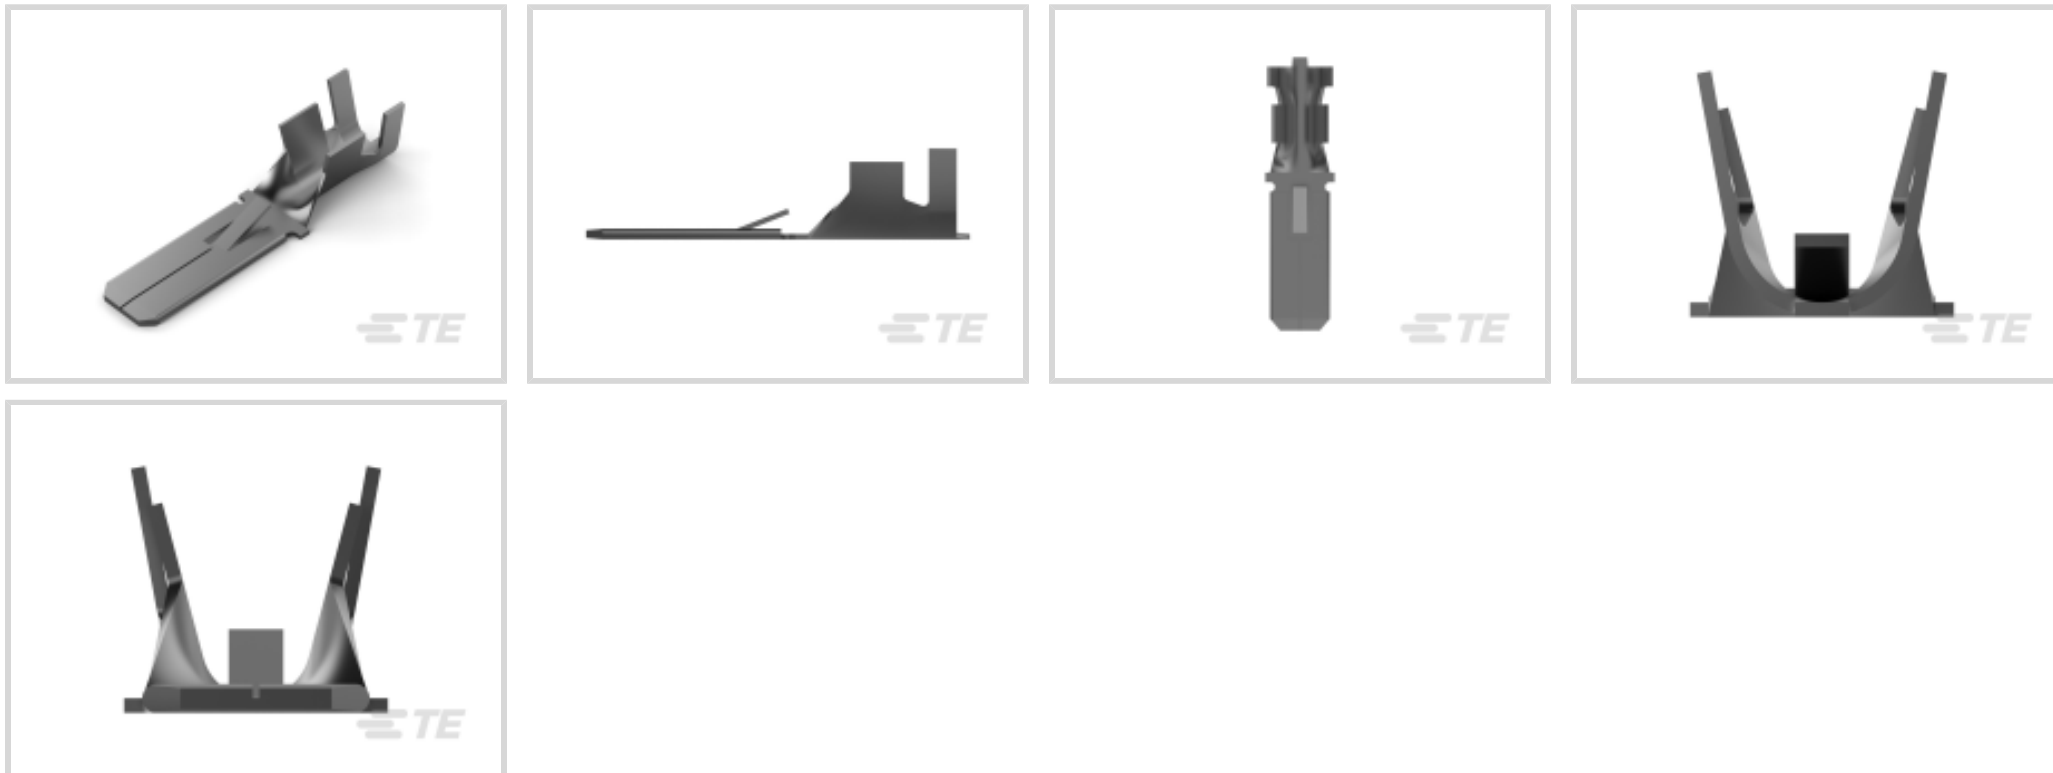

Quick Disconnect Terminal Type: **Tab**

Wire Size: **4 – 6.63 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Insertion Force	Normal
-----------------	--------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Contact Features

Quick Disconnect Terminal Type	Tab
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Termination Features

--	--



Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Locking Lance Height	1.4 mm
----------------------	--------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Locking Lance
-----------------------	---------------

Dimensions

Product Length	29 mm[1.14 in]
----------------	----------------

Compatible Insulation Diameter Range	3.43 – 5.08 mm[.135 – .2 in]
--------------------------------------	------------------------------

Terminal Material Thickness	.41 mm[.016 in]
-----------------------------	-----------------

Wire Size	4 – 6.63 mm ²
-----------	--------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	500
--------------------	-----

Packaging Method	Loose Piece/Carton
------------------	--------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



REPRESENTATION ONLY. DIE SET MAY VARY. TE

TE Part # 2379381-1
SDE F, FASTIN-FASTON, 4.0-6.0mm², ASSY



TE Part # 1-1579007-4
EXTRACTION TOOL



TE Part # 4-1579007-3
EXTRACTION TOOL KIT



TE Part # 928906-2
FF 110 TAB 20-15 AWG .016 TPPB



TE Part # 2379381-2
SDE F, FASTIN-FASTON, 4.0-6.0mm², DIE SET




TE Part # 641256-1
BLADE TAB 250 18-14AWG BR LP




TE Part # 180250
HHHT FSTON/FF 375 POS LOC 250 6-2 ASSY


Also in the Series | FASTIN-FASTON 250

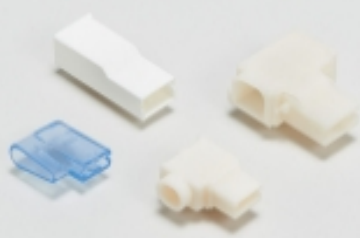

Crimp Terminal Housings(195)



Insertion & Extraction Tools(2)



Quick Disconnects(216)

Customers Also Bought




TE Part #1623925-8
CFR100 5% 150R



TE Part #726346
SO RINGTONG 6-35




TE Part #K1008784
Relay 26-56-02

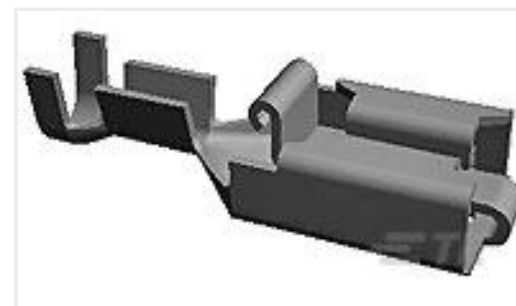

TE Part #154717-3
PL 250 REC TERMINAL 14-11 AWG
TPBR




TE Part #4-1746741-4
RITS CONN. SOCKET ASSY 4P GREEN

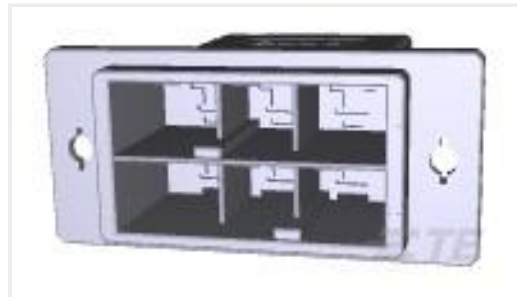

TE Part #3-917809-3
DYNAMIC D-5 TAB HSG D/R 6P X-Y



TE Part #464244-E
SRCA 1,27 6 F 1 IDC22 137 E1 094 1,27
TR

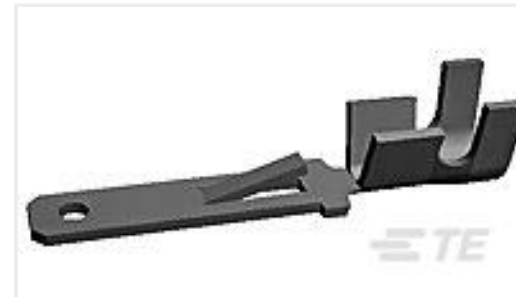

TE Part #42098-2
FF 250 TAB 18-14 AWG PTPB
TR



TE Part #61-0040-011-P00
CONTACT PIN 3,6 MM



TE Part #1-282079-2
AMP SUPERSEAL 1.5 SERIES 1P PLUG
ASS'Y

Documents

Product Drawings

[FF 250 TAB 4-6MM2 PTBR LP](#)

English

[FF 250 TAB 4-6MM2 PTBR LP](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_180409-2_F_c-180409-2-f.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_180409-2_F_c-180409-2-f.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_180409-2_F_c-180409-2-f.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[FASTIN-FASTON CONN. .110 INCH, .187 INCH, .250 INCH, .375 INCH SRS.](#)

English

[Product Specification](#)

English