

M12 Connector

TE Internal #: 1838274-4 8 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Reverse Gender, Plastic, A Code, PA, Hermetically Sealed, M12 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors



Number of Positions: 8

Connector System: Cable-to-Cable

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 2A

Features



Product Type Features

Assembly Requirement	Factory Assembled
Circular Connector Shell Type	All Plastic
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector
Prewired	No
Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Plastic
Configuration Features	
Keying & Polarized Position Locations	A
Factory Installed Backshell	With
Number of Positions	8

8 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Reverse Gender, Plastic, A Code, PA, Hermetically Sealed, M12 Connector



Number of Power Positions	0
Number of Signal Positions	8
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	500 VAC
Body Features	
O-Ring Material	EPDM
Environmental Protection	IP67
Environmental Protection Type	Sealed
Primary Product Color	Black
Shell Base Material	Plastic
Circular Connector Insulation Material Type	PA
Hermetically Sealed	Yes
Contact Features	
Contact Current Rating (Max)	2 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket

Termination Features

Termination Method to Wire & Cable	Solder
Mechanical Attachment	
Mating Retention Type	Threaded
Mating Alignment	With
Polarization Code	A
Mating Alignment Type	Keyed
Mating Retention	With
Housing Features	
Circular Connector Shell Size	15
Dimensions	
Wire Size	22 – 20 AWG
Usage Conditions	
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]

8 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Reverse Gender, Plastic, A Code, PA, Hermetically Sealed, M12 Connector



Operation/Application

Circuit Application	Signal
Shielded	No
Industry Standards	
Compatible With Approved Standards Products	IEC
Packaging Features	
Packaging Quantity	50
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold

Halogen Content

Solder Process Capability

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Hand solderable with lead free solder

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

8 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Reverse Gender, Plastic, A Code, PA, Hermetically Sealed, M12 Connector





Also in the Series | M12 Connector

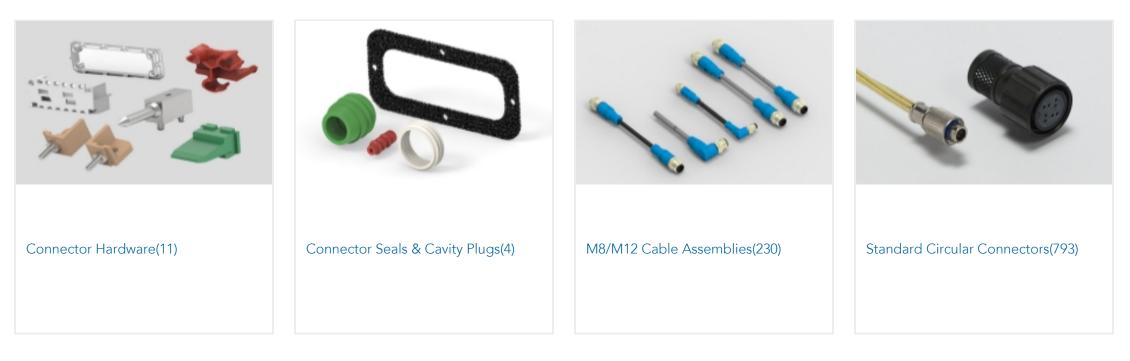

Customers Also Bought



M8 CABLE ST M 1.5M 3POS PVC

CABLE

EP 2.5 RCPT CONTACT, 24-20 AWG

M8.FMLE.PNLREAR.4POS.STR



IDC LOW PRO HDR 40P VERT SHT L

8 Position Circular Connector, Cable-to-Cable, Sealable, Wire & Cable, Signal, Reverse Gender, Plastic, A Code, PA, Hermetically Sealed, M12 Connector



Documents

Product Drawings M12 Fld Ser CONN. Female Skt Sldr

English

CAD Files

Customer View Model ENG_CVM_CVM_1838274-4_C.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1838274-4_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1838274-4_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

M8 / M12 Connector System Catalog

English

M8 / M12 Connector System Catalog

Japanese

Product Specifications Application Specification

English