



Connectors > Automotive Connectors > Automotive Housings



Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Centerline (Pitch): 5 mm [ .197 in ]

Sealable: Yes

Features

Product Type Features

|                          |   |
|--------------------------|---|
| Mixed & Hybrid Connector | No  |
| Connector Shape          | Rectangular                                 |
| Connector & Housing Type | Housing for Female Terminals                |
| Connector System         | Wire-to-Board, Wire-to-Device, Wire-to-Wire |
| Sealable                 | Yes   |
| Primary Locking Feature  | Integrated in Housing                       |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Positions | 4 |
| Number of Rows      | 2 |

Electrical Characteristics

|                              |   |
|------------------------------|---|
| Operating Voltage            | 125 VDC                                   |
| Nominal Voltage Architecture | 12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V |

Body Features

|                         |      |
|-------------------------|------|
| Cable Exit Angle        | 180° |
| Primary Product Color   | Gray |
| Connector & Keying Code | B    |

Contact Features

|  |  |
|--|--|
|  |  |
|--|--|



|              |       |
|--------------|-------|
| Contact Size | 1.8mm |
|--------------|-------|

Mechanical Attachment

|                             |                            |
|-----------------------------|----------------------------|
| Strain Relief               | Without                    |
| Terminal Position Assurance | No                         |
| Mating Alignment Type       | Keyed                      |
| Mating Alignment            | With                       |
| Connector Mounting Type     | Cable Mount (Free-Hanging) |

Housing Features

|                    |               |
|--------------------|---------------|
| Housing Material   | PBT GF        |
| Centerline (Pitch) | 5 mm[.197 in] |

Dimensions

|                  |                   |
|------------------|-------------------|
| Product Width    | 30.6 mm[1.205 in] |
| Product Length   | 23.2 mm[.91 in]   |
| Connector Height | 27.6 mm[1.09 in]  |

Usage Conditions

|                             |   |
|-----------------------------|---|
| Operating Temperature (Max) | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F] |
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F]  |

Industry Standards

|                        |         |
|------------------------|---------|
| UL Flammability Rating | UL 94HB |
|------------------------|---------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 1       |
| Packaging Method   | Package |

Other

|                                      |     |
|--------------------------------------|-----|
| Serviceable                          | Yes |
| Connector Position Assurance Capable | No  |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                              |           |
|------------------------------|-----------|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC  | Compliant |










|   |   |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free   |
| Solder Process Capability                     | Not applicable for solder process capability  |









Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




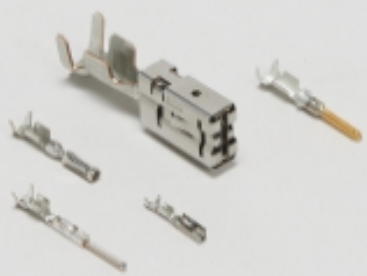


Compatible Parts

|   |   |   |   |
|---|---|---|---|
| <br>TE Part # 184301-1<br>2X2 PLG ASY KEY C C4         | <br>TE Part # 184305-1<br>2X2 CAP ASY KEY C C4           | <br>TE Part # 184373-2<br>CONTACT, RECEPTACLE, .070 TYPE | <br>TE Part # 184284-1<br>4P,2X2 PLUG ASSY W/O SLOT,KEYB |
| <br>TE Part # 184139-1<br>WIRE SEAL,RUBBER,SENSOR,BLUE | <br>TE Part # 184397-1<br>2X2 PLUG ASSEMBLY, D KEY, CLAS | <br>TE Part # 184326-1<br>2X2 PLG ASY KEY H C4 NAT       | <br>TE Part # 184404-1<br>2X2 PLUG HSG, G KEY, CLASS 3,  |



|  |   |   |  |
|--|---|---|--|
|  <p>TE Part # 184250-1<br/>4P,2X2 PLUG ASSY W/O SLOT,KEYB</p> |  <p>TE Part # 184334-1<br/>2X2 CAP ASY KEY H C4 NAT</p>              |  <p>TE Part # 184030-3<br/>RECPT, CONTACT 070, PTPPHBZ</p>     |  <p>TE Part # 184355-2<br/>2X2 CAP ASSEMBLY, B KEY, GRAY,</p>         |
|  <p>TE Part # 184252-1<br/>2X2 PLG ASY KEY B W/RET C4</p>     |  <p>TE Part # 184330-1<br/>2X2 CAP ASY KEY F C4</p>                  |  <p>TE Part # 184140-1<br/>WIRE SEAL,RUBBER,SENSOR, ORANGE</p> |  <p>TE Part # 184400-1<br/>2X2 PLUG ASSY, G KEY, CLASS 3, ORANGE</p> |
|  <p>TE Part # 184030-1<br/>RECPT, CONTACT 070, AUPHBZ</p>   |  <p>TE Part # 184141-1<br/>WIRE SEAL,RUBBER,SENSOR,PURPLE, LIM</p> |  <p>TE Part # 184254-1<br/>2X2 CAP ASY KEY B C4</p>          |  <p>TE Part # 184322-1<br/>2X2 PLG ASY KEY F C4</p>                 |

Also in the Series | Sealed Sensor Connector SSC System

|   |   |  |  |
|---|---|--|--|
|  <p>Automotive Connector Caps &amp; Covers (2)</p> |  <p>Automotive Connector Locks &amp; Position Assurance(2)</p> |  <p>Automotive Housings(34)</p> |  <p>Automotive Terminals(5)</p> |
|  <p>Connector Seals &amp; Cavity Plugs(4)</p>      |  <p>Insertion &amp; Extraction Tools(1)</p>                    |  |  |

Customers Also Bought







TE Part #1393367-1  
V23540X7000Y 11=GET-FEM TERM S



TE Part #170003-5  
SHUR PLUG 156 REC 20-14 AWG TPBR



TE Part #170089-1  
FF 250 REC 14-12AWG BR



TE Part #1452203-1  
HYBRID CONNECTOR 6P



TE Part #2035363-4  
1X6 GENERATION Y ASSY KEYC CPA




TE Part #2-1618396-7  
EV200GAANA=RELAY, EV200 SPST-NO



TE Part #CV21364001  
RW-175-E-3/8-X-SP



TE Part #1-172134-1  
250 FASTON HSG, PLUG 4P NATURAL



TE Part #1-2280624-8  
COOL DOWN TIMER, 220 VAC



TE Part #1924484-1  
SSC 2x2 PLUG ASSY OPEN MASTER KEY BOSCH

Documents

Product Drawings

2X2 PLUG ASSEMBLY, B KEY, GRAY

English

CAD Files

Customer View Model

ENG\_CVM\_184393-2\_E.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_184393-2\_E.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_184393-2\_E.2d\_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Application Specification

English