


# Economy Power 2.5 TE Internal #: 1969588-3 Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5

#### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

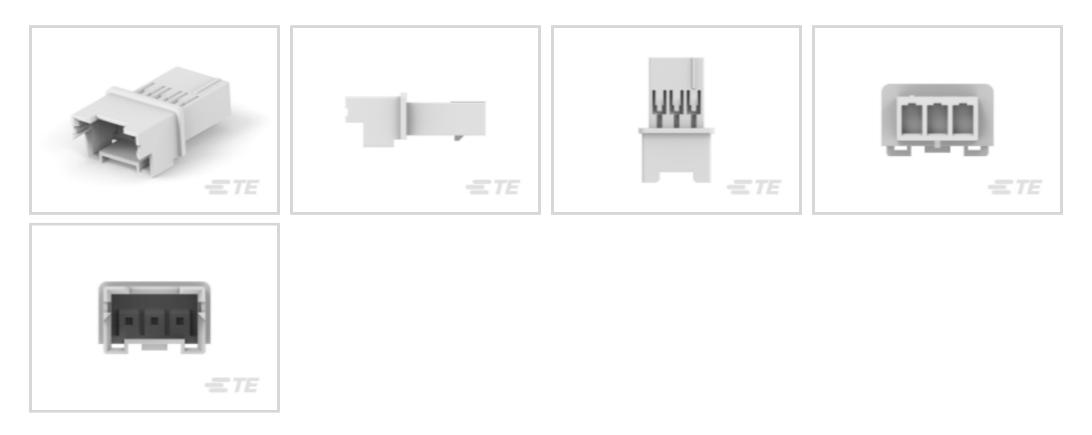

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Wire Number of Positions: 3

Centerline (Pitch): 2.5 mm [.098 in ]

# Features



# Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Natural
Contact Features	

Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5



Contact Base Material	Brass	
Contact Type	Pin	
Contact Current Rating (Max)	7.5 A	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Strain Relief	Without	
Panel Mount Feature	Without	
Mating Retention Type	Latch	
PCB Mount Retention	Without	
Mating Retention	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	Nylon GF	
Housing Entry Configuration	Both Ends Closed	
Centerline (Pitch)	2.5 mm[.098 in]	

## Dimensions

Connector Width	18.17 mm[.715 in]	
Compatible Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]	
Connector Height	6.6 mm[.26 in]	
Wire Size	26 – 22 AWG	
Connector Length	10 mm[.393 in]	
Usage Conditions		
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Glow Wire Rating	Standard Part - Not Glow Wire	
Packaging Features		
Packaging Method	Bag	
Packaging Quantity	500	

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5



# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not reviewed for solder process capability	

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5



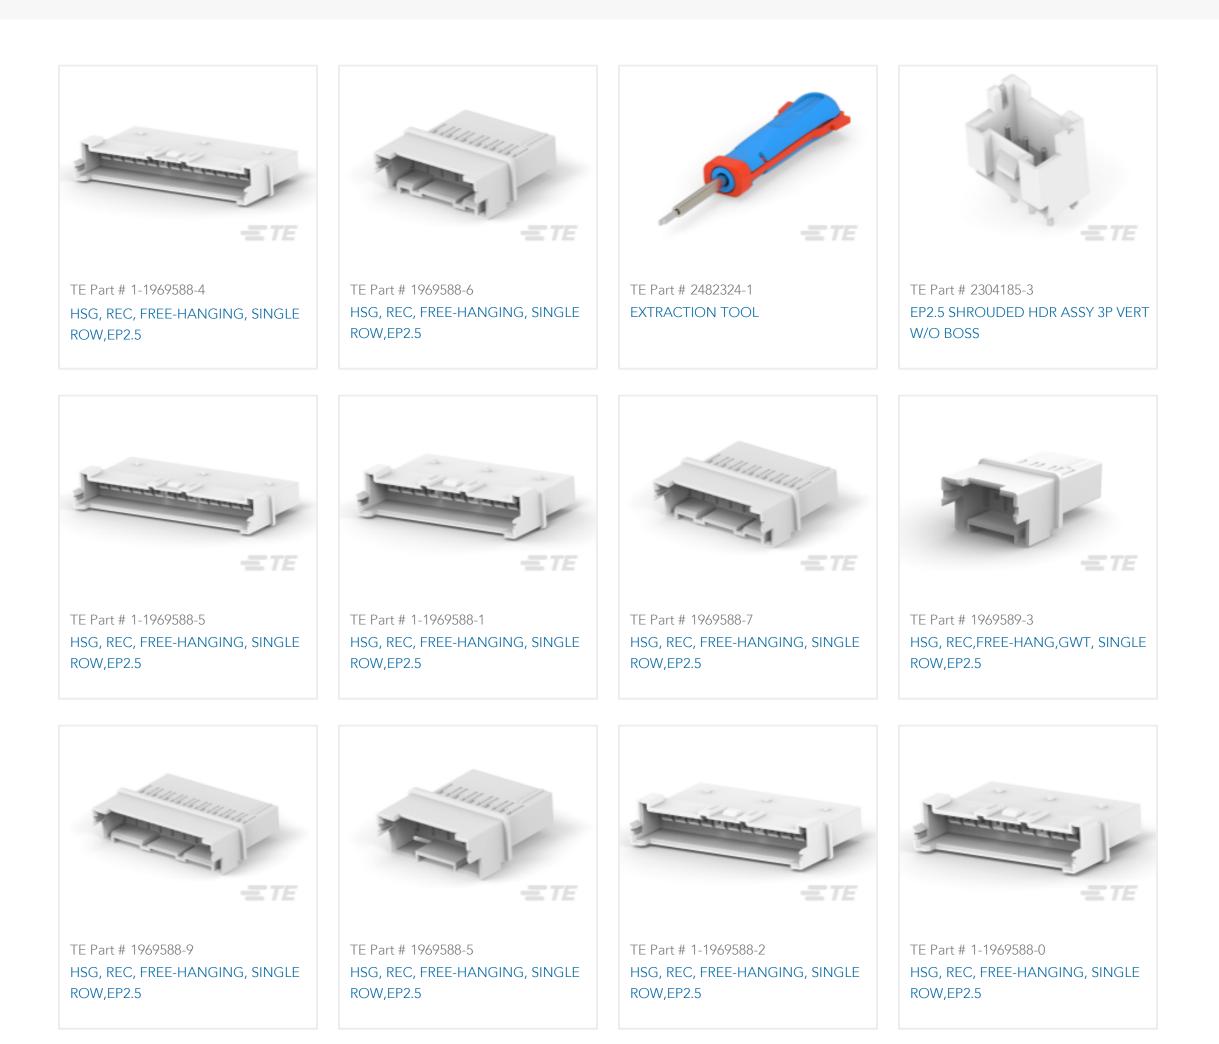




# Also in the Series | Economy Power 2.5




Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5



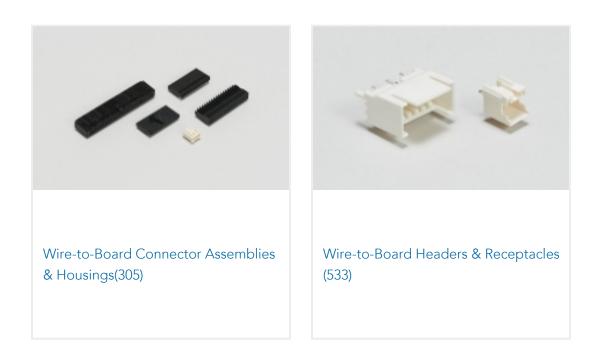

# **Customers Also Bought**

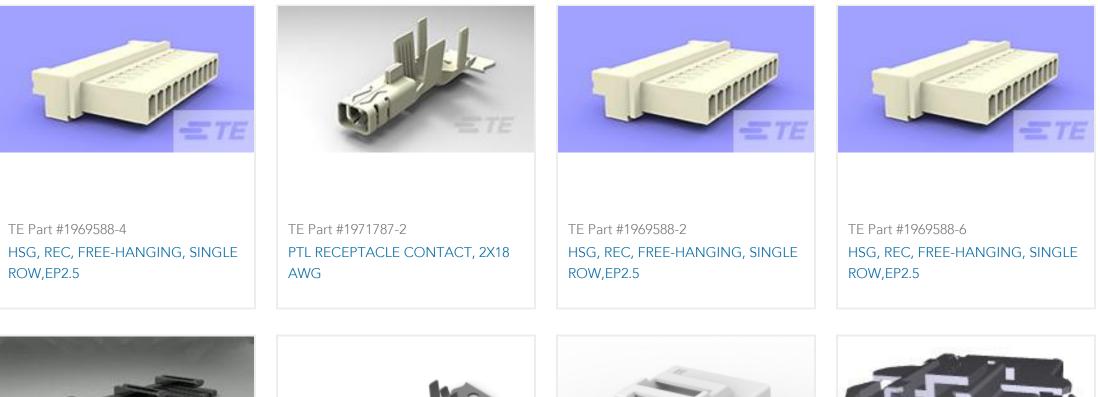



TE Part #1969443-2



TE Part #CAT-P87074-C1701



TE Part #316502-1

EP 2.5 TPA Retainer, 2 Pos	Tab Contact — POWER TRIPLE LOCK	Standard Temperature Caps   POWER	POWER D/LOCK CAP HSG 4P NATU.
		TRIPLE LOCK	

# Documents

Product Drawings

# HSG, REC, FREE-HANGING, SINGLE ROW, EP2.5

English

# CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1969588-3\_B.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1969588-3\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1969588-3\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 3 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Wire & Cable, Power & Signal, Economy Power 2.5



Product Specifications Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals VDE Certificate

English