



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**
Connector & Housing Type: **Receptacle**
Number of Positions: **1**
Terminal Orientation: **Flag**
UL Flammability Rating: **UL 94V-0**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Flag
Contact Mating Retention	Without

Mechanical Attachment

Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)



Housing Features

Housing Material	Nylon
------------------	-------

Usage Conditions

Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>


















EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

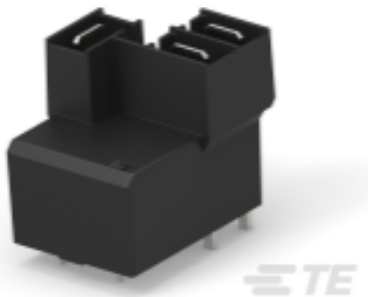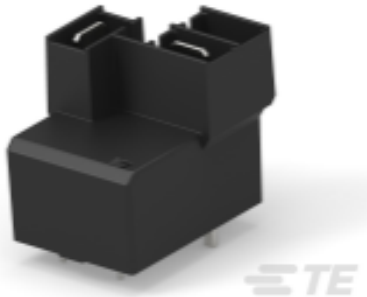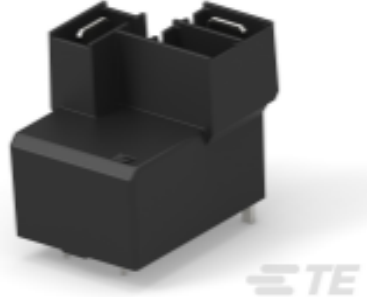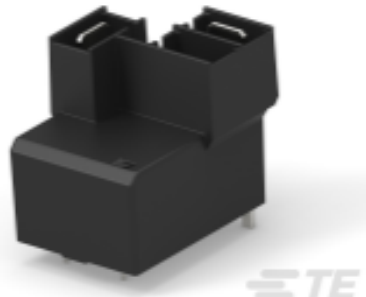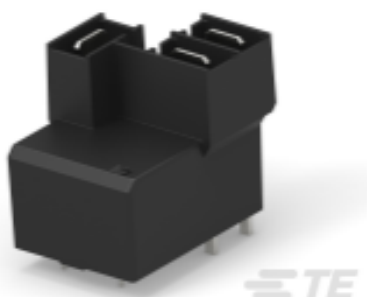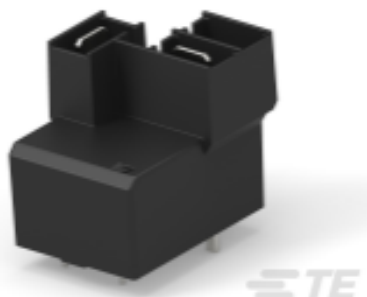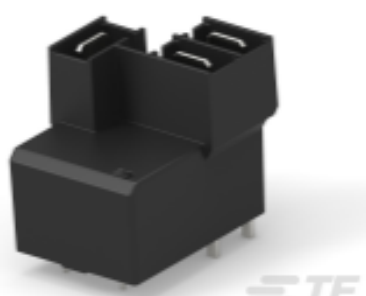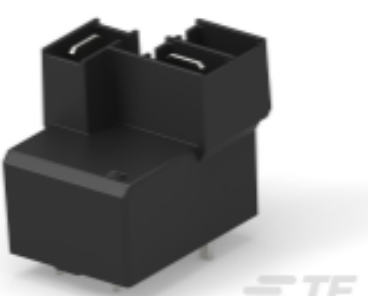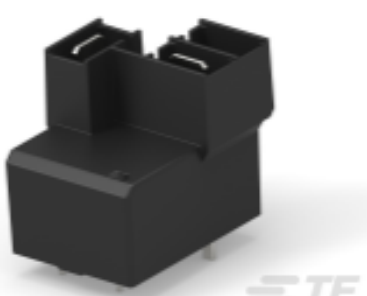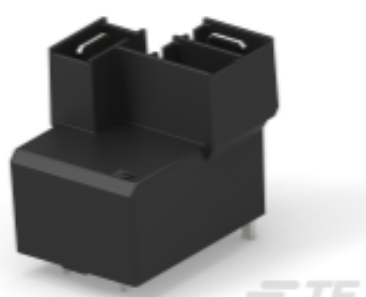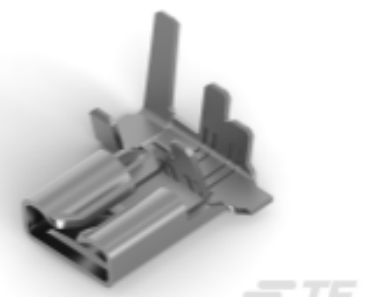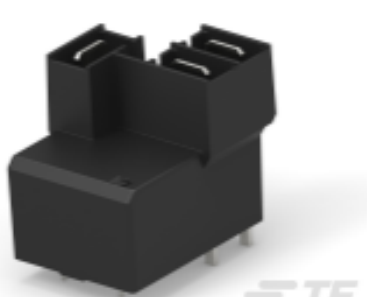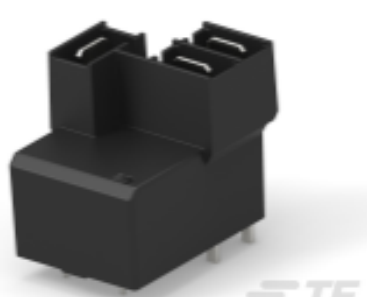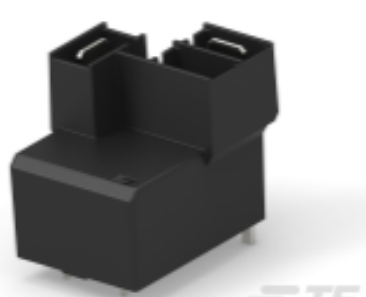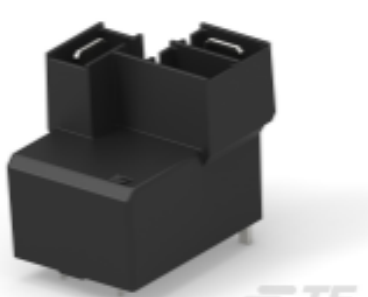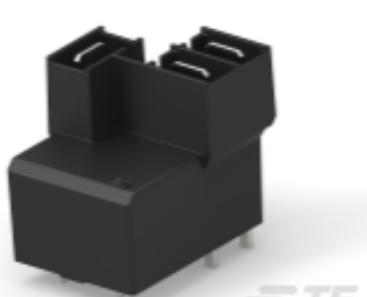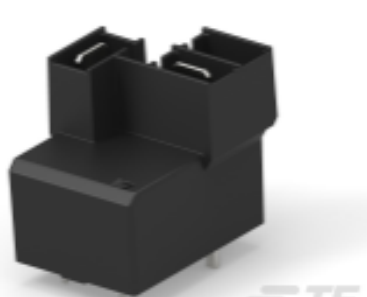


 TE Part # 1-1558676-2 T9GS1L24-9WG	 TE Part # 1-1558670-5 T9GV5L24-18WG	 TE Part # 1-1558671-8 T9GV1L24-48WG	 TE Part # 1-1558672-1 T9GV2L24-5WG
 TE Part # 1-1558672-2 T9GV2L24-9WG	 TE Part # 1-1558677-2 T9GS2L24-9WG	 TE Part # 1-1558670-7 T9GV5L24-24WG	 TE Part # 1-1558671-5 T9GV1L24-18WG
 TE Part # 1-1558675-6 T9GS5L24-22WG	 TE Part # 1-1558676-5 T9GS1L24-18WG	 TE Part # 1-1558676-8 T9GS1L24-48WG	 TE Part # 1-1558676-9 T9GS1L24-110WG
 TE Part # 1-1558672-5 T9GV2L24-18WG	 TE Part # 2238171-3 250 FASTON,FLAG,REC.,22-12 AWG, TPBR	 TE Part # 1-1558670-1 T9GV5L24-5WG	 TE Part # 1-1558675-3 T9GS5L24-12WG
 TE Part # 1-1558677-4 T9GS2L24-15WG	 TE Part # 1-1558677-6 T9GS2L24-22WG	 TE Part # 1-1558675-7 T9GS5L24-24WG	 TE Part # 1-1558671-2 T9GV1L24-9WG

Also in the Series | **FASTON 250**



Compression Connectors(4)

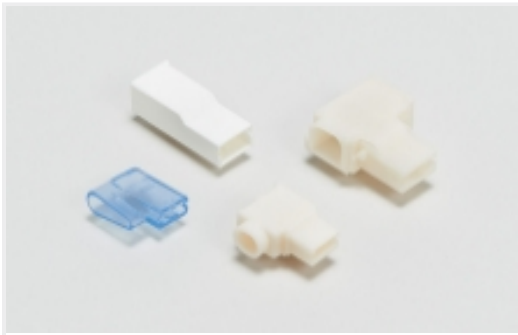


Crimp Terminal Housings(116)



Insertion & Extraction Tools(6)



Insulation Boots & Sleeves(16)

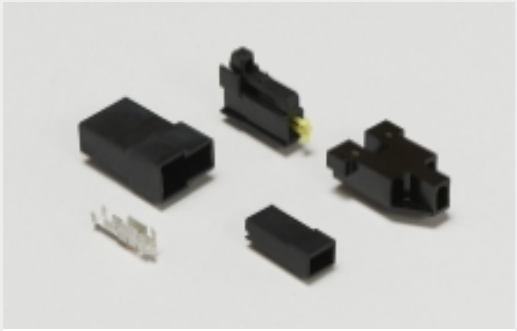

Magnet Wire Terminals(1)



PCB Terminals(134)



Quick Disconnects(421)



Splices(4)


Customers Also Bought



TE Part #1971783-2
PTL RECEPTACLE CONTACT, 16-19 AWG, 2X22



TE Part #CAT-P87074-C1701A
POWER TRIPLE LOCK High Temperature Caps

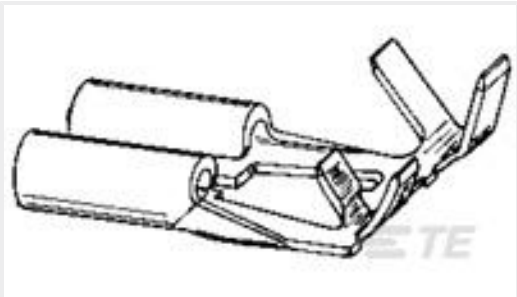

TE Part #280428-4
FF 250 REC 0.5-1.5MM2 BR




TE Part #1376396-1
5MM POWER KEY D/L PLATE GREEN



TE Part #647662-1
EP CONN CONT LUBRICANT SPCL




TE Part #5-1971776-3
PTL 2X3 PLUG HSG HIGH TEMP KEY A LGR

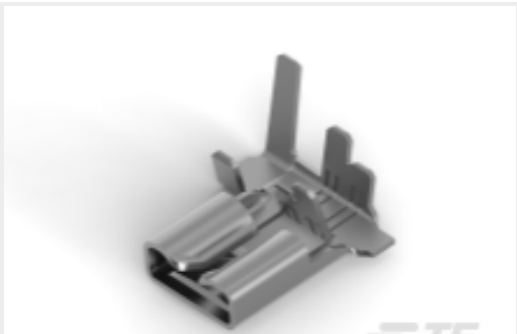

TE Part #2238171-3
250 FASTON,FLAG,REC.,22-12 AWG, TPBR



TE Part #63010-1
250 FASTON FLAG REC 18-14 AWG TPBR

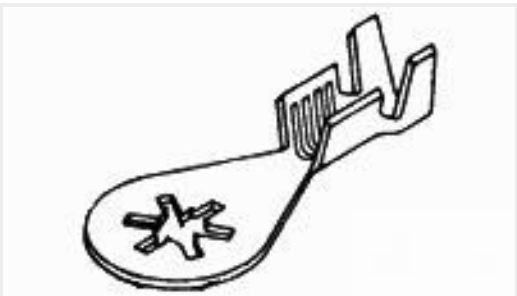

TE Part #63482-1
RING 18-14 AWG TPSTL

Documents



Product Drawings

250 FASTON HSG.,FLAG,REC.,1 POS,BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1969657-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1969657-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1969657-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

PB 30A PCB Relay T9G Series

English

Introductory Flyer - High Temperature FASTON Housings

English

Agency Approvals

UL Report

English