1SET411009R0000 - ACTIVE


ENTRELEC

TE Internal #: 1SET411009R0000 Wiring Duct, PVC, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [.984 in] Width, -5 – 60 °C [23 – 140 °F]

View on TE.com >



Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers > PVC Wiring Duct: 2 meters, Gray Color, Flame-Retardant

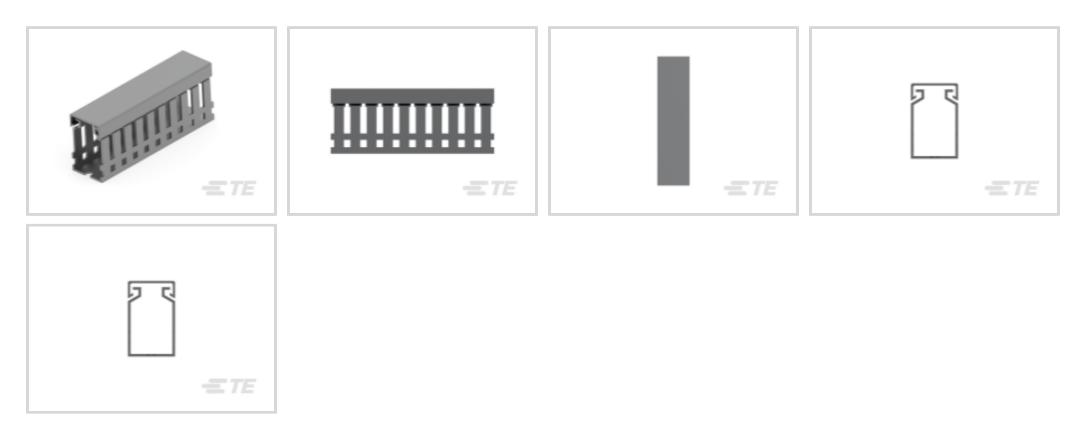

Wiring Duct Product Type: Wiring Duct

Primary Product Material: PVC

Product Height: 40 mm [1.575 in]

Product Length: 2000 mm [78.74 in]

Product Width: 25 mm [.984 in]

All PVC Wiring Duct: 2 meters, Gray Color, Flame-Retardant (23)

Features

Product Type Features

| Wiring Duct Product Type | Wiring Duct |
|-----------------------------|-------------------------|
| Body Features | |
| Primary Product Color | Gray |
| Primary Product Material | PVC |
| Dimensions | |
| Product Height | 40 mm[1.575 in] |
| Product Length | 2000 mm[78.74 in] |
| Product Width | 25 mm[.984 in] |
| Usage Conditions | |
| Operating Temperature Range | -5 – 60 °C[23 – 140 °F] |
| Packaging Features | |
| Packaging Quantity | 50 |

1SET411009R0000

Wiring Duct, PVC, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [.984 in] Width, -5 – 60 °C [23 – 140 °F]



Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|--|
| EU ELV Directive 2000/53/EC | Out of Scope |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Not reviewed for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

1SET411009R0000

Wiring Duct, PVC, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [.984 in] Width, -5 – 60 °C [23 – 140 °F]





Documents

Product Drawings WD-1-DP-GR2540

French

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET411009R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411009R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411009R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages Infographic - entrelec ews-linecard

English

Datasheet - Entrelec Electrical-Solutions

Datasheet - ENTRELEC-wiring-duct-DS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals Agency Approval Document English

C For support call+1 800 522 6752

1SET411009R0000

Wiring Duct, PVC, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [.984 in] Width, -5 – 60 °C [23 – 140 °F]

