1SET411102R0000 - ACTIVE


ENTRELEC

TE Internal #: 1SET411102R0000 Wiring Duct, PC-ABS, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [.984 in] Width, -25 – 90 °C [-13 – 194 °F]

View on TE.com >

Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers >

Wiring Duct: PC-ABS Material, Gray, 2 meters, Flame-Retardant

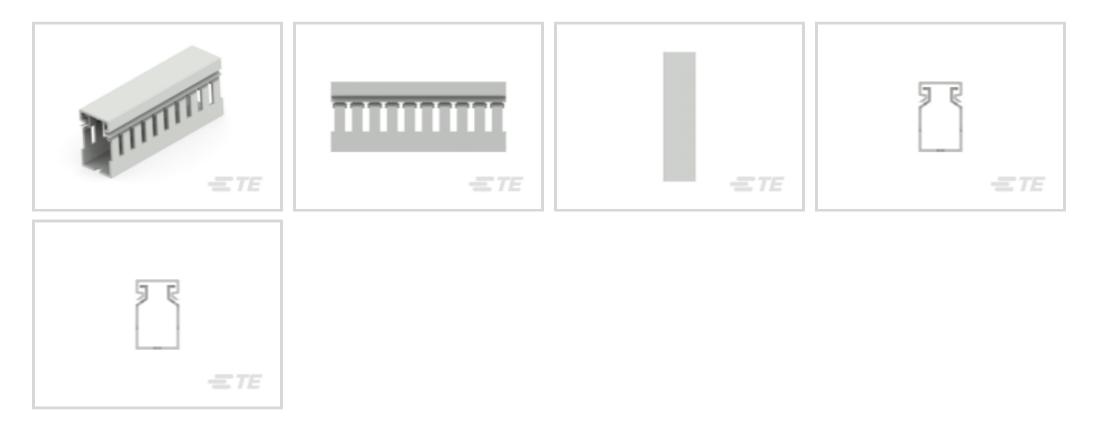

Wiring Duct Product Type: Wiring Duct

Primary Product Material: PC-ABS

Product Height: 40 mm [1.575 in]

Product Length: 2000 mm [78.74 in]

Product Width: 25 mm [.984 in]

All Wiring Duct: PC-ABS Material, Gray, 2 meters, Flame-Retardant (11)



Features

Product Type Features

Wiring Duct Product Type	Wiring Duct
Body Features	
Primary Product Color	Gray
Primary Product Material	PC-ABS
Dimensions	
Product Height	40 mm[1.575 in]
Product Length	2000 mm[78.74 in]
Product Width	25 mm[.984 in]
Usage Conditions	
Operating Temperature Range	-25 – 90 °C[-13 – 194 °F]
Packaging Features	
Packaging Quantity	50

C For support call+1 800 522 6752

1SET411102R0000

Wiring Duct, PC-ABS, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [. 984 in] Width, -25 – 90 °C [-13 – 194 °F]



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Soldar Process Capability	Not reviewed for colder process capability

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Customers Also Bought

1SET411102R0000

Wiring Duct, PC-ABS, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [. 984 in] Width, -25 – 90 °C [-13 – 194 °F]



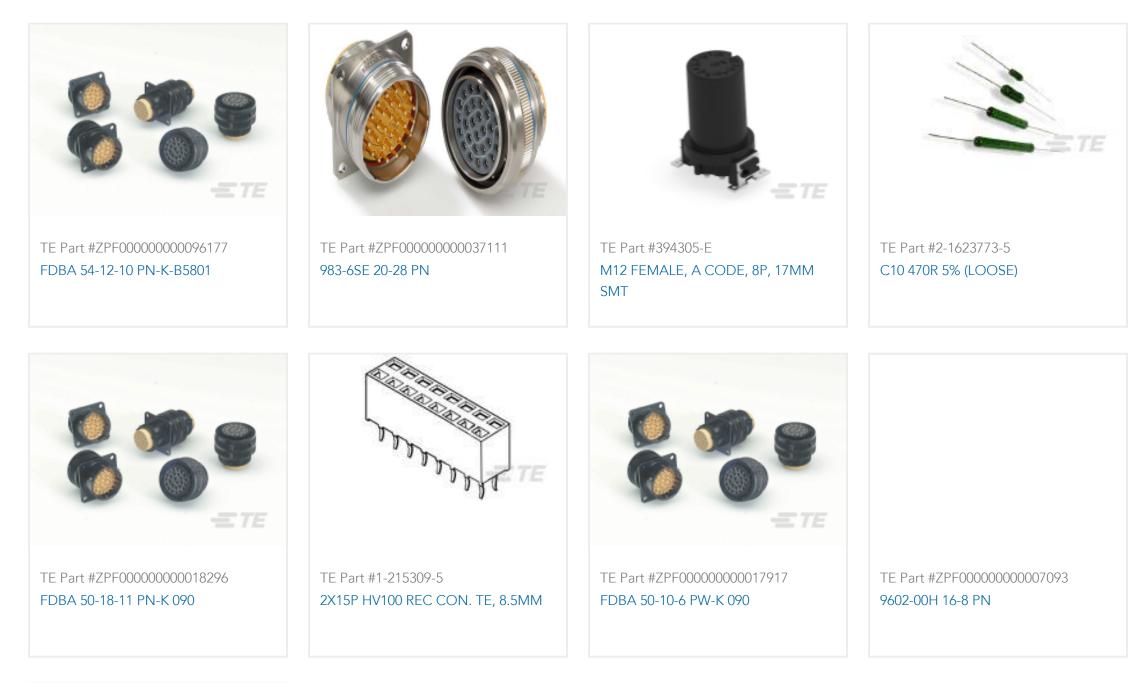



TE Part #CAT-Z62-W1-DH Wiring Duct: PC-ABS Material, Gray, 2 meters, Flame-Retardant

Documents

Product Drawings

WD-1-DH-GR2540

French

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET411102R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411102R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411102R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

1SET411102R0000

Wiring Duct, PC-ABS, 40 mm [1.575 in] Height, 2000 mm [78.74 in] Length, 25 mm [. 984 in] Width, -25 – 90 °C [-13 – 194 °F]



Infographic - entrelec ews-linecard

English

Datasheet - Entrelec Electrical-Solutions

Datasheet - ENTRELEC-wiring-duct-DS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals Agency Approval Document English Agency Approval Document

English