1SET411251R0000 - ACTIVE

ENTRELEC

TE Internal #: 1SET411251R0000 Wiring Duct Cover, PC-ABS, 11.76 mm [.463 in] Height, 2000 mm [78.74 in] Length, 40 mm [1.575 in] Width, -25 – 90 °C [-13 – 194 °F] View on TE.com >



Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers >

Wiring Duct Covers: Gray, Low Smoke, Halogen Free, 2 meters



Wiring Duct Product Type: Wiring Duct Cover

Primary Product Material: PC-ABS

Product Height: 11.76 mm [.463 in]

Product Length: 2000 mm [78.74 in]

Product Width: 40 mm [1.575 in]

All Wiring Duct Covers: Gray, Low Smoke, Halogen Free, 2 meters (4)

Features

Product Type Features

Wiring Duct Product Type	Wiring Duct Cover
Body Features	
Primary Product Color	Gray
Primary Product Material	PC-ABS
Dimensions	
Product Height	11.76 mm[.463 in]
Product Length	2000 mm[78.74 in]
Product Width	40 mm[1.575 in]
Usage Conditions	
Operating Temperature Range	-25 – 90 °C[-13 – 194 °F]
Packaging Features	
Packaging Quantity	6

C For support call+1 800 522 6752

1SET411251R0000

Wiring Duct Cover, PC-ABS, 11.76 mm [.463 in] Height, 2000 mm [78.74 in] Length, 40 mm [1.575 in] Width, -25 – 90 °C [-13 – 194 °F]



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Soldar Process Capability	Not reviewed for colder process capability

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Customers Also Bought

1SET411251R0000

Wiring Duct Cover, PC-ABS, 11.76 mm [.463 in] Height, 2000 mm [78.74 in] Length, 40 mm [1.575 in] Width, -25 – 90 °C [-13 – 194 °F]



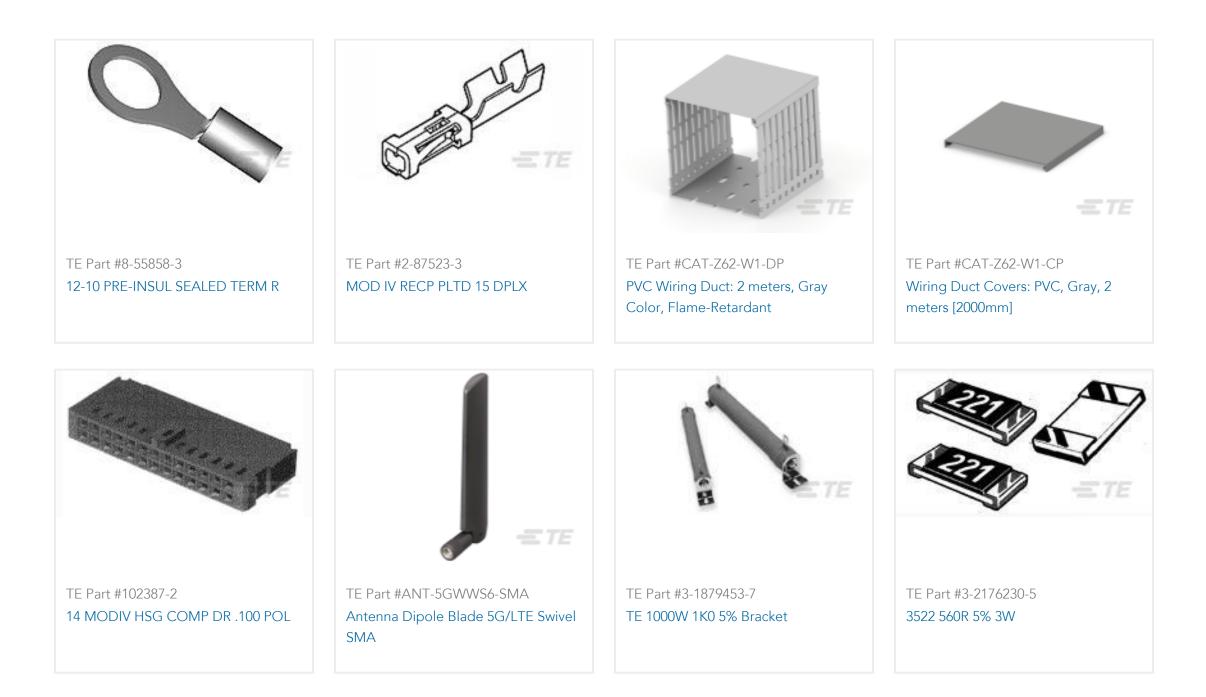

Documents

Product Drawings WD-1-CH-GR040

French

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1SET411251R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411251R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411251R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Infographic - entrelec ews-linecard

English

Datasheet - Entrelec Electrical-Solutions

Datasheet - ENTRELEC-wiring-duct-DS

English

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

C For support call+1 800 522 6752

1SET411251R0000

Wiring Duct Cover, PC-ABS, 11.76 mm [.463 in] Height, 2000 mm [78.74 in] Length, 40 mm [1.575 in] Width, -25 – 90 °C [-13 – 194 °F]



English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals

Agency Approval Document

English

Agency Approval Document

English