




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

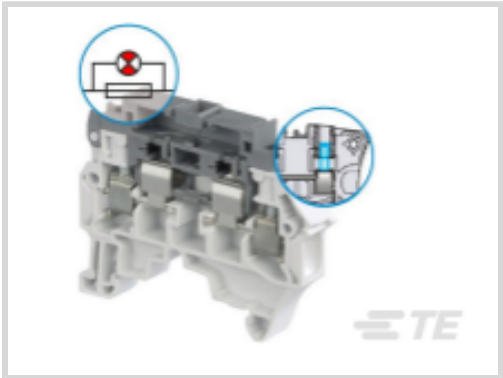

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Block Function: **Fuse**

Primary Product Color: **Gray & Dark Gray**

Product Spacing: **8 mm [.315 in]**

Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Number of Levels	1
Gauge Type	A3-B3
Number of Circuits	1
Block Function	Fuse
Number of Positions	2

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	6.3 A
Current Rating (UL)	10 A
Current Rating (CSA)	6.3 A
Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	630 V
Voltage Rating (CSA)	300 V

Body Features

--



Product Weight	13.3 g[.524 oz]
Primary Product Color	Gray & Dark Gray

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Product Depth	45.6 mm
Tool Size	3.5 mm[.138 in]
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	24 – 14 AWG
Main Circuit Capacity - Twin Ferrule per Screw Clamp	24 – 14 AWG
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	24 – 14 AWG
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 – 10 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.22 – 4 mm ²
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	.22 – 4 mm ²
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	24 – 10 AWG
Product Length	45.6 mm[1.8 in]
Product Height	59.7 mm
Product Spacing	8 mm[.315 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 1SNA107239R0300 FC2.MC	 TE Part # 1SNA168674R1300 TGA8	 TE Part # 1SNA168673R1200 TGA8	 TE Part # 1SNA167547R2300 FU525
 TE Part # 1SNA174300R1700 PR3.Z2	 TE Part # 1SNA008289R1600 FU520	 TE Part # 1SNA008292R0100 FU520	 TE Part # 1SNA008288R1500 FU520



TE Part # 1SNA167546R2200
FU525



TE Part # 1SNA167549R0500
FU525

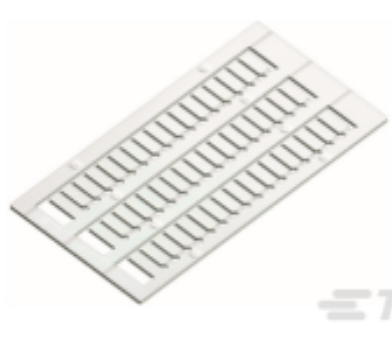


TE Part # 1SNK160000R0000
MC812




TE Part # 1SNA008291R0000
FU520



TE Part # 1SNK900001R0000
BAM4

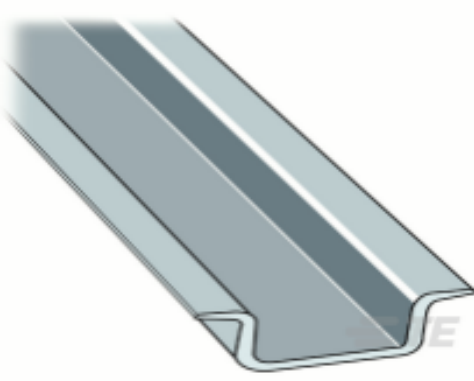

TE Part # 1SNA168500R1200
PR4

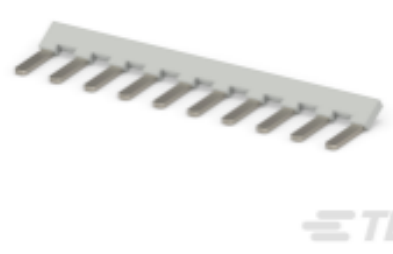


TE Part # 1SNA173523R1100
PC81-10



TE Part # 1SNK900613R0000
PROCAP8




TE Part # 1SNK508960R0000
ES4-SF

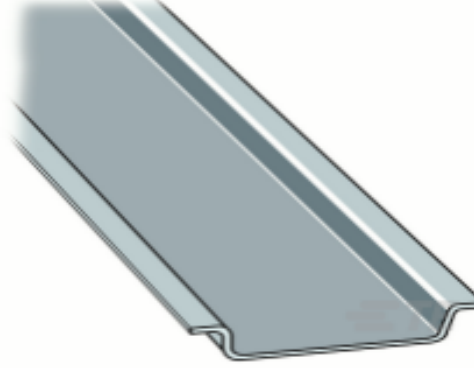

TE Part # 1SNA164800R0300
PR3.G2




TE Part # 1SNK900624R0000
KCO

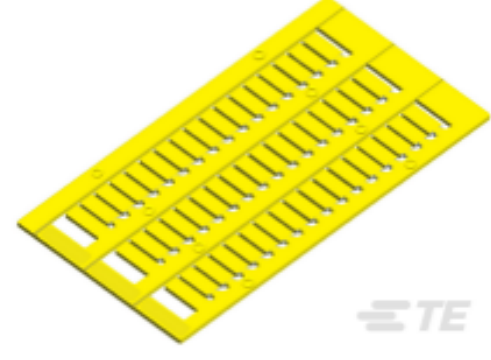

TE Part # 1SNK160004R0000
MC812-YL


Also in the Series | **ENTRELEC SNK**

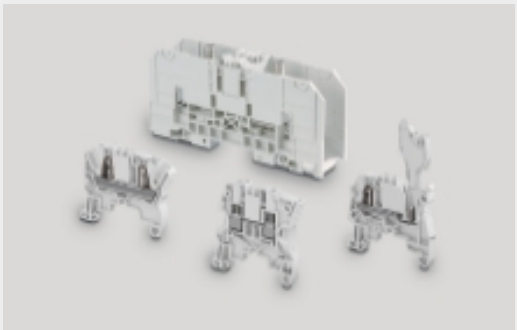

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting
Accessories(67)

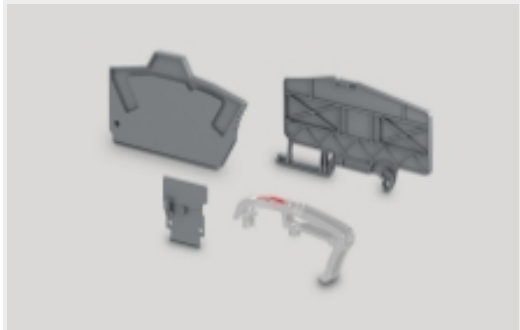

Terminal Block & Strip Insulating
Accessories(31)

Customers Also Bought



TE Part #2348536003
LSTT-R-25.4-0



TE Part #1825910-2
FSM2JH=6MM TACT SWITCH, HIGH
TEMP



TE Part #292303-9
Std USB Type A, R/A, SMT, Offset,
Natural



TE Part #5747840-4
HD-20 PLUG RA .318 FMS BD-LK 4

1SNK508415R0000

Screw Clamp Terminal Block, Fuse, Gray & Dark Gray, 8 mm [.315 in] Spacing, 2 Position, DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK





TE Part #CSH-SGFB-100-UFFR
[SMA to U.FL/MHF1 100mm 1.32 OD](#)




TE Part #2065126034
[HFT5000-20/10-0-115MM](#)



TE Part #1437566-3
[FSMSM=3.5X6 SMT TACT](#)



TE Part #1SNA114533R0000
[EBS8A.G](#)

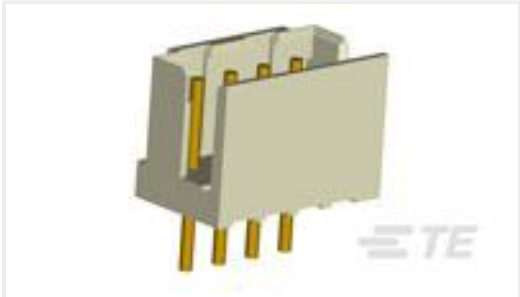

TE Part #292132-2
[CT P/HDR BOX V 2P NAT](#)



TE Part #6-1419111-9
[PT370730](#)

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1SNK508415R0000_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK508415R0000_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK508415R0000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ZS4-SF1-R4

English

[ENTRELEC Terminal Block - Master Catalog](#)

[ENTRELEC Terminal Block - Master Catalog](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)

Agency Approvals

[CE Declaration of Conformity](#)

1SNK508415R0000

Screw Clamp Terminal Block, Fuse, Gray & Dark Gray, 8 mm [.315 in] Spacing, 2
Position, DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



English