



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Block Function: **Feed-Through**

Primary Product Color: **Gray**

Product Spacing: **5.2 mm [.205 in]**

Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Number of Levels	1
Gauge Type	A2 / 2.3 mm Dia.
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Power Loss	.8 W
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	24 A
Current Rating (UL)	20 A
Current Rating (CSA)	20 A



Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	1000 V
Voltage Rating (CSA)	600 V
Short-Time Withstanding Current Rating @ 1s	300 A
Operating Voltage	600 VAC

Body Features

Product Weight	5.5 g[.217 oz]
Primary Product Color	Gray

Termination Features

Termination Method to Wire & Cable	Spring Terminal
------------------------------------	-----------------

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Spring Clamp	26 – 20 AWG
Product Depth	40.2 mm[1.583 in]
Tool Size	3.5 mm[.138 in]
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	26 – 12 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm ²
Product Length	40.2 mm[1.583 in]
Product Height	50.9 mm[2.004 in]
Product Spacing	5.2 mm[.205 in]
Wire Size	12 AWG

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]



Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>






EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

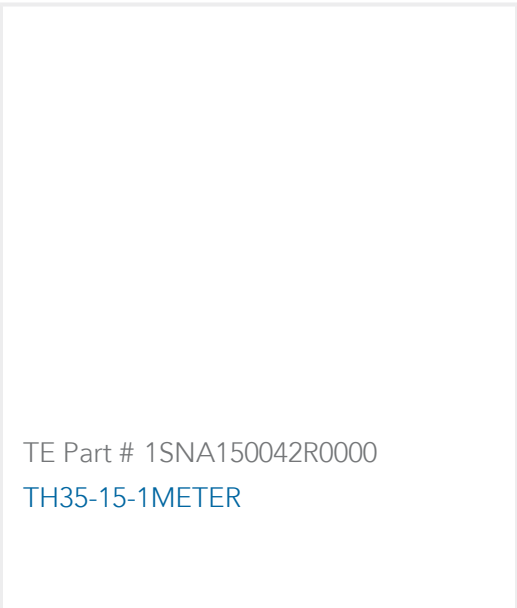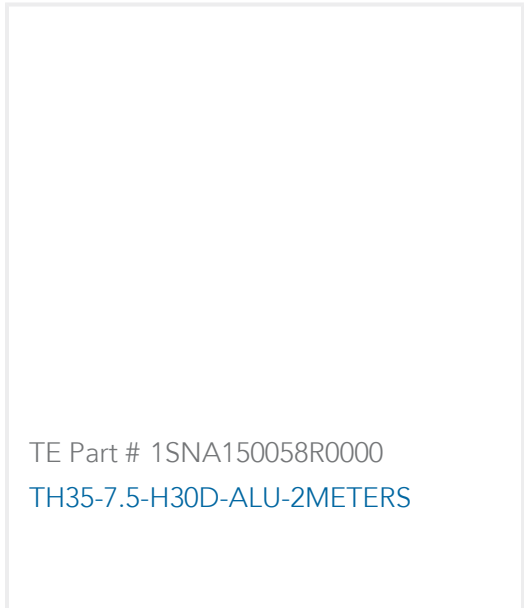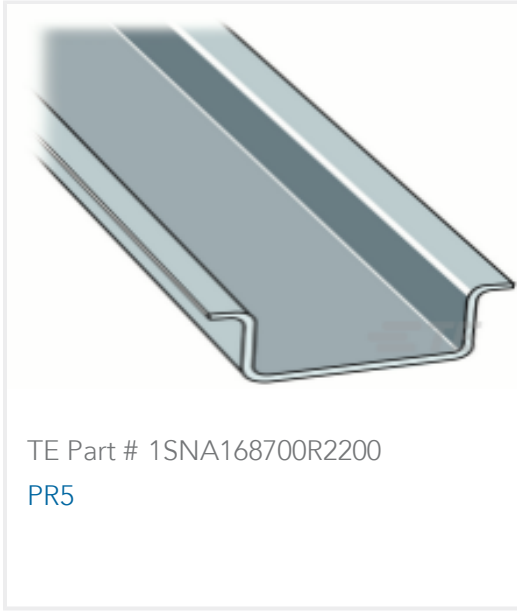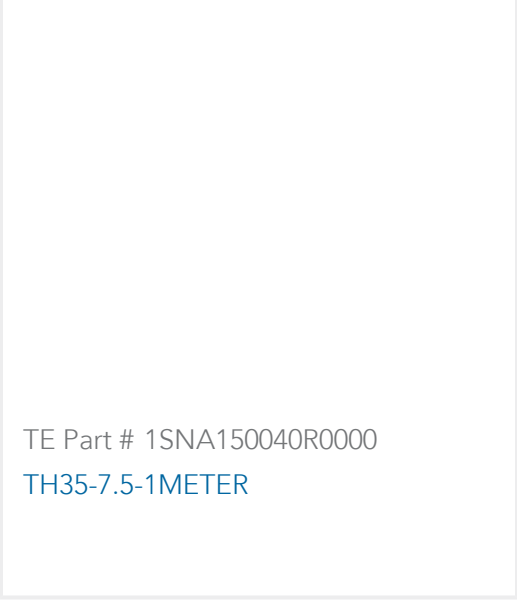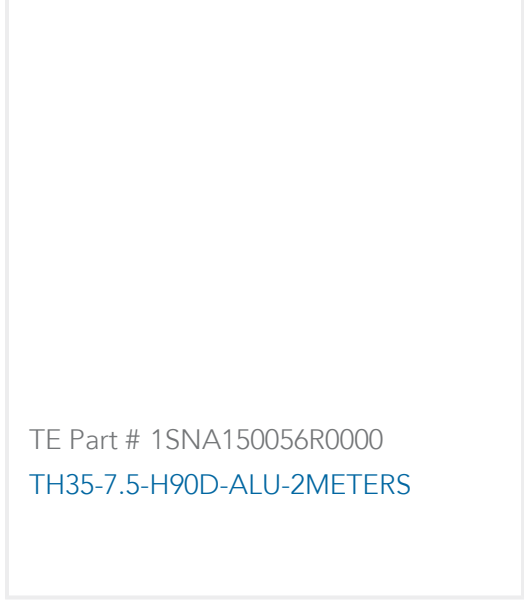

 TE Part # 1SNA150042R0000 TH35-15-1METER	 TE Part # 1SNK900102R0000 BAZH1	 TE Part # 1SNA164800R0300 PR3.G2	 TE Part # 1SNA150058R0000 TH35-7.5-H30D-ALU-2METERS
 TE Part # 1SNK900644R0000 TO3.5-75-INS	 TE Part # 1SNK900106R0000 CS-R2	 TE Part # 1SNA168700R2200 PR5	 TE Part # 1SNK900205R0000 TP4
 TE Part # 1SNK900606R0000 LH-J	 TE Part # 1SNK900603R0000 JB85-3	 TE Part # 1SNK140000R0000 MC512	 TE Part # 1SNK905303R0000 JB5-3
 TE Part # 1SNA178529R0400 PR50	 TE Part # 1SNK900203R0000 TP2	 TE Part # 1SNK900403R0000 PG5-R2	 TE Part # 1SNK900659R0000 TO3.5-50-A
 TE Part # 1SNA150040R0000 TH35-7.5-1METER	 TE Part # 1SNK905302R0000 JB5-2	 TE Part # 1SNA174300R1700 PR3.Z2	 TE Part # 1SNA150056R0000 TH35-7.5-H90D-ALU-2METERS


Also in the Series | **ENTRELEC SNK**

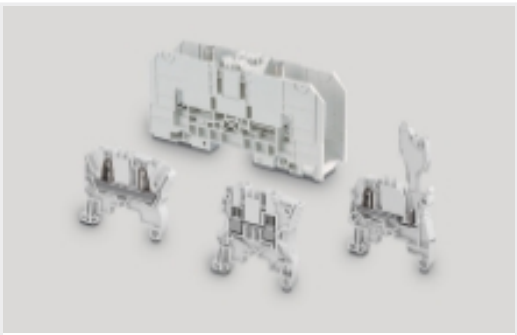

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)

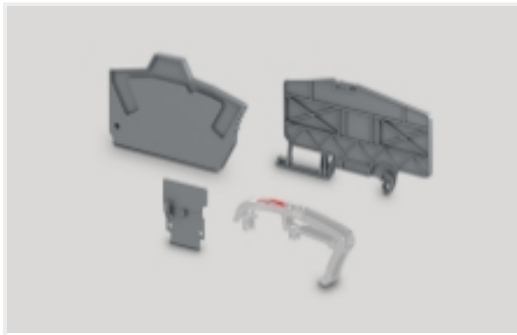

Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought




TE Part #1SNK900002R0000
BAZ1



TE Part #1SNK912305R0000
JB12-5



TE Part #1SNK705020R0000
ZK2.5-BL

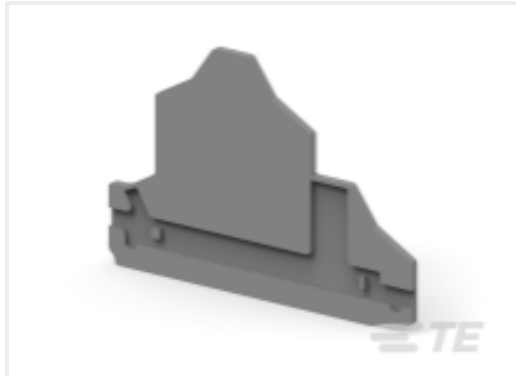

TE Part #1SNK705960R0000
EK2.5-D2




TE Part #1SNK705066R0000
ZK2.5-BK



TE Part #1SNK905302R0000
JB5-2



TE Part #1SNK705030R0000
ZK2.5-OR

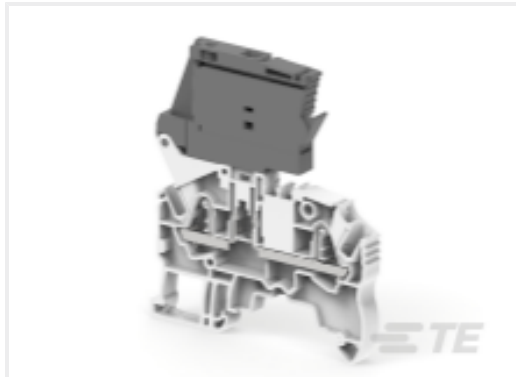

TE Part #1SNK706410R0000
ZK2.5-SF



TE Part #1SNK706012R0000
ZK4-4P



TE Part #1SNK705310R0000
ZK2.5-S

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705010R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705010R0000_A.3d_igs.zip

1SNK705010R0000

PI-Spring Terminal Block, Feed-Through, Gray, 5.2 mm [.205 in] Spacing, 2 Position, Spring Terminal, Power & Signal, DIN Rail, 600 VAC, ENTRELEC SNK



English

Customer View Model

ENG_CVM_CVM_1SNK705010R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Datasheet - Ev-Charging Electrical

English

ZK2.5

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals

Bureau Veritas Marine and Offshore Certificate

English