




Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

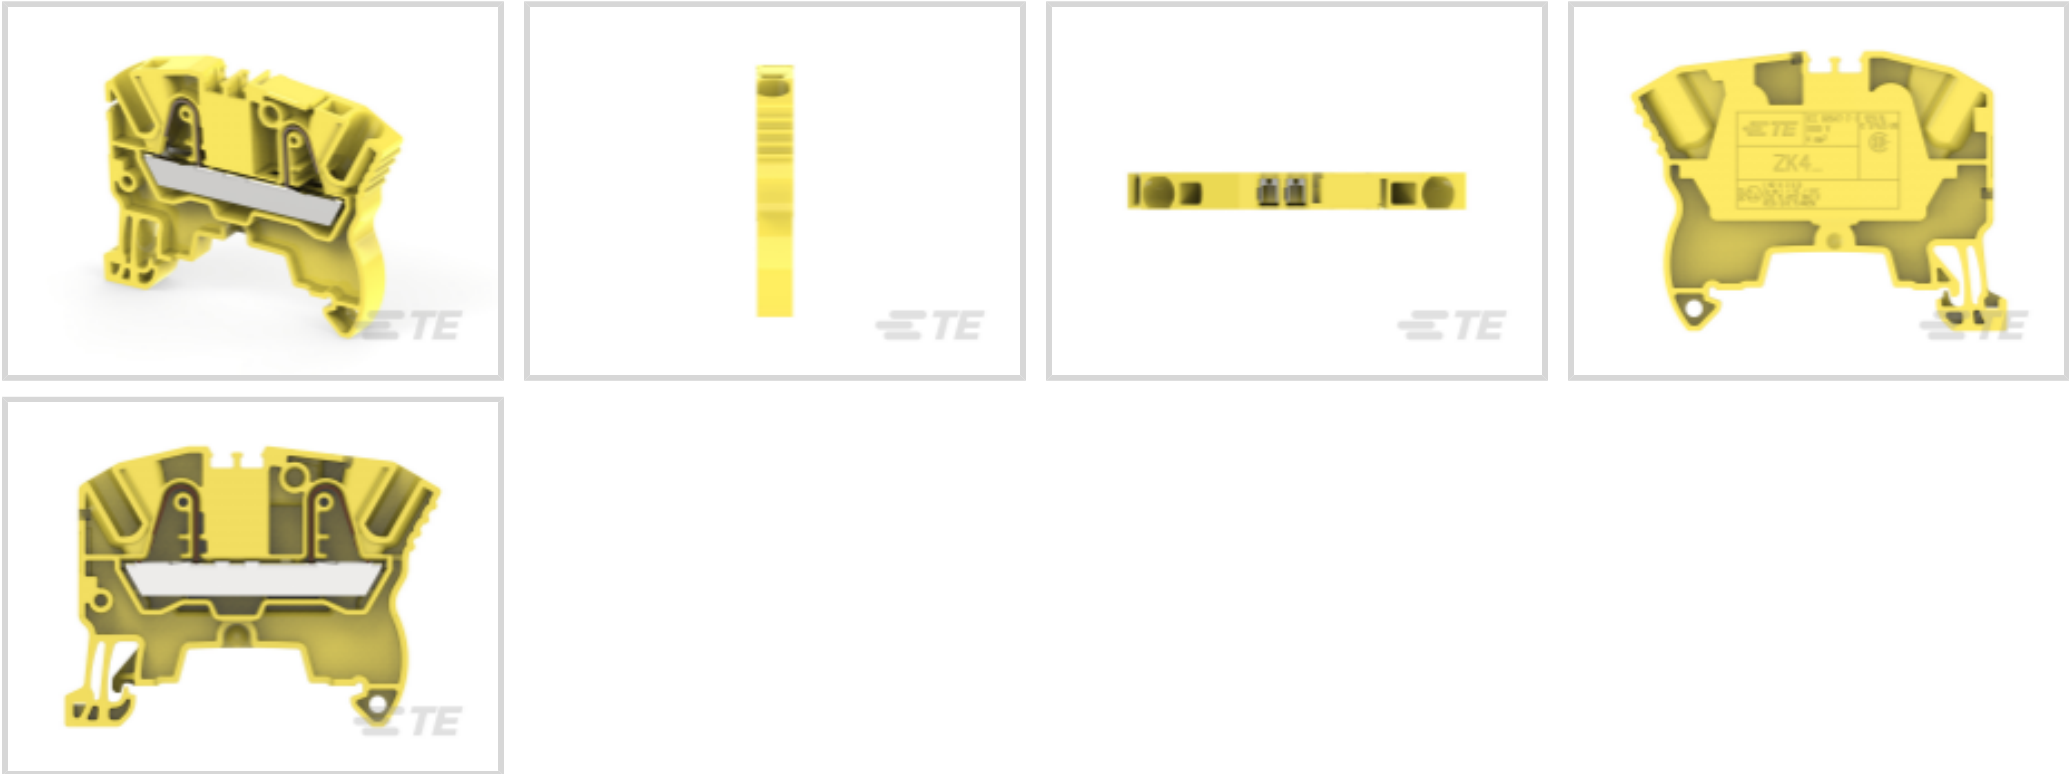

Modular Terminal Block Product Type: **PI-Spring Terminal Block**

Block Function: **Feed-Through**

Primary Product Color: **Yellow**

Product Spacing: **6 mm [.236 in]**

Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Number of Levels	1
Gauge Type	2.9 mm Dia.
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

Electrical Characteristics

Power Loss	1 W
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	32 A
Current Rating (UL)	30 A
Current Rating (CSA)	30 A



Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	1000 V
Voltage Rating (CSA)	600 V
Short-Time Withstanding Current Rating @ 1s	480 A

Body Features

Product Weight	7.9 g[.311 oz]
Primary Product Color	Yellow

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Spring Clamp	26 – 18 AWG
Product Depth	41.1 mm
Tool Size	3.5 mm[.138 in]
Wire Stripping Length	12.5 mm[.492 in]
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	26 – 10 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	26 – 12 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 12 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.5 – 4 mm²
Product Length	41.1 mm
Product Height	55.3 mm
Product Spacing	6 mm[.236 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNK900002R0000
BAZ1




TE Part # 1SNK900107R0000
CS-R3



TE Part # 1SNK900103R0000
CS-R1




TE Part # 1SNK900611R0000
UMH

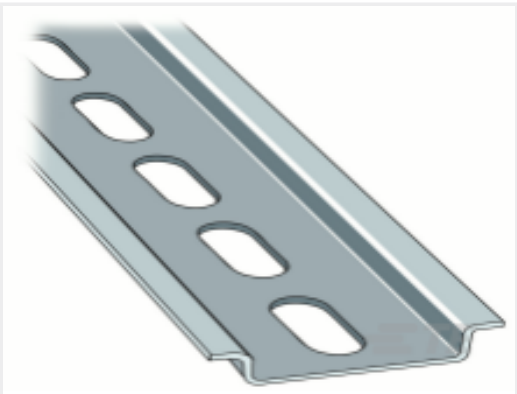

TE Part # 1SNA173220R0500
[PR30](#)



TE Part # 1SNK900102R0000
[BAZH1](#)

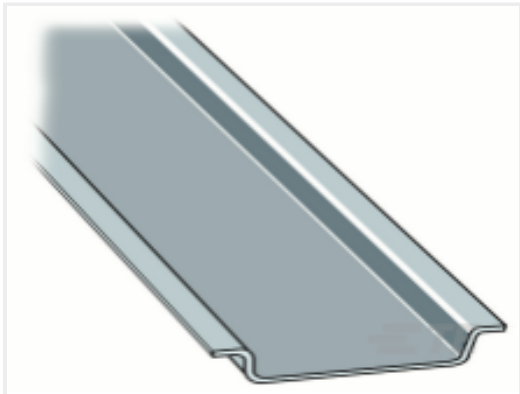


TE Part # 1SNA164800R0300
[PR3.G2](#)



TE Part # 1SNK900106R0000
[CS-R2](#)



TE Part # 1SNK906302R0000
[JB6-2](#)

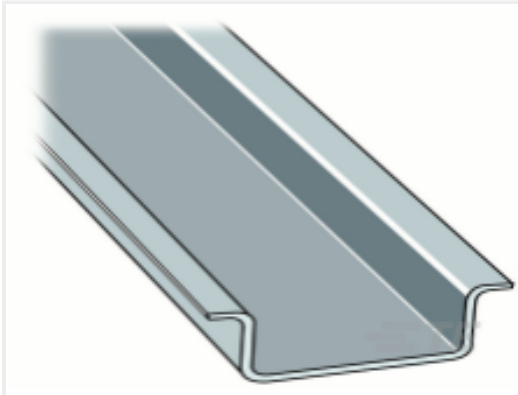

TE Part # 1SNA168700R2200
[PR5](#)



TE Part # 1SNK900205R0000
[TP4](#)



TE Part # 1SNK906304R0000
[JB6-4](#)



TE Part # 1SNK900603R0000
[JB85-3](#)



TE Part # 1SNK149999R0000
[MC512PA](#)



TE Part # 1SNK900001R0000
[BAM4](#)



TE Part # 1SNK900609R0000
[PROCAP5](#)




TE Part # 1SNK906350R0000
[JB6-50](#)



TE Part # 1SNK705910R0000
[EK2.5](#)




TE Part # 1SNK900612R0000
[PROCAP6](#)

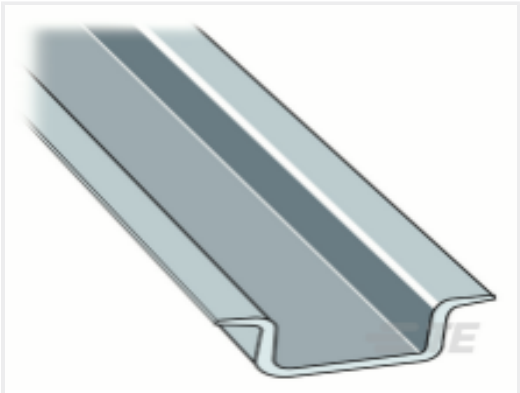

TE Part # 1SNA168500R1200
[PR4](#)


Also in the Series | **ENTRELEC SNK**

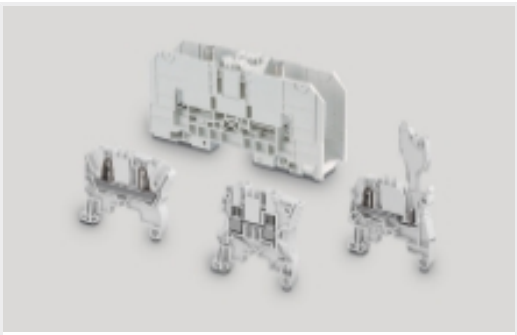

[Modular Terminal Blocks\(319\)](#)



[Terminal Block & Strip Conducting Accessories\(67\)](#)

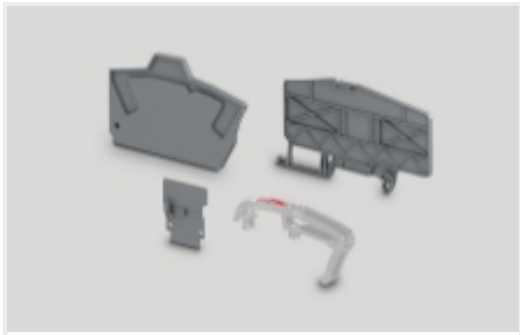

[Terminal Block & Strip Insulating Accessories\(31\)](#)

Customers Also Bought



TE Part #1SNK705072R0000
ZK2.5-3P-WH



TE Part #1838275-1
M12 Fld Ser CONN. Male Pin Sldr



TE Part #1SNK712067R0000
ZK16-3P-PV-BL



TE Part #1SNK706031R0000
ZK4-3P-OR



TE Part #1SNK706021R0000
ZK4-3P-BL



TE Part #1SNK712011R0000
ZK16-3P



TE Part #1SNK706022R0000
ZK4-4P-BL



TE Part #1SNK706020R0000
ZK4-BL



TE Part #1SNK900106R0000
CS-R2



TE Part #1SNK706062R0000
ZK4-RD

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK706060R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK706060R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK706060R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ZK4-YL

English

ENTRELEC Terminal Block - Master Catalog

1SNK706060R0000

PI-Spring Terminal Block, Feed-Through, Yellow, 6 mm [.236 in] Spacing, 2 Position,
DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



[ENTRELEC Terminal Block - Master Catalog](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[Agency Approvals](#)

[Bureau Veritas Marine and Offshore Certificate](#)

English