




Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories

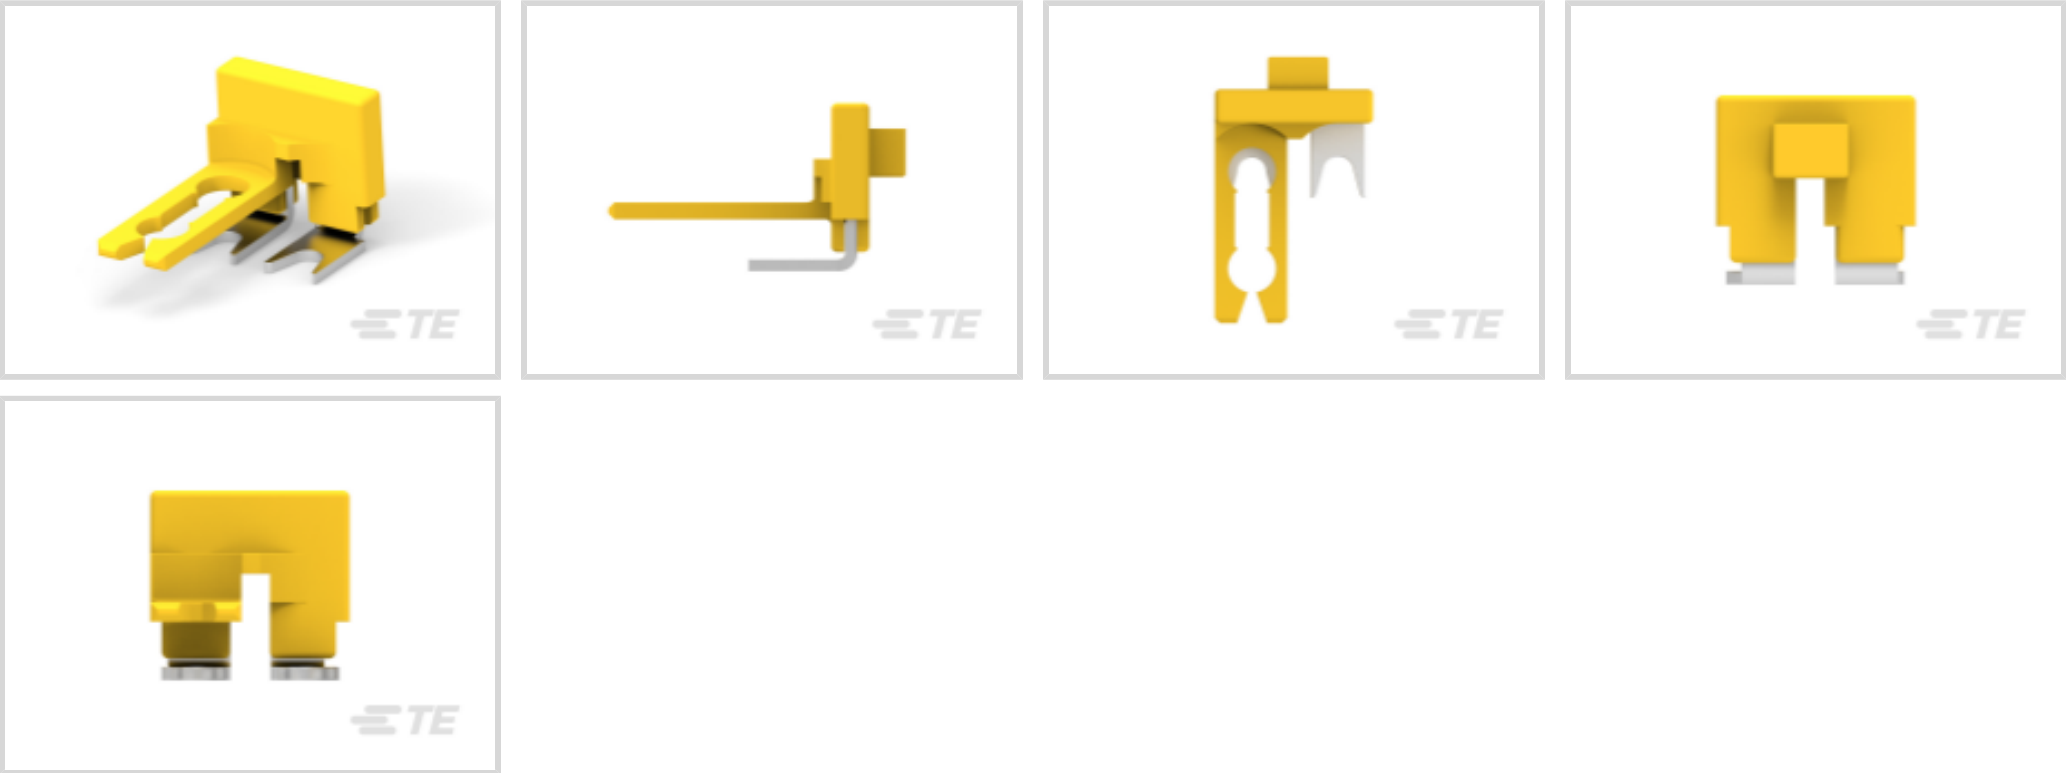

Conducting Accessory Type: **Short Circuit Bridge**

Number of Poles: **2**

Primary Product Color: **Yellow**

Product Spacing: **8 mm [.315 in]**

Contact Current Rating (Max): **5 A**

Features

Product Type Features

Conducting Accessory Type	Short Circuit Bridge
---------------------------	----------------------

Configuration Features

Number of Poles	2
-----------------	---

Electrical Characteristics

Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	5 A
Voltage Rating (IEC)	400 V

Body Features

Plastic & Resin Material Type	Polyamide
Product Weight	2 g[.071 oz]
Primary Product Color	Yellow

Contact Features

Contact Current Rating (Max)	5 A
------------------------------	-----

Dimensions



Product Width	8 mm[.315 in]
Product Depth	13.9 mm[.547 in]
Product Height	24.6 mm[.968 in]
Tool Size	3.5 mm[.138 in]
Product Spacing	8 mm[.315 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts


 TE Part # 1SNA115914R0700 D6/8.ST.RS	 TE Part # 1SNK508011R0000 ZS10-R1	 TE Part # 1SNA115831R0400 D6/8.ST1.RS.IP20	 TE Part # 1SNK508310R0000 ZS10-ST
 TE Part # 1SNK508151R0000 ZS10-PE-R1	 TE Part # 1SNK508311R0000 ZS10-ST-T4		

Also in the Series | ENTRELEC SNK

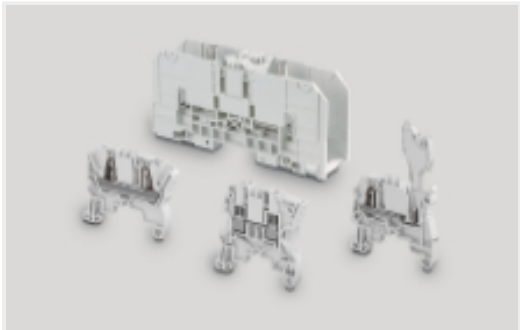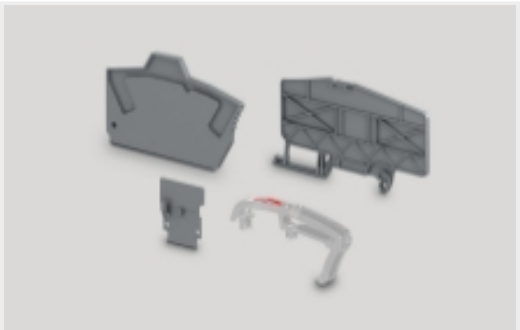 Modular Terminal Blocks(319)	 Terminal Block & Strip Conducting Accessories(67)	 Terminal Block & Strip Insulating Accessories(31)
---	---	--

Customers Also Bought

 TE Part #1SNK900605R0000 LH.	 TE Part #1SNK508151R0000 ZS10-PE-R1	 TE Part #1SNK508311R0000 ZS10-ST-T4	 TE Part #1SNK900653R0000 SC-JB8-3
---	---	--	--

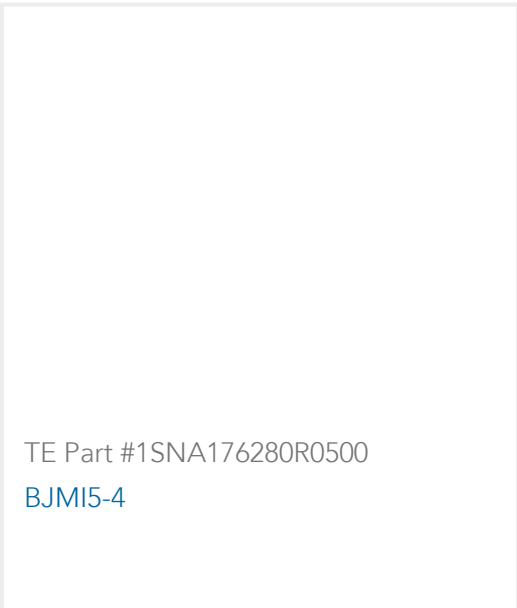

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK900652R0000_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK900652R0000_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK900652R0000_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Catalogue - ENTRELEC terminal-blocks-sna-series

English

SC-JB8-2

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

1SNK900652R0000

Short Circuit Bridge, 2 Pole, Yellow, 8 mm [.315 in] Spacing, -55 – 110 °C [-67 – 230 ° F], ENTRELEC SNK

