2-1377174-3 ACTIVE

PIDG

TE Internal #: 2-1377174-3


Butt Splice, 12 – 10 AWG, 3.31 – 5.26 mm² Wire, Standard, 5180 – 13100 CMA, Copper, Yellow, 42.06 mm [1.656 in] Length, Loose

Piece, PIDG

View on TE.com >



Terminals & Splices > Splices

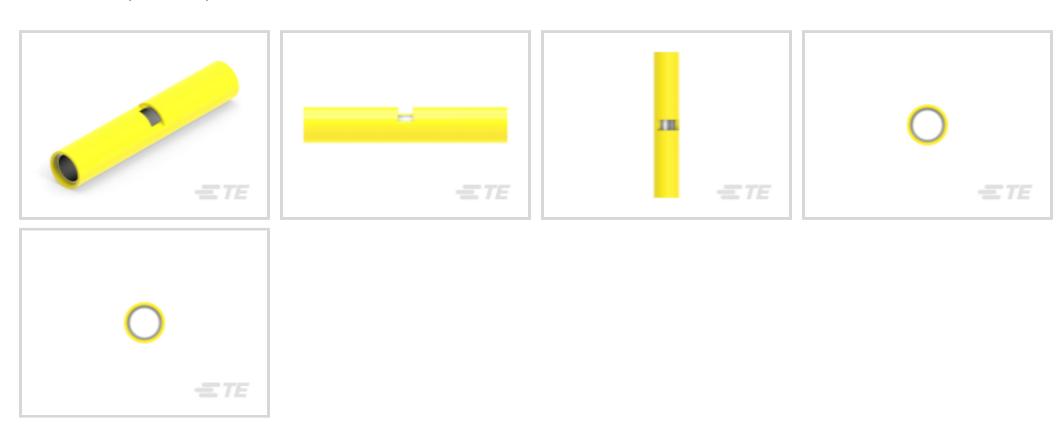

Splice Type: Butt Splice
Wire Size: 3.31 – 5.26 mm²

Sealable: No

Splice Features: Standard

Features

Product Type Features

Splice Accessory Type	Splice
Splice Type	Butt Splice
Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Operating Voltage	600 V
Body Features	
Product Weight	3.824 g
Insulation Material	Nylon
Insulation Type	Pre-Insulated
Splice Features	Standard



Primary Product Color	Yellow
Contact Features	
Military Part Class	Class I, Class II
Contact Base Material	Copper
Barrel Type	Closed
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	5180 – 13100 CMA
Compatible Insulation Diameter Range	5.59 mm[.22 in]
Barrel Inside Diameter	5.64 mm[.222 in]
Product Length	42.06 mm[1.656 in]
Usage Conditions	
Insulation Option	Fully Insulated
Operation/Application	
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	Yes
Packaging Features	
Packaging Quantity	25
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241)



		REACH	CV/II/C
$n \cap T$	CONTAIN	RFA(H	$\sim VH($

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts




Also in the Series | PIDG

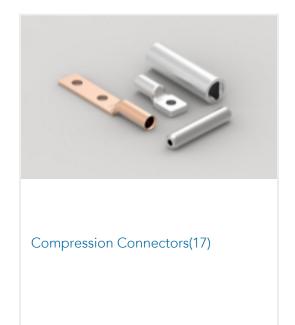



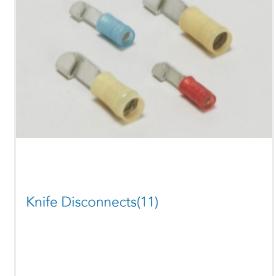


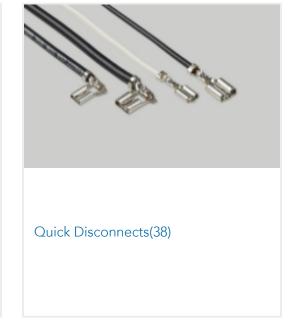







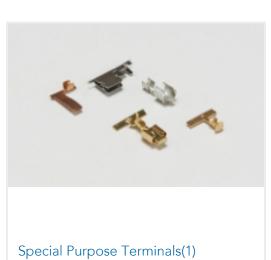



Customers Also Bought



















Documents

Product Drawings SMP 0-0320570-0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1377174-3_C1.2d_dxf.zip

Butt Splice, 12 – 10 AWG, 3.31 – 5.26 mm² Wire, Standard, 5180 – 13100 CMA, Copper, Yellow, 42.06 mm [1.656 in] Length, Loose Piece, PIDG



English

Customer View Model

ENG_CVM_CVM_2-1377174-3_C1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1377174-3_C1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.