
2-1393219-0 - ACTIVE

SCHRACK

TE Internal #: 2-1393219-0 General Purpose Power Relay, DC, Monostable, 1 Form C SPDT-CO, 5 A Contact Rating, 12 VDC Coil Voltage, 250 VAC Contact Voltage, .21 W Coil Power

View on TE.com >

Relays & Contactors > Electromechanical Relays

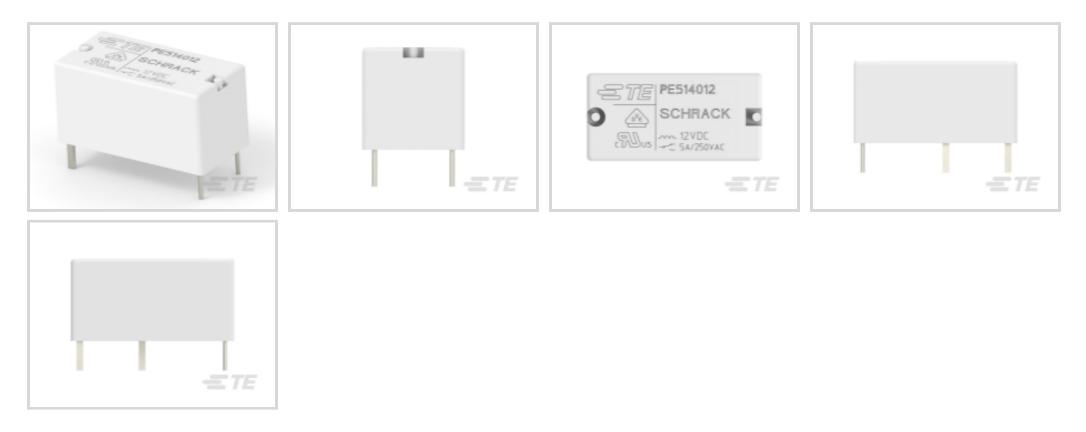

Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Monostable

Contact Arrangement: 1 Form C SPDT-CO

Contact Current Rating: 5A

Features



Product Type Features

Relay & Contactor Type	General Purpose Power Relay
Configuration Features	
Contact Number of Poles	1
Contact Arrangement	1 Form C SPDT-CO
Electrical Characteristics	
Coil Resistance	685 Ω
Contact Switching Voltage (Max)	400 VAC
Contact Current Rating	5 A
Coil Voltage Rating	12 VDC
Contact Voltage Rating	250 VAC
Coil Power Rating DC	.21 W
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Body Features	

Enclosure Type

Flux Resistant Automatic Solder Capable &

2-1393219-0

General Purpose Power Relay, DC, Monostable, 1 Form C SPDT-CO, 5 A Contact Rating, 12 VDC Coil Voltage, 250 VAC Contact Voltage, .21 W Coil Power



	Washable
Contact Features	
Contact Material	AgNi90/10
Termination Features	
Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins
Mechanical Attachment	
Product Mount Type	Board Mount
Dimensions	
Product Width	10 mm[.393 in]
Product Length	20 mm[.787 in]
Product Height	10 mm[.393 in]
Usage Conditions	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Environmental Ambient Temperature (Max)	85 °C[185 °F]
Operation/Application	
Solder Process	Wave Solder Capable

Current Type	DC
Coil Magnetic System	Monostable
Packaging Features	
Packaging Method	Box & Tube, Carton
Other	
Contact Current Class	16 A
Coil Power Rating Class	.2 – .3 W
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247)

2-1393219-0

General Purpose Power Relay, DC, Monostable, 1 Form C SPDT-CO, 5 A Contact Rating, 12 VDC Coil Voltage, 250 VAC Contact Voltage, .21 W Coil Power



Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Wave solder capable to 260°C

Halogen Content

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought



2-1393219-0

General Purpose Power Relay, DC, Monostable, 1 Form C SPDT-CO, 5 A Contact Rating, 12 VDC Coil Voltage, 250 VAC Contact Voltage, .21 W Coil Power







Documents

CAD Files

Customer View Model

ENG_CVM_CVM_2-1393219-0_C2.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_2-1393219-0_C2.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-1393219-0_C2.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Miniature PCB Relay PE

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals VDE Certificate

English