


# SCHRACK | SCHRACK SR6

TE Internal #: 2-1558738-4 Force-Guided Relay, DC, Monostable, 5A (NO) + 1B (NC), 8 A Contact Rating, 12 VDC Coil Voltage, 277 VAC Contact Voltage, SCHRACK SR6

#### View on TE.com >



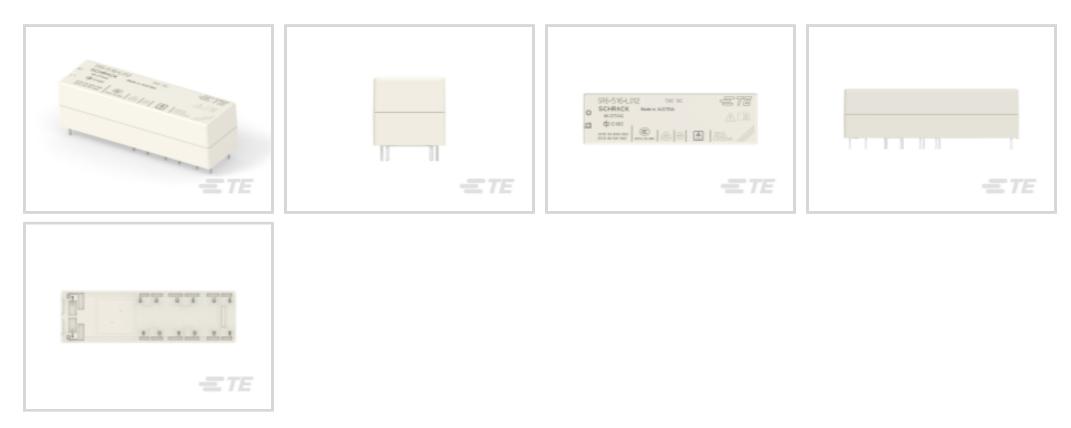

Relay & Contactor Type: Force-Guided Relay

Current Type: DC

Coil Magnetic System: Monostable

Contact Arrangement: 5A (NO) + 1B (NC)

Contact Current Rating: 8A

## All Force Guided Relay with 6 contacts (75)



# Features

# Product Type Features

| Relay & Contactor Type          | Force-Guided Relay |
|---------------------------------|--------------------|
| Configuration Features          |                    |
| Contact Number of Poles         | 6                  |
| Contact Arrangement             | 5A (NO) + 1B (NC)  |
| Electrical Characteristics      |                    |
| Contact Switching Load (Min)    | 1mA @ 5V           |
| Contact Switching Voltage (Max) | 400 VAC            |
| Contact Current Rating          | 8 A                |
| Coil Voltage Rating             | 12 VDC             |
| Contact Voltage Rating          | 300 VDC            |
| Coil Power Rating DC            | .7 W               |
| Body Features                   |                    |

# 2-1558738-4

Force-Guided Relay, DC, Monostable, 5A (NO) + 1B (NC), 8 A Contact Rating, 12 VDC Coil Voltage, 277 VAC Contact Voltage, SCHRACK SR6



| Primary Product Color                   | Natural             |
|---|---------------------|
| Contact Features                        |                     |
| Contact Material                        | AgSnO2              |
| Contact Plating Material                | Gold                |
| Termination Features                    |                     |
| Main Termination & Connection Type      | Solder Pins         |
| Coil Termination & Connection Type      | Solder Pins         |
| Mechanical Attachment                   |                     |
| Product Mount Type                      | Board Mount         |
| Dimensions                              |                     |
| Product Width                           | 16.5 mm[.649 in]    |
| Product Length                          | 55 mm[2.16 in]      |
| Product Height                          | 15.7 mm[.618 in]    |
| Usage Conditions                        |                     |
| Environmental Ambient Temperature (Max) | 85 °C               |
| Operation/Application                   |                     |
| Solder Process                          | Wave Solder Capable |
| Current Type                            | DC                  |
| Coil Magnetic System                    | Monostable          |
| Product Availability                    |                     |
| Product Availability                    | Worldwide           |
| Packaging Features                      |                     |
| Packaging Method                        | Box & Tube          |
| Other                                   |                     |
| Contact Current Class                   | 5 – 10 A            |
| Coil Power Rating Class                 | .6 – .8 W           |
| Environmental Ambient Temperature Class | 70 – 85 °C          |
| Height Class (Mechanical)               | 15 – 16 mm          |
| Length Class (Mechanical)               | 50 – 60 mm          |
| Width Class (Mechanical)                | 16 – 20 mm          |
|   |                     |

# 2-1558738-4

Force-Guided Relay, DC, Monostable, 5A (NO) + 1B (NC), 8 A Contact Rating, 12 VDC Coil Voltage, 277 VAC Contact Voltage, SCHRACK SR6



# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025<br>(247)<br>Candidate List Declared Against: JAN 2025<br>(247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |
| Solder Process Capability                     | Wave solder capable to 260°C  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**



# Also in the Series SCHRACK SR6

### 2-1558738-4

Force-Guided Relay, DC, Monostable, 5A (NO) + 1B (NC), 8 A Contact Rating, 12 VDC Coil Voltage, 277 VAC Contact Voltage, SCHRACK SR6





# Documents

#### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_2-1558738-4\_A1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1558738-4\_A1.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-1558738-4\_A1.2d\_dxf.zip

English

3D PDF

3D

Datasheets & Catalog Pages

Force Guided Relay SR6 Next Generation

English

Product Specifications Definitions General Purpose Relays

English

Agency Approvals UL

English