J1MACD-26XM <

CII | CII 1MAD TO-5 Relay

TE Internal #: 2-1617118-0 General Purpose Signal Relay, DC, Non-Polarized, Monostable, 1 Form C SPDT-CO, 1 A Contact Rating, 26 VDC Coil Voltage, CII 1MAD TO-5 Relay

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Signal Relay

Current Type: DC

Coil Magnetic System: Non-Polarized, Monostable

Contact Arrangement: 1 Form C SPDT-CO

Contact Current Rating: 1A

Features

Product Type Features

Relay & Contactor Type

connectivity

General Purpose Signal Relay

Configuration Features

Coil Special Features	Coil Polarity Protection Diode, Coil Suppression Diode			
Contact Arrangement	1 Form C SPDT-CO			
Electrical Characteristics				
Coil Resistance	2000 Ω			
Contact Switching Voltage (Max)	28 VDC			
Contact Current Rating	1 A			
Coil Voltage Rating	26 VDC			
Coil Power Rating DC	.351 W			
Body Features				
Enclosure Type	Hermetically Sealed			
Termination Features				
Main Termination & Connection Type	Extended Leads			
Coil Termination & Connection Type	Extended Leads			
Mechanical Attachment				

C For support call+1 800 522 6752

J1MACD-26XM

General Purpose Signal Relay, DC, Non-Polarized, Monostable, 1 Form C SPDT-CO, 1 A Contact Rating, 26 VDC Coil Voltage, CII 1MAD TO-5 Relay



Product Mount Type	Board Mount	
Usage Conditions		
Operating Temperature Range	-65 – 125 °C	
Environmental Ambient Temperature (Max)	125 °C[257 °F]	
Operation/Application		
Vibration Resistance	30G's, 10 – 3000Hz	
Shock Resistance	75G's, 6ms	
Current Type	DC	
Coil Magnetic System	Non-Polarized, Monostable	
Product Compliance for compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Not Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223)	

Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not lead free process capable

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


J1MACD-26XM

General Purpose Signal Relay, DC, Non-Polarized, Monostable, 1 Form C SPDT-CO, 1 A Contact Rating, 26 VDC Coil Voltage, CII 1MAD TO-5 Relay





Also in the Series | CII 1MAD TO-5 Relay

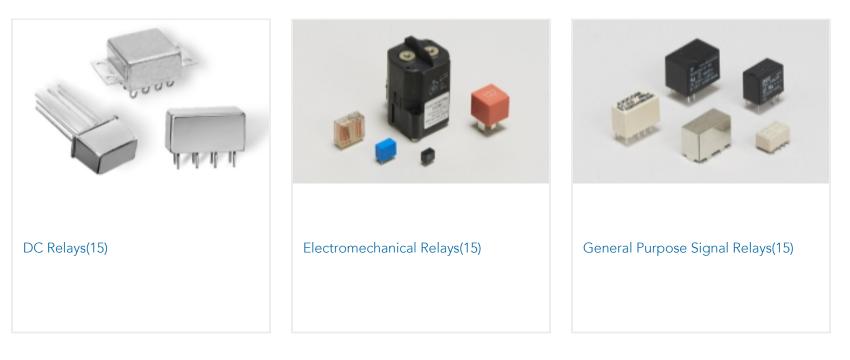


Customers Also Bought



TE Part #1-146134-7	TE Part #1-1761606-6	TE Part #2-1761679-9	TE Part #5650462-4
10 MODII HDR DRST SFMNT B/A	IDC LOW PRO HDR 60P VERT LA	IDC LOW PRO HDR 26P VERT BLUE	ASSY,RECEPTACLE,EUROCARD,TYPE



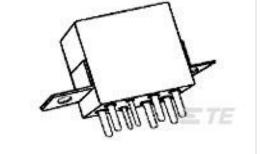

TE Part #4-1617758-3

FCB-205-0219L=M83536/2-019L



TE Part #1-1624097-0

3615A-10-3521-10 4.7UH



TE Part #5148412-5 ASSY,PIN,R.A.,TYPE M,EUROCARD,L-FREE,60+

TE Part #354111-E STVM 60-4 F ABC VVV 7-00 TL 4,0 * 247 E



J1MACD-26XM

General Purpose Signal Relay, DC, Non-Polarized, Monostable, 1 Form C SPDT-CO, 1 A Contact Rating, 26 VDC Coil Voltage, CII 1MAD TO-5 Relay



Documents

CAD Files 3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1617118-0_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1617118-0_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1617118-0_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5_sec1_MA

English

RELAY

English