

CII | CII FCA-125 Series TE Internal #: 2-1617748-8 General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 28 VDC Coil Voltage, Socket Mount, CII FCA-125 Series

View on TE.com >

Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: General Purpose Power Relay

Current Type: DC

Coil Magnetic System: Polarized, Monostable

Contact Arrangement: 1 Form C SPDT-CO

Contact Current Rating: 25 A

Features

Product Type Features

Relay & Contactor Type

E TE connectivity

General Purpose Power Relay

Configuration Features

Coil Special Features	Coil Suppression Diode					
Relay Options	Back EMF Suppression					
Contact Arrangement	1 Form C SPDT-CO					
Electrical Characteristics						
Coil Resistance	320 Ω					
Contact Current Rating	25 A					
Coil Voltage Rating	28 VDC					
Body Features						
Enclosure Type	Hermetically Sealed					
Contact Features						
Contact Material	Silver Cadmium Oxide					
Terminal Plating	Gold					
Termination Features						
Main Termination & Connection Type	Socket Pins					
Coil Termination & Connection Type	Socket Pins					

FCA-125-22

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 28 VDC Coil Voltage, Socket Mount, CII FCA-125 Series



Mechanical Attachment

F	Product	Mounting	Feature	Туре
	100000	mounting	routuro	1)20

Product Mount Type

Usage Conditions

Operating Temperature Range

Environmental Ambient Temperature (Max)

Operation/Application

Vibration Resistance

Shock Resistance

Current Type

Coil Magnetic System

Mounting Brackets

Socket Mount

-70 – 125 °C[-94 – 257 °F]

125 °C[257 °F]

30G's, 10 - 3000Hz

200G's, 6ms

DC

Polarized, Monostable

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

Not Compliant

Not Compliant

Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (10% in Component Part) Cadmium oxide (3% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

FCA-125-22

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 28 VDC Coil Voltage, Socket Mount, CII FCA-125 Series



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TE Part # 5-1617827-4 FCA-150-KY3=50 AMP 1PST/NO DM RELAY

TE Part # 5-1617827-6 FCAC-150-KU3=50 AMP MID-RANGE RELAY

TE Part # 6-1617753-3 FCA-325-CY2



TE Part # 5-1617826-5 FCA-150-KM4=RELAY

Also in the Series CII FCA-125 Series




Customers Also Bought



FCA-125-22

General Purpose Power Relay, DC, Polarized, Monostable, 1 Form C SPDT-CO, 25 A Contact Rating, 28 VDC Coil Voltage, Socket Mount, CII FCA-125 Series



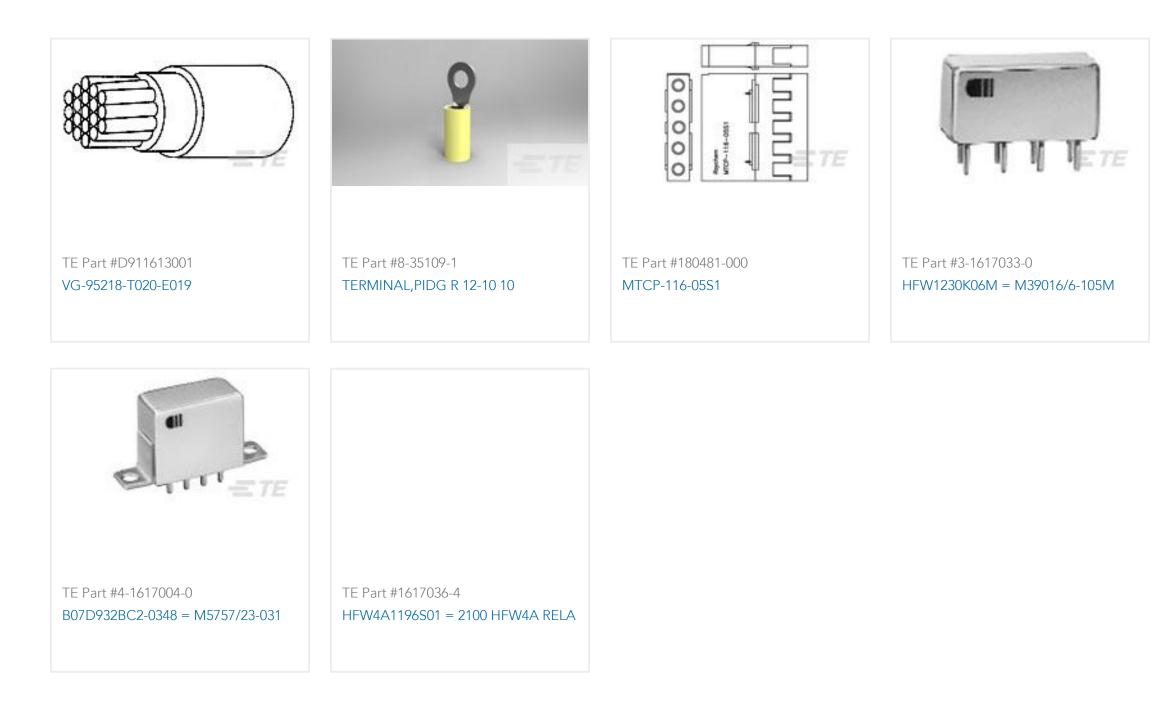

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-1617748-8_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-1617748-8_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-1617748-8_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5_sec5_FCA-125

English

RELAY

English