

SlimSeal | SlimSeal Standard Connectors

TE Internal #: 2-2106124-2


Wire-to-Wire, 1 Position, .1 mm [2.5 in] Centerline, Sealable, Wire & Cable, 400 VAC, SlimSeal Standard Connectors, Plug & Socket

Lighting Connectors

View on TE.com >



Connectors > Lighting Connectors > Plug & Socket Lighting Connectors

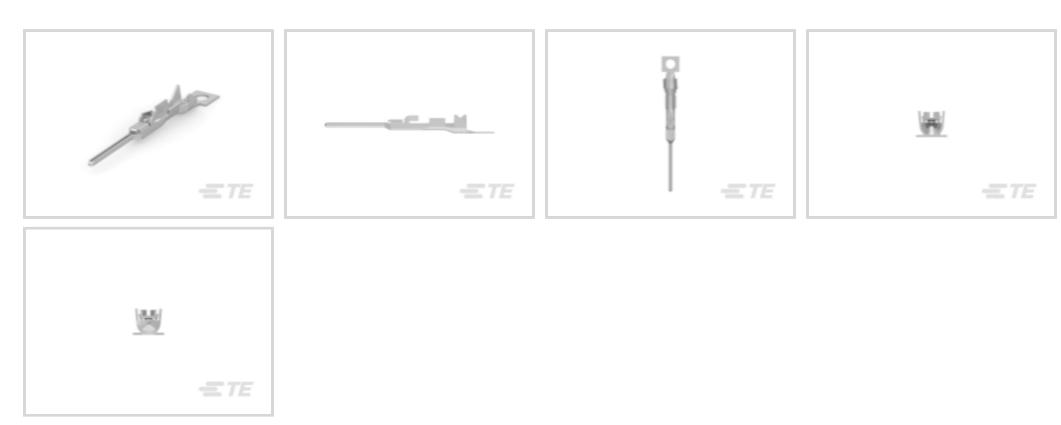

Connector System: Wire-to-Wire

Number of Positions: 1

Centerline (Pitch): .1 mm [2.5 in]

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Product Type Features	
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Electrical Characteristics	
Operating Voltage	300 VDC
Body Features	
Primary Product Color	Black
Contact Features	
Contact Current Rating (Max)	3.5 A
Housing Features	

.1 mm[2.5 in]

Centerline (Pitch)



Usage Conditions

Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
-----------------------------	----------------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts















Also in the Series | SlimSeal Standard Connectors







Plug & Socket Lighting Connectors(20)

Customers Also Bought



TE Part #3-2180324-2 zSFP+ STACKED 2X4 RECEPTACLE **ASSEMBLY**




TE Part #2170088-2 ZSFP+ Connector,15u"



TE Part #2154854-1 SlimSeal Assembly, Plug, 1 position



TE Part #1-2106123-3 CONTACT, RECEPT, SLC, GOLD PLATE, ON STRI

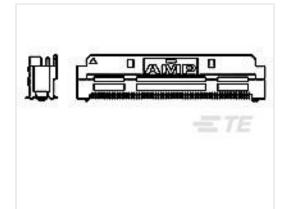

TE Part #316915-1 Z-STACK CONN 240P F16 ASSY



TE Part #2106135-2 Assembly, Free Hanging Plug, SLC, 2



TE Part #2106136-2 Assembly, Receptacle, 2-Position



TE Part #2106135-4 Assembly, Free Hanging Plug, SLC, 4 pos



TE Part #42111-2 RING TONGUE TERMINAL 18-14 **AWG TPBR**



TE Part #2154852-1 SlimSeal Assy, Receptacle, 1-Position



Documents

Product Drawings

Contact, Tab, Tin Plated, 22-26 AWG

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-2106124-2_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2106124-2_A1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-2106124-2_A1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SLIMSEAL_SSL_CONNECOTS

English

Product Specifications

Application Specification

English