



Connectors > Pluggable IO Connectors & Cages



Form Factor: SFP+

Pluggable I/O Product Type: Cage Assembly

Sealable: Yes

Circuit Application: Signal

Operating Temperature Range: -55 – 105 °C [-67 – 221 °F]

Features

Product Type Features

Cage Type	Single
Form Factor	SFP+
Pluggable I/O Product Type	Cage Assembly
Sealable	Yes

Configuration Features

Number of Ports	1
Port Matrix Configuration	1 x 1

Electrical Characteristics

Data Rate (Max)	16 Gb/s
-----------------	---------

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	3 mm[.118 in]

Housing Features

Cage Material	Nickel Silver Alloy
---------------	---------------------

Dimensions



PCB Thickness (Recommended)	3 mm[.118 in]
-----------------------------	---------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Pluggable I/O Applications	SFP+
Heat Sink Compatible	No
Circuit Application	Signal

Other

Included Lightpipe	No
EMI Containment Feature Type	Internal/External EMI Springs

Product Compliance

For compliance documentation, visit the product page on TE.com>











EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.



Compatible Parts

 <p>TE Part # 4-2821222-5 SFP56 DIRECT ATTACH CA, 2M, 30AWG</p>	 <p>TE Part # CAT-C11-N4901114 SFP28 to SFP28 Cable Assembly: 30 AWG</p>	 <p>TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG</p>	 <p>TE Part # CAT-C11-N49011 SFP28 to SFP28 Cable Assembly: 26 AWG</p>
 <p>TE Part # 4-2821224-5 SFP56 DIRECT ATTACH CA, 3M, 26AWG</p>	 <p>TE Part # CAT-Q17-N49011 QSFP56-Four SFP56 Cable Assembly: 30 AWG</p>	 <p>TE Part # 4-2334985-2 SFP56 DIRECT ATTACH CA, 1M, 32AWG</p>	 <p>TE Part # CAT-C11-N490333 QSFP28-Four SFP+ Cable Assembly: 30 AWG</p>
 <p>TE Part # CAT-C11-N490325 QSFP28-Four SFP+ Cable Assembly: 26 AWG</p>	 <p>TE Part # CAT-Q17-N490333 QSFP56-Four SFP56 Cable Assembly: 26 AWG</p>		


Customers Also Bought

 <p>TE Part #1934949-1 Tinman 5pr 8col vert recpt 15mm stack</p>	 <p>TE Part #1734100-3 Champ050 series,30pos,Au over PdNi</p>	 <p>TE Part #1734101-3 Champ050 series,30pos,Au over PdNi</p>	 <p>TE Part #6-2213362-2 RCPT ASSY,DIMMABLE PHOTOCONTROL,150C,3 P</p>
---	--	--	--






TE Part #5-1375870-4
RCPT ASSY,12 POS,VERT,0.8MM MI

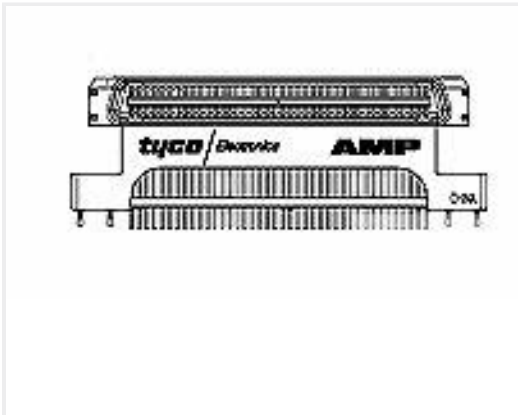

TE Part #1734375-1
CHAMP .050 HIGH RISE, REVERSED



TE Part #1757256-1
SMPM FEMALE BULLET ADAPTER



TE Part #2132529-3
IMP100S,H,V3P6C,LG,REW39,5.5



TE Part #2349202-5
SFP56 STACKED 2X1 RECEPTACLE ASSEMBLY



TE Part #2007808-2
IMP100S,H,V4P10C,LG,OEW46,4.9

Documents

Product Drawings

SFP+ 1x1 Cage Assembly, Press-

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2170680-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2170680-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2170680-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English