




Switches > Push Button Switches

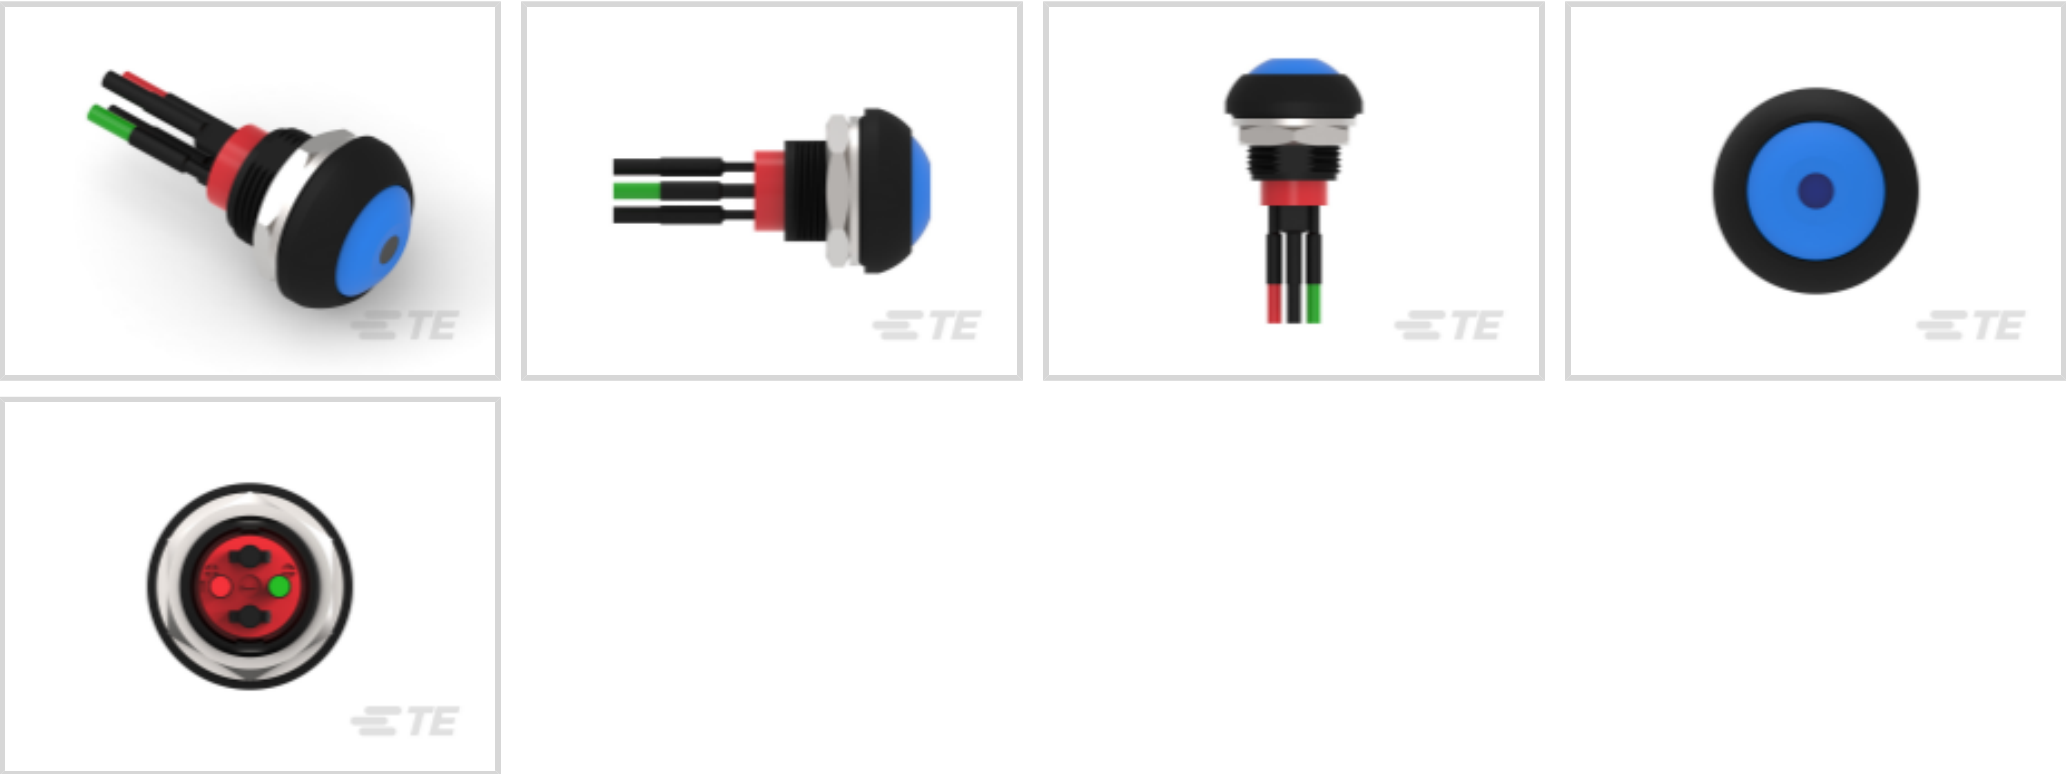

Push Button Switch Product Type: **General Purpose Push Button Switch**

Configuration (Pole-Throw): **Single Pole - Single Throw**

Number of Actuators: **Single**

Actuator Profile: **Flush**

Bushing Style: **Threaded**

Features

Product Type Features

Switch Connection Type	Long Leads
Push Button Switch Product Type	General Purpose Push Button Switch
Illuminated	With
Actuator Style	Round Actuator

Configuration Features

Configuration (Pole-Throw)	Single Pole - Single Throw
Number of Actuators	Single
Snap Action	Without
Support Bracket	Without
Switch Feedback Type	Auditory
Operating Function	Momentary

Electrical Characteristics

Contact Current Rating	.12 A
Operating Voltage Range	50 VDC



Body Features

Case Material	Diallyl Phthalate (DAP)
Actuator Material	Polyamide
Product Orientation	Vertical
Actuator Force	306 – 612 g[10.8 – 21.6 oz]
Actuator Profile	Flush
Bushing Style	Threaded
Bushing Thread Size	M12 x .75
Actuator Color	Blue

Contact Features

Switch Contact Plating Material	Gold over Silver
---------------------------------	------------------

Housing Features

Process Sealed	Yes
----------------	-----

Industry Standards

IP Rating	IP68
-----------	------

Packaging Features

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (4% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2329387-4
PB OFF/ON FC BLK M1 TERM GRE
LED IP68

TE Part # 2329359-1
PN OFF/ON HC BLK M1 TERM IP68
500MM LHS

TE Part # 2329383-3
PB OFF/ON FC YLW M1 TERM. IP68

TE Part # 2329359-2
PN OFF/ON HC RED M1 TERM IP68
500MM LHS

TE Part # 2329361-3
PB OFF/ON RC YLW M1 TERM IP68
500MM L

Also in the Series | Alcoswitch PB6

General Purpose Push Button Switches
(165)

Push Button Switches(165)

Customers Also Bought






TE Part #1-480701-4
03P UMNL CAP HSG YELL



TE Part #1-480700-4
03P UMNL PLUG HSG YELL



TE Part #1879417-8
CPF0603 1M0 0.1% 25PPM 5K RL



TE Part #1-2329388-1
PB OFF/ON FC YLW M1 TERM WHI
LED IP68 50



TE Part #CAT-HST-DWTC
DWTC Heat Shrink Tubing



TE Part #1-480699-5
02P UMNL CAP HSG GRN



TE Part #1-480703-5
04P UMNL CAP HSG GRN



TE Part #926900-3
UNIV-MNL STIFT

TE Part #1-350779-5
04P UMNL V0 PLUG HSG GREEN

Documents

Product Drawings

PB OFF/ON FC BLU M1 TERM BLU LED IP68 50

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2329389-5_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2329389-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2329389-5_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



IP68 Sub Mini PB Data Sheet

English