2-2331102-1 ACTIVE

AMP | LEAVYSEAL

TE Internal #: 2-2331102-1

PCB Mount Header, Vertical, Wire-to-Board, 46 Position, 4 mm [.

157 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole -

Solder, LEAVYSEAL

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > LEAVYSEAL Connector Headers











PCB Connector Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Wire-to-Board

Number of Positions: 46
Number of Rows: 3

All LEAVYSEAL Connector Headers (22)

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

PCB Mount Orientation	Vertical
Number of Positions	46
Number of Rows	3

Body Features



Connector & Keying Code	В
Primary Product Color	Gray
Contact Features	
Mating Tab Thickness	.64 mm[.025 in]
Contact Size	1.5mm
Mating Tab Width	1.5 mm[.059 in]
Contact Mating Area Plating Material	Silver (Ag)
Contact Type	Tab
Contact Current Rating (Max)	23 A
Termination Features	
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
PCB Mount Retention	With
DCD Mount Alicement	
PCB Mount Alignment	With
Connector Mounting Type	With Board Mount
Connector Mounting Type	Board Mount
Connector Mounting Type Mating Alignment	Board Mount
Connector Mounting Type Mating Alignment Housing Features	Board Mount With
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch)	Board Mount With
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch) Usage Conditions	Board Mount With 4 mm[.157 in]
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch) Usage Conditions Operating Temperature (Max)	Board Mount With 4 mm[.157 in] 130 °C[266 °F]
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch) Usage Conditions Operating Temperature (Max) Operating Temperature Range	Board Mount With 4 mm[.157 in] 130 °C[266 °F]
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch) Usage Conditions Operating Temperature (Max) Operating Temperature Range Operation/Application	Board Mount With 4 mm[.157 in] 130 °C[266 °F] -40 – 130 °C[-40 – 266 °F]
Connector Mounting Type Mating Alignment Housing Features Centerline (Pitch) Usage Conditions Operating Temperature (Max) Operating Temperature Range Operation/Application Circuit Application	Board Mount With 4 mm[.157 in] 130 °C[266 °F] -40 – 130 °C[-40 – 266 °F]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | LEAVYSEAL

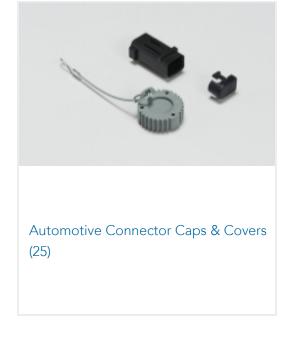

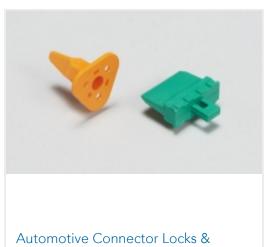


Position Assurance(4)

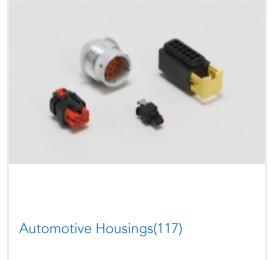


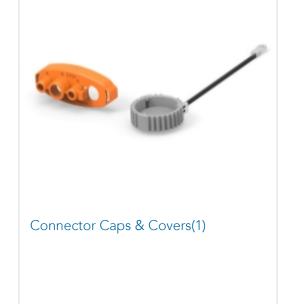



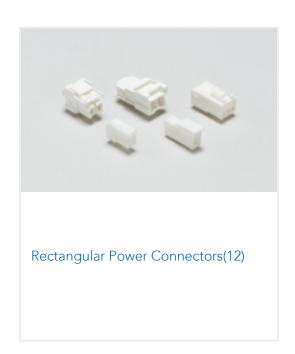

Customers Also Bought

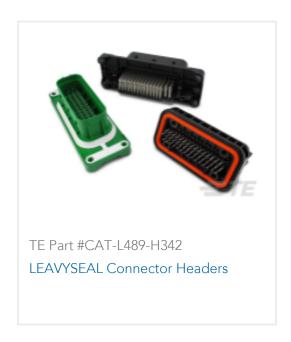















Documents

Product Drawings

TAB HEADER 46POS.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2331102-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2331102-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2331102-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

PCB Mount Header, Vertical, Wire-to-Board, 46 Position, 4 mm [.157 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Solder, LEAVYSEAL



Datasheets & Catalog Pages

LEAVYSEAL CONNECTORS

English

Product Specifications

Application Specification

English