# 2-2399607-1 <

### PowerTube | PowerTube HVP-HD 1400

TE Internal #: 2-2399607-1 Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400

#### View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles > PowerTube HVP-HD 1400 180° Headers



Connector System: Bus Bar-to-Wire

Number of Positions: 2

Number of Rows: 1

Centerline (Pitch): 47 mm [1.85 in ]

Header Type: Fully Shrouded

### All PowerTube HVP-HD 1400 180° Headers (90)

## Features

### **Product Type Features**

Connector Shape	Circular			
Connector System	Bus Bar-to-Wire			
Header Type	Fully Shrouded			
Sealable	Yes			
Connector & Contact Terminates To	Bus Bar			
Connector Product Type	Connector Assembly			
Configuration Features				
Configuration Features				
Configuration Features Number of Positions	2			
	2 1			
Number of Positions				
Number of Positions Number of Rows				

Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



## **Body Features**

Usage Conditions

Connector & Keying Code	A/B				
Primary Product Color	Black, Natural				
Contact Features					
Mating Pin Diameter	14 mm[.55 in]				
Contact Mating Area Plating Material	Silver (Ag)				
Contact Type	Pin				
Termination Features					
Termination Method to PCB	Through Hole - Screw				
Mechanical Attachment					
Mating Alignment Type	Polarization				
PCB Mount Retention	Without				
Connector Mounting Type	Panel Mount				
Mating Alignment	With				
Housing Features					
Centerline (Pitch)	47 mm[1.85 in]				

Operating Temperature (Max)	140 °C[284 °F]					
Operating Temperature Range	-40 – 140 °C[-40 – 284 °F]					
Operation/Application						
Circuit Application	Power					
Industry Standards						
IP Rating	IP6K9K					
UL Flammability Rating	UL 94V-0					
Packaging Features						
Packaging Method	Tray					
Product Compliance						
For compliance documentation, visit the product page on TE.com>						
EU RoHS Directive 2011/65/EU	Compliant					
EU ELV Directive 2000/53/EC	Compliant					

**C** For support call+1 800 522 6752

Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Dodecamethylcyclohexasiloxane (D6) (.71% in 27796544235) Decamethylcyclopentasiloxane (D5) (2.41% in 30409226519) Octamethylcyclotetrasiloxane (D4) (10% in Component Part) Atticle Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
alogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400






TE Part # 2446256-3 HD1400 PRE-ASSY SU-BEAM,NO TPA, FINGER




# Also in the Series | PowerTube HVP-HD 1400

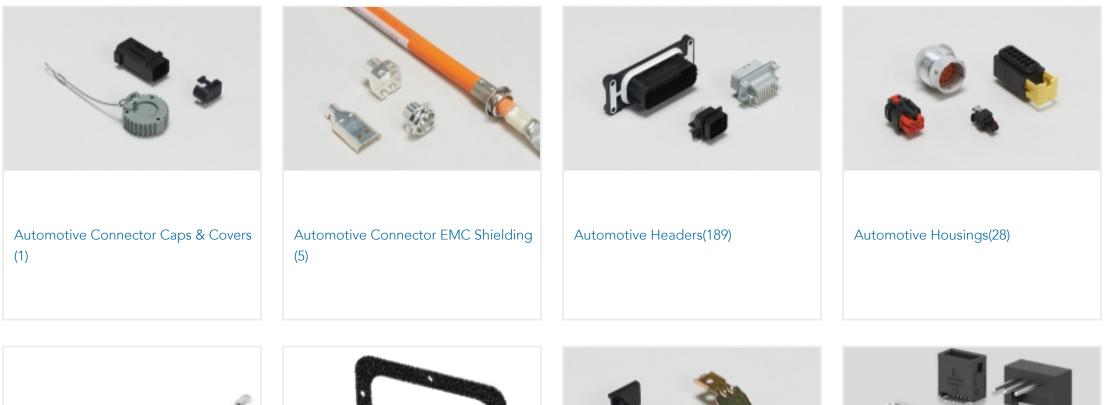










Connector Caps & Covers(1)	Connector Seals & Cavity Plu	gs(9) Other Automotiv	ve Connector	PCB Headers & Receptacles(189)
		Accessories(29)		

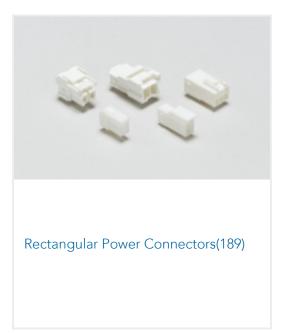


# Customers Also Bought



Bus Bar-to-Wire, 2 Position, 47 mm [1.85 in] Centerline, Fully Shrouded, Silver (Ag), Through Hole - Screw, Sealable, Power, PowerTube HVP-HD 1400



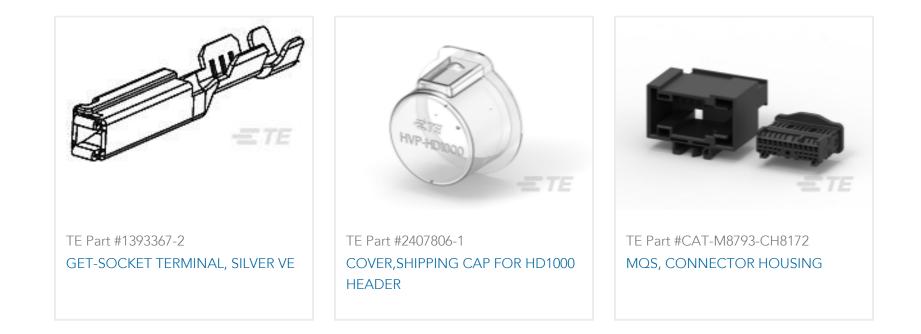

## Documents

### **CAD** Files

**Customer View Model** 

ENG\_CVM\_CVM\_2-2399607-1\_D.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2399607-1\_D.3d\_stp.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2399607-1\_D.3d\_igs.zip

English

### 3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use

### Datasheets & Catalog Pages **HIVONEX CONNECTORS & CHARGING SOLUTIONS**

English

**Product Specifications Application Specification** 

English